

LIGHTING SYSTEMS

Ivy Profile - Recessed

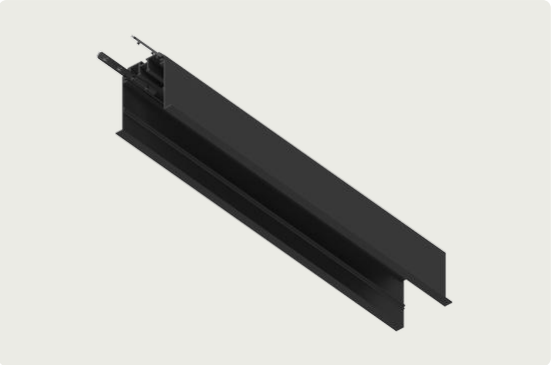

Code
1E4160

COLOUR

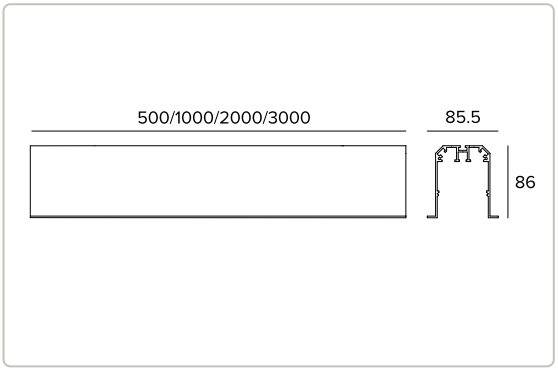

The figures on the drawing are expressed in mm.

2.15 CE

Technical Data

Concept

Recessed installation profile for ceiling/wall mounting needed for the installation of the lighting modules.

Mechanical characteristics

Extruded aluminum profile protected with a layer of black anodization with a minimum thickness of 15µ.

Colour and finish	Black anodized
Dimensions	AxBxH 1000x86x86mm
Weight	2.15Kg
Version	Recessed

Notes

Linear connection joint already included in the packaging. Extruded plastic aesthetic cover available as accessory.

Regulations and Certifications

CE

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes

End Caps



CODE	COLOUR
1E4258	●

End caps made of 2 pieces.
For trimless installation profile.

Accessories

Mechanical connector



CODE	COLOUR
1E4259	●

L shaped joint planar.
For trimless installation profile.



CODE	COLOUR
1E4260	●

L shaped joint concave.
For trimless installation profile.



CODE	COLOUR
1E4261	●

L shaped joint convex.
For trimless installation profile.

Cover Panel



CODE	COLOUR	L
1E4170	●	2000mm

Extruded plastic cover.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.