

Ceiling, Suspensions and Wall

SLIM Line



TARGETTI

SLIM

Suspension

GENERAL INFO

Indirect or direct/indirect modular suspension for LED sources.

LED

Linear Board LED Low Power High Efficiency
From 2590lm to 11240lm
3000K
Ra80

PRODUCT EFFICACY

Up to 114lm/W

OPTICS

VWFL

POWER SUPPLY


Electronic

MATERIAL

Body made of extruded anodised aluminium. Polycarbonate lateral end caps. Transparent polycarbonate upper safety screen. Lower diffusive screen made of ribbed, extruded opal polycarbonate.

ON DEMAND


 Ra90

 4000K

Minimal modular suspension fixture with indirect or direct/indirect light emission with a compact size to disappear into the environment to leave space for just the architecture and the light.

Available in a modular linear system version or stand alone.

Coordinable with the indirect or direct/indirect light wall solution.

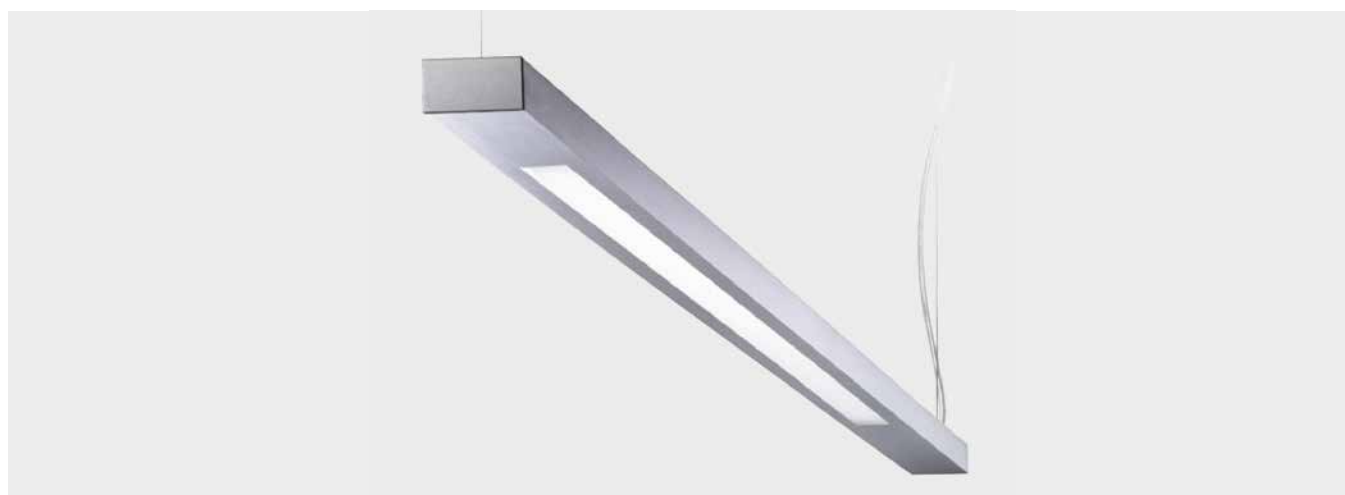

Indoor

SLIM



Line Indirect
L. 1800mm



LED / 18W / INDIRECT / VWFL									
	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	Driver	Colour	3000K	
	Ra80		117°	115°		EL.		1T4186	
	Fixture Power	21W	1	3.27	3.12	822			
	Source Flux	2590lm	2	6.53	6.25	206			
	Fixture Flux	2352lm	3	9.80	9.37	91			
	Efficacy	112lm/W	4	13.07	12.49	51			
	TS751	I _{max} =318cd/klm	I _{max}	824cd	5	16.34	15.62	33	




Line Indirect
L. 3370mm



LED / 36W / INDIRECT / VWFL									
	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	Driver	Colour	3000K	
	Ra80		117°	115°		EL.		1T4188	
	Fixture Power	42W	1	3.27	3.12	1645			
	Source Flux	5180lm	2	6.53	6.25	411			
	Fixture Flux	4705lm	3	9.80	9.37	183			
	Efficacy	112lm/W	4	13.07	12.49	103			
	TS751	I _{max} =318cd/klm	I _{max}	1648cd	5	16.34	15.62	66	



Line Direct/Indirect
L. 1800mm




LED / 39W / DIRECT/INDIRECT / VWFL									
	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	Driver	Colour	3000K	
	Ra80		88°	95°		EL.		1T4187	
	Fixture Power	44W	1	1.91	2.19	818			
	Source Flux	5620lm	2	3.83	4.38	205			
	Fixture Flux	4193lm	3	5.74	6.56	91			
	Efficacy	95lm/W	4	7.66	8.75	51			
	TS752	I _{max} =147cd/klm	I _{max}	824cd	5	9.57	10.94	33	

SLIM



Line Direct/Indirect L. 3370mm



LED / 78W / DIRECT/INDIRECT / VWFL

72

IP20

240°

180°

120°

60°

0°

30°

60°

90°

120°

150°

180°

210°

240°

270°

300°

330°

360°

	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80		88°	95°	
Fixture Power	88W	1	1.91	2.19	1636
Source Flux	11240lm	2	3.83	4.38	409
Fixture Flux	8385lm	3	5.74	6.56	182
Efficacy	95lm/W	4	7.66	8.75	102
TS752	Imax=147cd/klm	Imax	1648cd	5	9.57 10.94 65

	Driver	Colour	3000K
	EL.		1T4189

Related codes

Power Supply Kit	
Code	Code
1V7213	1V7523
Off-centre circular canopy complete with feeding cable L 2000mm. Maximum power 2kW. For single switching.	Off-centre square canopy complete with feeding cable L 2000mm. Maximum power 2kW. For single switching.

Accessories

Canopy	
Code	Code
1V7524	1V7213AB
Canopy without feeding cable. Square.	Canopy without feeding cable. Circular.
Suspension	
L	Code
10000	1V7264
Steel suspension cable. Accessory to be ordered only for installations higher than 2000mm.	
Cable	
L	Code
5000	1V7262
10000	1V7263
Three pole feeding cable. Accessory to be ordered only for installations higher than 2000mm.	

Indoor

SLIM

Mechanical connector



Code

1V7344

Joint for connecting two modules in a straight line. For the codes: 1T4186, 1T4187, 1T4188.



Code

1V7345

Joint for connecting two modules at 90°. For the codes: 1T4186, 1T4187, 1T4188.

Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.

Consorzio ecolight

Targetti Sankey Spa is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.

The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium. The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.



TARGETTI SANKEY SpA

Certificated ISO 9001 n° 9130. TAR1
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

Light beam apertures

from	to	beam	
5°	10°	Narrow Spot	NSP
11°	25°	Spot	SP
26°	40°	Flood	FL
41°	50°	Medium Wide Flood	MWFL
51°	70°	Wide Flood	WFL
71°	120°	Very Wide Flood	VWFL
		Wall Washer	WW
		Narrow Asymmetric	N. ASYM
		Asymmetric	ASYM

Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

Particular symbols

	Weight of the single fixture.
	Cable length.
	Walk-over.
	Driver-over safe.
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
DBS	Dynamic Beam Shaper optical technology with remote management of the beam opening.
	LED with $Ra_{__}$ where not present in the catalogue, available on request.
	Different colour temperatures available on request.
	Custom finish of your choice from the Targetti Colours range and RAL indicated in the colour chart can be downloaded on line from the download section.
	Treatment carried out on request.
	Supplied on request with an integrated or remote 110-277Vac power supply as indicated for the standard model.
	LED version with a different "Tunable White" tone available on request.

Note

- ➔ Please contact us for on demand treatments and versions.
- ➔ The performances reported on the products refer to the use of the recommended drivers.
- ➔ The drivers selected by Targetti make the fixtures "Safe Flicker".

