TRACK PROJECTORS


Ray 115 Reflector HO



Code
T033SPR940ELPW


LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 90	SP 14°	57W 5596lm

POWER SUPPLY CONTROL	COLOUR
220-240Vac ON-OFF	

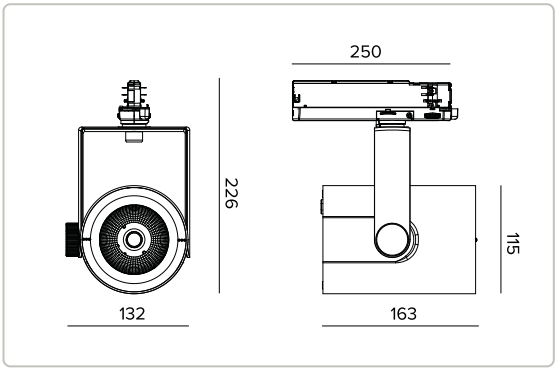

The figures on the drawing are expressed in mm.





TS832	Imax=8119cd/klm	4000K		H(m)	D(m)	Emax(lx)
		Ra90			14°	
		Fixture Power	57W	1	0.24	53913
		Source Flux	6640lm	2	0.48	13478
		Fixture Flux	5596lm	3	0.72	5990
		Efficacy	98lm/W	4	0.96	3370
		Imax	53913cd	5	1.20	2157

Technical Data

Concept

Professional adjustable LED projector.

Source

High efficiency Chip on Board LED Ra90. Ra97 on request.	
Energy efficiency class	E
Nominal power	50W
Nominal flux	6640lm
Colour rendering index	90
Rf	90
Rg	98
CCT nominal	4000K
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Reflector with ellipsoidal facets in reflective anodised aluminium. Interchangeable reflectors available as accessories.

Optic	SP
Beam angles	SP
Optical efficiency	84.28%
Fixture flux	5596lm
Luminous efficacy	98lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted die-cast aluminium body. Black painted polycarbonate front ring. Adjustable from 0° to -90° on the vertical plane and 359° on the horizontal plane. Mechanical beam locking system on the vertical plane and friction beam locking system on the horizontal plane. The centre of gravity always remains in axis with the track regardless of the aiming.

Colour and finish	Plaster white
Dimensions	ØxH 115x163mm
Weight	1.2Kg
Degree of protection	IP20

Electrical characteristics

ON-OFF electronic driver integrated into the track adapter.

Fixture Power	57W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 2
Type of driver / Control	ON-OFF
Driver included	YES
Ambient temperature	0°C / +25°C

Installation

Electrified track mounting. Optical accessories that can be installed with a support ring are available.

Regulations and Certifications

CE

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Cut-off



CODE	Ø
1T3142	80mm

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.


Ray Shade



CODE	Ø
A025	118mm

Adjustable barn doors flaps made of black painted steel.

Optic



CODE	OPTIC	Ø
A057SPR	SP 14°	80mm
A057MFR	FL 25°	80mm
A057MWR	MWFL 45°	80mm

Interchangeable anodised reflective aluminium reflectors.
Available in Spot, Flood and Medium Wide Flood beams.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.