


LIGHTING SYSTEMS

Ivy Profile - Surface

Code
1E4157

COLOUR

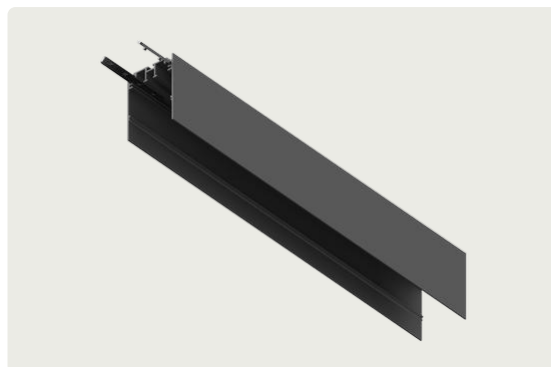

The figures on the drawing are expressed in mm.



Technical Data

Concept

Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules.

Mechanical characteristics

Extruded aluminum profile protected with a layer of black anodization with a minimum thickness of 15μ and powder painting in Ferrite grey color.

Colour and finish	Ferrite
Dimensions	AxBxH 2000x66x88mm
Weight	4Kg
Version	Surface

Notes

Linear connection joint already included in the packaging. Extruded plastic aesthetic cover available as accessory.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes

End Caps



CODE	COLOUR
1E4168	

End caps made of 2 pieces.
For surface mounted installation profile.


Accessories

Mechanical connector



CODE	COLOUR
1E4176	

L shaped joint planar.
For surface mounted installation profile.



CODE	COLOUR
1E4177	

L shaped joint concave.
For surface mounted installation profile.



CODE	COLOUR
1E4178	

L shaped joint convex.
For surface mounted installation profile.

Cover Panel



CODE	COLOUR	L
1E4170		2000mm

Extruded plastic cover.


Suspension



CODE	COLOUR	L
2T0049		2000mm

Suspension cable.
For indoor environment only.

Power Supply Kit



CODE	COLOUR	DRIVER	L
2T0048EL		ON-OFF	4000mm

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.



CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.