LIGHTING SYSTEMS


# Ivy Linear module



Code
**1E4141EL**


| LIGHT COLOUR | LIGHT DISTRIBUTION | OUTPUT |
|---|---|---|
| 3000K<br>90 | Wall Washer | 22.4W<br>2208lm |

| POWER SUPPLY CONTROL | COLOUR |
|---|---|
| 48Vdc | |

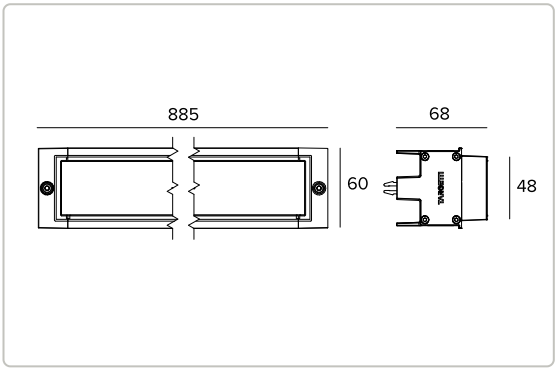


**The figures on the drawing are expressed in mm.**






| 3000K | | H(m) | D1(m) | D2(m) | Emax(lx) |
|---|---|---|---|---|---|
| Ra90 | | | 115° | 59° | |
| Fixture Power | 22W | 1 | 3.12 | 1.34 | 1974 |
| Source Flux | 2937lm | 2 | 6.23 | 2.67 | 494 |
| Fixture Flux | 2208lm | 3 | 9.35 | 4.01 | 219 |
| Efficacy | 99lm/W | 4 | 12.47 | 5.35 | 123 |
| Imax | 2272cd | 5 | 15.59 | 6.69 | 79 |

## Technical Data

### Concept

Linear LED light module, powered at low voltage, to be installed into the installation profile.

### Source

| | |
|---|---|
| High Power High Efficiency Ra90 linear LED board. | |
| Energy efficiency class | E |
| Nominal power | 20W |
| Nominal flux | 2937lm |
| Colour rendering index | 90 |
| Rf | 90.3 |
| Rg | 100.4 |
| CCT nominal | 3000K |
| SDCM | 3 |
| Lifetime (L80/B10) | 100000h tq +25°C |
| Lifetime (L90/B10) | 59000h tq +25°C |

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Illuminotechnical characteristics

Wall Washer version: internal optical system made of a primary cylindrical lens in PMMA, high reflectance specular reflector and integrated holographic diffusive filter.

| | |
|---|---|
| Optic | Wall Washer |
| Beam angles | WW |
| Optical efficiency | 75.19% |
| Fixture flux | 2208lm |
| Luminous efficacy | 99lm/W |
| Photobiological safety | Compliant with RG1 low risk group |

### Mechanical characteristics

Extruded aluminium body protected with a layer of black anodization with a minimum thickness of 15µ. Side enclosure caps in thermoplastic polymer. Extra clear 4mm thick glass flat screen. Lighting module of 885mm length.

| | |
|---|---|
| Colour and finish | Black anodized |
| Dimensions | AxBxH 885x60x68mm |
| Weight | 2.2Kg |
| Version | ON-OFF |
| Degree of protection | IP65 |

### Electrical characteristics

| | |
|---|---|
| Fixture Power | 22.4W |
| Power supply | 48Vdc |
| Insulation Class | CLASS 3 |
| Ambient temperature | -25°C / +35°C |

### Installation

Fast connection system of the modules through anodized aluminium clips. Free positining all over the installion profile according to installation needs with mechanical lock through Hex Key. Designed for connection in series through H05RN-F (0.15m + 0.15m) cable completed with female/female miniaturised IP65 connectors.

### Notes

Electronic ON-OFF version. Complete with male/male connection kit to allow light emission in both directions.

### Regulations and Certifications

CE

### Warranty

5 years.

### Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

## Related codes

### Power Supply




| CODE | COLOUR | DRIVER |
|---|---|---|
| 1E4169 | ● | ON-OFF |

48Vdc driver box (IP65).
L=450mm 90W.
Equipped with connection cable H05RN-F (0.15m + 0.15m) complete with male/female IP65 connectors for 220V and miniaturized female IP65 connector for 48V.



| CODE | COLOUR | DRIVER |
|---|---|---|
| 1E4175 | ● | ON-OFF |


48Vdc driver box (IP65).
L=450mm 150W.
Equipped with connection cable H05RN-F (0.15m + 0.15m) complete with male/female IP65 connectors for 220V and miniaturized female IP65 connector for 48V.



| CODE | IP | OUTPUT VOLTAGE | POWER SUPPLY | POWER | LXHXP |
|---|---|---|---|---|---|
| 1E2320 | IP67 | 48Vdc | 220-240Vac | 70W | 225x51x65mm |
| 1E2321 | IP67 | 48Vdc | 220-240Vac | 150W | 225x51x65mm |

Electronic ON-OFF power supply.
Cable length 0.5m (IN and OUT).

To be completed with Connection kit 1E4184.




| CODE | IP | OUTPUT VOLTAGE | POWER SUPPLY | POWER | LXHXP |
|---|---|---|---|---|---|
| 1T6917EL | IP20 | 48Vdc | 220-240Vac | 60W | 225x36x60mm |
| 1T6916EL | IP20 | 48Vdc | 220-240Vac | 130W | 240x49x60mm |

Electronic ON-OFF power supply.

To be completed with Connection kit 1E4184.

## Accessories

### Cable



| CODE | L |
|---|---|
| 1E4270 | 500mm |
| 1E4181 | 1000mm |
| 1E4182 | 2000mm |
| 1E4183 | 3000mm |

Connection cable complete with male/female connectors.

## Tool




**CODE**

**1E4171**

Microscrewdriver with hexagonal head (diameter 0.9mm) for wiring 1E4184 connection kit.

## Connector



**CODE**

**1E4184**

Connection kit 24/48V.

Wire not included.
Maximum cable diameter 7.5mm.
To be used for lengths >3m.



**CODE**

**1E2769**

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.