


WALL MOUNTED LUMINAIRES

Slim Wall - L. 1238mm

Code
1T4195

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 80	VWFL 117°	56W 5133lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac ON-OFF		

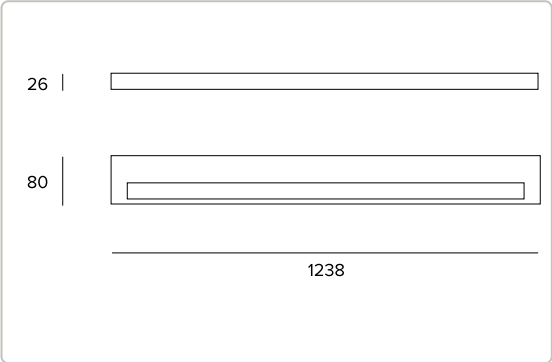

The figures on the drawing are expressed in mm.



Technical Data

Concept

Wall mounted fixture with direct/indirect light emission for LED sources.

Source

Linear Low Power High Efficiency LED board Ra80.

Energy efficiency class	D
Nominal power	48W
Nominal flux	6880lm
Colour rendering index	80
R _f	82.9
R _g	97
CCT nominal	3000K
SDCM	2
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data**Illuminotechnical characteristics**

Emission	Direct/Indirect
Optic	VWFL
Beam angles	VWFL
Optical efficiency	74.6%
Fixture flux	5133lm
Luminous efficacy	92lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Extruded anodised aluminium body Transparent polycarbonate upper safety screen. Ribbed, extruded opal polycarbonate lower diffusive screen. Polycarbonate lateral end caps.

Colour and finish	Aluminium
Dimensions	AxBxH 1238x80x26mm
Weight	2.2Kg
Degree of protection	IP20

Electrical characteristics

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	56W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	0°C / +25°C

Notes

Design Daniel Bernard.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.