


PROJECTORS

Dart Round Maxi TW

Code

1E4044DA

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
2700-5000K 80	FL 32°	33.2W 2069-2432lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac DALI DT8		

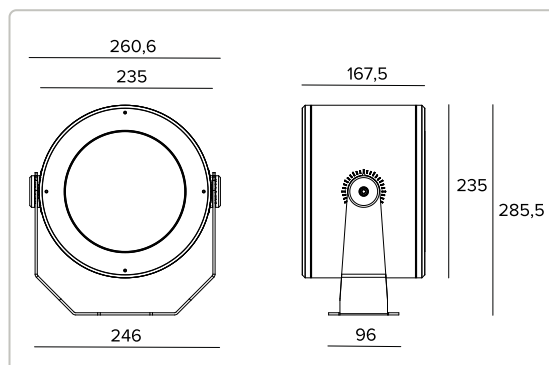

The figures on the drawing are expressed in mm.



The fixture's photometric values can be found on the following pages

Technical Data

Concept

Professional adjustable LED projector.

Source

Tunable White light module made of high power and high efficiency Ra80 LED sources. Color temperature adjustment range between 2700K and 5000K.

Energy efficiency class	F
Nominal power	28W
Nominal flux	See photometries
Colour rendering index	80
Rf	83
Rg	97
CCT nominal	See photometries

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Equipped with precision methacrylate lenses and spreader filter.

Optic	FL
Beam angles	FL
Optical efficiency	See photometries
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish	Ferrite
Dimensions	ØxH 235x168mm
Weight	6.6Kg
Degree of protection	IP66
Mechanical Resistance	IK10

Electrical characteristics

DALI DT8 driver integrated in the body of the fixture. All versions are precabled with a 1.5m long feeding cable H07RN-F. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	33.2W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	DALI DT8
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +35°C

Installation

Mounting bracket with aiming adjustability. Adjustable up to $\pm 45^\circ$ on the horizontal pane and $+90^\circ/-45^\circ$ on the vertical plane.

Notes

Casambi control system available using a dedicated accessory (only for DALI version products). Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^\circ\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).


We reserve the right to make technical changes.

Photometries


WW

CCT nominal	2700K		<table> <tr> <th>2700K</th> <th>H(m)</th> <th>D(m)</th> <th colspan="2">E_{max}(lx)</th> </tr> <tr> <th>Ra80</th> <td></td> <td>32°</td> <td colspan="2"></td> </tr> <tr> <td>Fixture Power</td> <td>33W</td> <td>1</td> <td>0.57</td> <td>5823</td> </tr> <tr> <td>Source Flux</td> <td>3075lm</td> <td>2</td> <td>1.14</td> <td>1456</td> </tr> <tr> <td>Fixture Flux</td> <td>2069lm</td> <td>3</td> <td>1.70</td> <td>647</td> </tr> <tr> <td>Luminous efficacy</td> <td>62lm/W</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Optical efficiency</td> <td>67.28%</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="2"></td> <td>TS1792</td> <td>I_{max}=1894cd/klm</td> <td>I_{max}</td> <td>5823cd</td> <td>5</td> <td>2.84</td> <td>233</td> </tr> </table>				2700K	H(m)	D(m)	E _{max} (lx)		Ra80		32°			Fixture Power	33W	1	0.57	5823	Source Flux	3075lm	2	1.14	1456	Fixture Flux	2069lm	3	1.70	647	Luminous efficacy	62lm/W					Optical efficiency	67.28%							TS1792	I _{max} =1894cd/klm	I _{max}	5823cd	5	2.84	233
2700K	H(m)		D(m)	E _{max} (lx)																																																
Ra80			32°																																																	
Fixture Power	33W		1	0.57	5823																																															
Source Flux	3075lm		2	1.14	1456																																															
Fixture Flux	2069lm	3	1.70	647																																																
Luminous efficacy	62lm/W																																																			
Optical efficiency	67.28%																																																			
		TS1792	I _{max} =1894cd/klm	I _{max}	5823cd	5	2.84	233																																												

NW

CCT nominal	3800K		<table> <tr> <th>3800K</th> <th>H(m)</th> <th>D(m)</th> <th colspan="2">E_{max}(lx)</th> </tr> <tr> <th>Ra80</th> <td></td> <td>32°</td> <td colspan="2"></td> </tr> <tr> <td>Fixture Power</td> <td>33W</td> <td>1</td> <td>0.57</td> <td>6771</td> </tr> <tr> <td>Source Flux</td> <td>3586lm</td> <td>2</td> <td>1.14</td> <td>1693</td> </tr> <tr> <td>Fixture Flux</td> <td>2432lm</td> <td>3</td> <td>1.72</td> <td>752</td> </tr> <tr> <td>Luminous efficacy</td> <td>73lm/W</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Optical efficiency</td> <td>67.82%</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="2"></td> <td>TS1792</td> <td>I_{max}=1888cd/klm</td> <td>I_{max}</td> <td>6771cd</td> <td>5</td> <td>2.86</td> <td>271</td> </tr> </table>				3800K	H(m)	D(m)	E _{max} (lx)		Ra80		32°			Fixture Power	33W	1	0.57	6771	Source Flux	3586lm	2	1.14	1693	Fixture Flux	2432lm	3	1.72	752	Luminous efficacy	73lm/W					Optical efficiency	67.82%							TS1792	I _{max} =1888cd/klm	I _{max}	6771cd	5	2.86	271
3800K	H(m)		D(m)	E _{max} (lx)																																																
Ra80			32°																																																	
Fixture Power	33W		1	0.57	6771																																															
Source Flux	3586lm		2	1.14	1693																																															
Fixture Flux	2432lm	3	1.72	752																																																
Luminous efficacy	73lm/W																																																			
Optical efficiency	67.82%																																																			
		TS1792	I _{max} =1888cd/klm	I _{max}	6771cd	5	2.86	271																																												

CW

CCT nominal	5000K		<table> <tr> <th>5000K</th> <th>H(m)</th> <th>D(m)</th> <th colspan="2">E_{max}(lx)</th> </tr> <tr> <th>Ra80</th> <td></td> <td>32°</td> <td colspan="2"></td> </tr> <tr> <td>Fixture Power</td> <td>33W</td> <td>1</td> <td>0.56</td> <td>6617</td> </tr> <tr> <td>Source Flux</td> <td>3443lm</td> <td>2</td> <td>1.13</td> <td>1654</td> </tr> <tr> <td>Fixture Flux</td> <td>2334lm</td> <td>3</td> <td>1.69</td> <td>735</td> </tr> <tr> <td>Luminous efficacy</td> <td>70lm/W</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Optical efficiency</td> <td>67.8%</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="2"></td> <td>TS1792</td> <td>I_{max}=1922cd/klm</td> <td>I_{max}</td> <td>6617cd</td> <td>5</td> <td>2.82</td> <td>265</td> </tr> </table>				5000K	H(m)	D(m)	E _{max} (lx)		Ra80		32°			Fixture Power	33W	1	0.56	6617	Source Flux	3443lm	2	1.13	1654	Fixture Flux	2334lm	3	1.69	735	Luminous efficacy	70lm/W					Optical efficiency	67.8%							TS1792	I _{max} =1922cd/klm	I _{max}	6617cd	5	2.82	265
5000K	H(m)		D(m)	E _{max} (lx)																																																
Ra80			32°																																																	
Fixture Power	33W		1	0.56	6617																																															
Source Flux	3443lm		2	1.13	1654																																															
Fixture Flux	2334lm	3	1.69	735																																																
Luminous efficacy	70lm/W																																																			
Optical efficiency	67.8%																																																			
		TS1792	I _{max} =1922cd/klm	I _{max}	6617cd	5	2.82	265																																												

Accessories

Filter



CODE	COLOUR
1E4010	



Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Grid



CODE	COLOUR
1E4013	



Anti-glare louver.
Powder coated stainless steel.

Screen



CODE	COLOUR
1E4011	




Asymmetric screen.
Powder coated stainless steel.



CODE	COLOUR
1E4012	



Cylindrical screen.
Powder coated stainless steel.
Short version.



CODE	COLOUR
1E4059	



Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



CODE	COLOUR
1E3026	



Plate for fixture rotation.
Powder coated stainless steel.



CODE	COLOUR	ØXH
1E3188		150x352mm



Earthspike.
Powder coated stainless steel.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Mounting System



CODE

COLOUR

1E2825



Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).




CODE

COLOUR

1E3097



Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.



CODE

COLOUR

1E3187



Pole with base.
Powder coated stainless steel.

Connector



CODE

1E2769

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.

Tool



CODE

1E3305

Tightening wrench for the connector kit.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Control systems



CODE

1E3048

IP67 wireless control unit with DALI interface.

It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.

The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.

The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.
LxHxP=108x28x65mm.



CODE

1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.


IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.
LxHxP=148x40x150mm.

Surge protector



CODE

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67

Accessories

Surge protector



CODE

A013C

Surge protector compatible with CLASS I lighting fixtures.
DALI, DMX, 0-10V datalines compliance.
Operating voltage 230Vac.
SPD type 2+3.
Max surge protection 10kV.
CLASS I
IP20