
TRACK PROJECTORS


Zeno 180 - HO

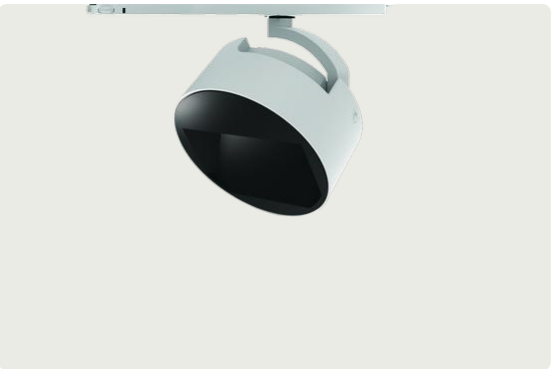

Code
T043WWR730ELPW


LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 97	Wall Washer	58.4W 2566lm

POWER SUPPLY CONTROL	COLOUR
220-240Vac ON-OFF	

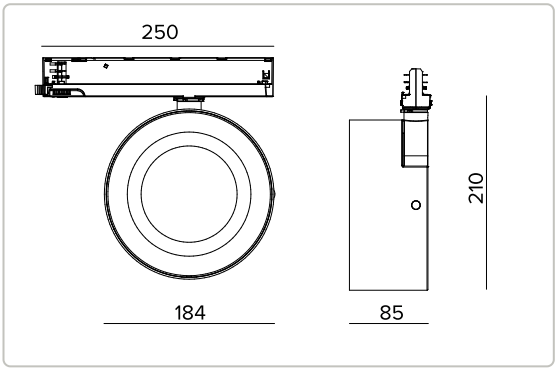

The figures on the drawing are expressed in mm.

1.4 IP20 CE



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra97			34°	82°	
Fixture Power	58W	1	0.98	2.02	1874
Source Flux	5318lm	2	1.96	4.04	468
Fixture Flux	2566lm	3	2.94	6.06	208
Efficacy	44lm/W	4	3.92	8.08	117
Imax	2767cd	5	4.91	10.10	75

Technical Data

Concept

Professional adjustable LED projector.

Source

High efficiency Chip on Board LED Ra97.	
Energy efficiency class	F
Nominal power	51W
Nominal flux	5318lm
Colour rendering index	97
Rf	95
Rg	103
CCT nominal	3000K
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Wall Washer version with a highly reflective pre-anodised specular aluminium optic, a PMMA holographic screen and a black polymer covering element.

Optic	Wall Washer
Beam angles	WW
Optical efficiency	48.26%
Fixture flux	2566lm
Luminous efficacy	44lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Die-cast painted aluminium optical unit. The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.

Colour and finish	Plaster white
Dimensions	ØxH 184x85mm
Weight	1.4Kg
Degree of protection	IP20

Electrical characteristics

ON-OFF electronic driver integrated into the track adapter.

Fixture Power	58.4W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 2
Type of driver / Control	ON-OFF
Driver included	YES
Ambient temperature	0°C / +25°C

Installation

Electrified track mounting.

Notes

110-277Vac version available on request.

Regulations and Certifications

CE

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.