

WALL RECESSED LUMINAIRES

SURFACE LUMINAIRES


BOLLARDS

Zedge Pro

Code

1E3216DA90

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 90	Floor Washer	15.6W 443-660lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac DALI		

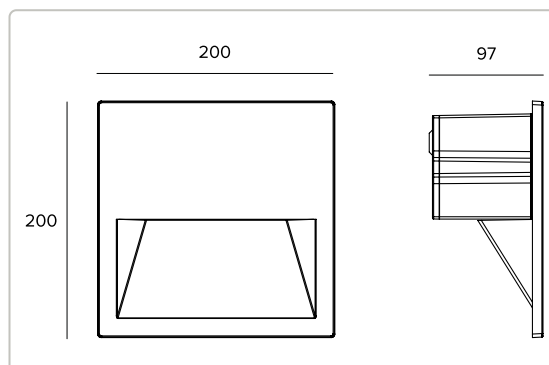

The figures on the drawing are expressed in mm.

The fixture's photometric values
can be found on the following pages



Technical Data

Concept

Recessed wall mounted LED fixture.

Source

2 high efficiency Ra90 LED Chip on Board.

Energy efficiency class	E
Nominal power	14W
Nominal flux	1926lm
Colour rendering index	90
Rf	90
Rg	98
CCT nominal	4000K
SDCM	2
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

The internal optical system is composed of 2 metallised polycarbonate reflectors coupled to two high reflectance anodised aluminium reflectors and holographic filters. Louver screen in silk-screen printed extra-clear glass. ADJUSTABLE version - that allows to change from one beam to the other in a uniform way by adjusting the 2 optical systems.

Optic	Floor Washer
Optical efficiency	See photometries
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group
BUG rating in compliance with IES TM 15 07	See photometries

Mechanical characteristics

The body of the fixture and the external frame are made of powder coated die-cast anodised aluminium.

Colour and finish	Ferrite
Dimensions	AxBxH 200x200x97mm
Weight	2.35Kg
Version	Adjustable
Degree of protection	IP66
Mechanical Resistance	IK10

Electrical characteristics

Complete with a dimmable DALI power supply. Pre-cabled with a 1m HO7RN-F (4x1mm²) cable. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	15.6W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 2
Type of driver / Control	DALI - PUSH
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +35°C

Installation

To be completed with a special nylon outer casing fitted for parallel connection.

Notes

Designed in collaboration with Gensler. Casambi control system available using a dedicated accessory. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com


Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^{\circ}\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Photometries

DEEP NW


Fixture flux	660lm
Luminous efficacy	42lm/W
Optical efficiency	34.27%
BUG rating in compliance with IES TM 15 07	B=1 U=0 G=0



4000K	H(m)	D1(m)	D2(m)	Emax(lx)			
Ra90	44°	53°					
Fixture Power	16W	1	2.06	1.38	524		
Source Flux	1926lm	2	4.11	2.77	131		
Fixture Flux	660lm	3	6.17	4.15	58		
Efficacy	42lm/W	4	8.23	5.53	33		
TS1076	Imax=489cd/klm	Imax	942cd	5	10.29	6.92	21

WIDE NW


Fixture flux	443lm
Luminous efficacy	28lm/W
Optical efficiency	22.98%
BUG rating in compliance with IES TM 15 07	B=0 U=0 G=0



4000K	H(m)	D1(m)	D2(m)	Emax(lx)			
Ra90	32°	105°					
Fixture Power	16W	1	0.82	2.79	312		
Source Flux	1926lm	2	1.63	5.58	78		
Fixture Flux	443lm	3	2.45	8.38	35		
Efficacy	28lm/W	4	3.27	11.17	19		
TS1077	Imax=239cd/klm	Imax	461cd	5	4.09	13.96	12

Related codes

Insertion Box




CODE

1E3219

Nylon outer casing fitted for parallel connection with feed through-wiring.
 AxBxH=207x207x114.5mm.
 For flush or overlay installation.

Carter



CODE


1E3440

COLOUR



Plate accessory for wall mounted installation.
 Powder coated anodised aluminium.
 AxBxH=201x201x107mm.

Bollard



CODE

1E3437

COLOUR



H

400mm

KG

3.5Kg

1E3438



800mm

5.8Kg

1E3439



1000mm

7Kg

Powder coated anodised aluminium bollard.

Mounting System



CODE

1E3450

Fixing rods for installation in concrete.
 AISI 316 stainless steel.
 H=147mm.
 0.36Kg.

For Zedge Pro Bollard installation with pole 1E3437, 1E3438, 1E3439.

Accessories

Connector



CODE

1E2769

Linear connection box IP66/IP68.
 5 poles max. wire section 1.5mm².
 Cable diameter range from 7 to 12mm.



CODE

1E2494

Multiple connection box IP68.
 1 IN - 3 OUT 4 poles max. wire section 2.5mm².
 Cable diameter range from 6 to 12mm.

TARGETTI

CCIAA Firenze
 Share Capital: € 500.000,00
 VAT N. (IT): 01537660480
 R.E.A: FI-275656

Targetti Sankey S.r.l.
 Via Giuseppe Garibaldi, 82
 50041 Calenzano (FI)
 Italy

Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Tool



CODE

1E3305

Tightening wrench for the connector kit.

Control systems



CODE

1E3048

IP67 wireless control unit with DALI interface.

It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.

The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.

The control unit is preset to the DALI TCH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.

LxHxP=108x28x65mm.



CODE

1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.


In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.

LxHxP=148x40x150mm.

Surge protector



CODE

A013B

Surge protector compatible with CLASS II lighting fixtures and electronic drivers.

Operating voltage 220-240Vac.

SPD type 2+3.

Max surge protection 10kV.


CLASS II

IP67

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories**Surge protector****CODE****A013D**

Surge protector compatible with CLASS II lighting fixtures.
DALI, DMX, 0-10V datalines compliance.
Operating voltage 230-277Vac.
SPD type 2+3.
Max surge protection 10kV.
CLASS II
IP65