LIGHTING SYSTEMS


Oz Lighting module - Single adjustable - 50x50mm

Code
1T7417CA




LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3500K 90	MWFL 37°	7.1W 840lm

POWER SUPPLY CONTROL	COLOUR
48Vdc	

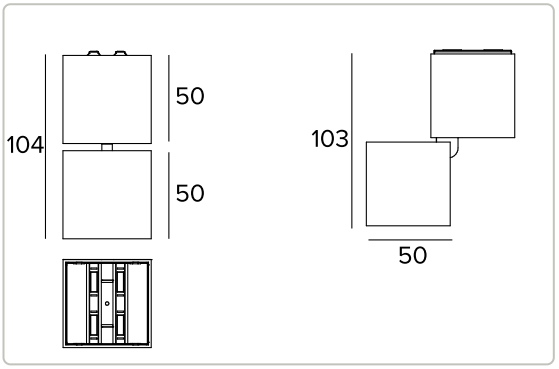

The figures on the drawing are expressed in mm.





3500K		H(m)	D(m)	Emax(lx)
Ra90			37°	
Fixture Power	7W	1	0.66	1932
Source Flux	1019lm	2	1.32	483
Fixture Flux	840lm	3	1.98	215
Efficacy	118lm/W	4	2.64	121
TS1127 Imax=1896cd/klm	Imax 1932cd	5	3.31	77

Technical Data

Concept

Adjustable magnetic LED light module, powered at low voltage.

Source

High efficiency Chip on Board LED Ra90.	
Energy efficiency class	E
Nominal power	6,5W
Nominal flux	1019lm
Colour rendering index	90
Rf	91
Rg	100
CCT nominal	3500K
SDCM	2
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Convex faceted anodised mirror finish aluminium, medium wide flood precision optic, a holographic diffuser filter and a black polycarbonate frame. The light is suitable for installation in work environments UGR<19 (EN12464-1).

Optic	MWFL
Beam angles	MWFL
Optical efficiency	82.4%
Fixture flux	840lm
Luminous efficacy	118lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

White painted die-cast aluminium body. Adjustable fixture, 50x50mm. Tiltability of the optical unit from 0° to +90° on the vertical plane and of 358° on the horizontal plane.

Colour and finish	Plaster white
Dimensions	AxBxH 50x50x104mm
Weight	0.2Kg
Version	Adjustable - CASAMBI
Degree of protection	IP20

Electrical characteristics

Fixture Power	7.1W
Power supply	48Vdc
Insulation Class	CLASS 3
Ambient temperature	0°C / +25°C

Installation

Extremely rapid, versatile and simple mechanical and electrical coupling system using magnets which support the fixture on the Power Track and feed power inside the fixture on all versions.

Notes

Integrated Casambi control system (Casambi Ready). DALI control system available using a special accessory. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Regulations and Certifications

CE

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.