
LIGHTING SYSTEMS

# Oz Ceiling/Suspension installation profile - Small

**Code**
**1T7055**



COLOUR

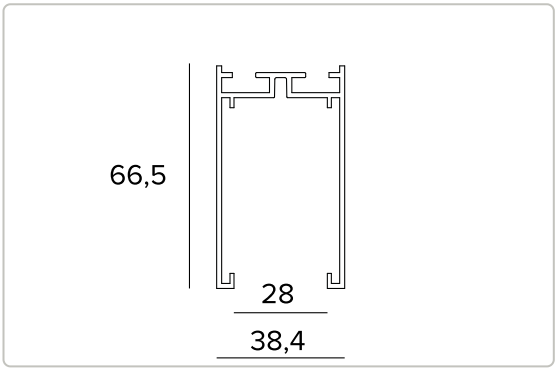


**The figures on the drawing are expressed in mm.**

2.61 CE

## Technical Data

### Concept

Ceiling/suspension installation profile for 25x25mm light modules.

### Mechanical characteristics

Extruded painted aluminium profile. Head module.

| | |
|---|---|
| Colour and finish | Deep black |
| Dimensions | AxBxH 3015x39x67mm |
| Weight | 2.61Kg |
| Version | For 25x25mm light modules - Head module |

### Installation

For stand-alone installation only used head modules. For system installation it is necessary to start the configuration with a head module. For closed configurations it is necessary to order a minimum of two head modules or multiples of two to install back to back.

### Notes

To be completed with Power Track.

### Regulations and Certifications

CE

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Warranty

5 years.

### Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Related codes


### End Caps



| CODE | COLOUR |
|---|---|
| 1T7063 | ● |


Kit containing 2 profile end caps.
For small ceiling/suspension mounted profiles.

### Mounting System



| CODE |
|---|
| 1T7065 |

Ceiling installation kit.
2 pieces to be ordered for 1m long modules, 2 pieces for 2m long modules and 3 pieces for 3m long modules.




| CODE |
|---|
| 1T7066 |

Suspension installation kit.
L=2000mm.
2 pieces to be ordered for 1m long modules, 2 pieces for 2m long modules and 3 pieces for 3m long modules.


## Accessories

### Mechanical connector




| CODE | COLOUR |
|---|---|
| 1T7059 | ● |

Mechanical L connector.
For small ceiling/suspension mounted profiles.




| CODE | COLOUR |
|---|---|
| 1T7060 | ● |

Mechanical T connector.
For small ceiling/suspension mounted profiles.



| CODE | COLOUR |
|---|---|
| 1T7061 | ● |

Mechanical X connector.
For small ceiling/suspension mounted profiles.



| CODE | COLOUR |
|---|---|
| 1T7097 | ● |

Linear mechanical joint, made of 4 mechanical joints and 4 screws.
For ceiling/suspension installation profile.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Cover Panel



| CODE | COLOUR | L |
|---|---|---|
| 1T9597 | ● | 1000mm |
| 1T9598 | ● | 2000mm |

Cover for small profiles for ceiling/suspension installation.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.