WALL MOUNTED LUMINAIRES


Zeno 180 Applique



Code
T038WWR740ELPW


LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 97	Wall Washer	58.4W 2734lm

POWER SUPPLY CONTROL	COLOUR
220-240Vac ON-OFF	

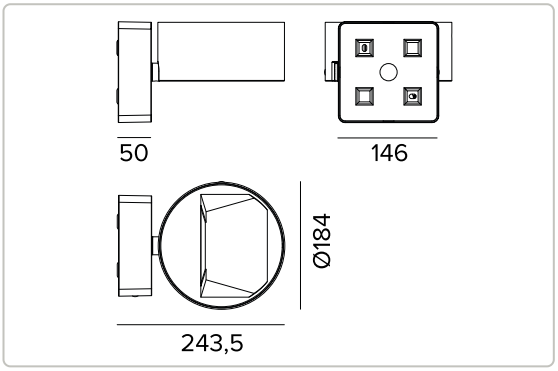

The figures on the drawing are expressed in mm.

1.7 IP40 CE



4000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra97			34°	80°	
Fixture Power	58W	1	0.98	1.98	1994
Source Flux	5666lm	2	1.96	3.97	499
Fixture Flux	2734lm	3	2.94	5.95	222
Efficacy	47lm/W	4	3.92	7.94	125
Imax	2948cd	5	4.91	9.92	80

Technical Data

Concept

Professional LED projector.

Source

High efficiency Chip on Board LED Ra97.	
Energy efficiency class	E
Nominal power	51W
Nominal flux	5666lm
Colour rendering index	97
Rf	92
Rg	102
CCT nominal	4000K
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

A highly reflective specular pre-anodised aluminium Wall Washer optical system, a holographic PMMA screen and a black polymer covering element.

Emission	Indirect
Optic	Wall Washer
Beam angles	WW
Optical efficiency	48.26%
Fixture flux	2734lm
Luminous efficacy	47lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Die-cast painted aluminium optical unit and power supply box. The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.

Colour and finish	Plaster white
Dimensions	ØxH 184x85mm
Weight	1.7Kg
Degree of protection	IP40

Electrical characteristics

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	58.4W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF
Driver included	YES
Ambient temperature	0°C / +25°C

Installation

Steel plate for wall installation.

Notes

110-277Vac version available on request.

Regulations and Certifications

CE

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.