

PENDANT LUMINAIRES

WALL MOUNTED LUMINAIRES


Omega Applique - L. 792mm

Code
1T9520EL

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 90	Opal	28W 1620lm

POWER SUPPLY CONTROL COLOUR

220-240Vac
ON-OFF

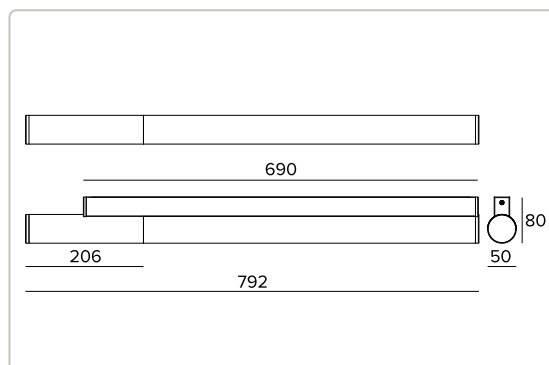

The figures on the drawing are expressed in mm.



	3000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		126°			
	Fixture Power	28W	1	3.90	361	
	Source Flux	2876lm	2	7.80	90	
	Fixture Flux	1620lm	3	11.70	40	
	Efficacy	58lm/W	4	15.60	23	
	TS1379	I _{max} =126cd/klm	I _{max}	361cd	5	19.50

Technical Data

Concept

Stand alone linear LED fixture for wall installation.

Source

LED Engine made of linear LED boards Ra90.

Energy efficiency class	E
Nominal power	23W
Nominal flux	2876lm
Colour rendering index	90
R _f	91.4
R _g	100.8
CCT nominal	3000K
SDCM	3
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Optical unit composed of an opal polycarbonate diffuser. Available in a direct emission version.

Optic	Opal
Optical efficiency	56.32%
Fixture flux	1620lm
Luminous efficacy	58lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted extruded aluminium body and painted aluminium optical unit and terminal. Opal polycarbonate screen.

Colour and finish	Ferrite
Dimensions	AxBxH 792x50x80mm
Weight	1.03Kg
Version	Wall
Degree of protection	IP20

Electrical characteristics

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	28W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	0°C / +25°C

Installation

Versions for wall installation L=792mm with installation kit supplied with the product.

Notes

Designed in collaboration with Gensler. 110-277Vac version available on request.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.