


LIGHTING SYSTEMS

Fortyeight Label 4 -
Fix

Code
1T9864DA

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
2700K 90	SP 18°	7.5W 533lm
POWER SUPPLY CONTROL	COLOUR	
48Vdc		

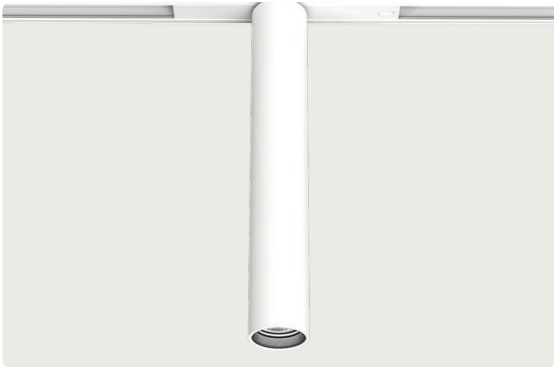

The figures on the drawing are expressed in mm.



Technical Data

Illuminotechnical characteristics

SP Version - metallised polycarbonate precision optics, a holographic diffusion filter and a black silicone cut off ring.

Optic	SP
Beam angles	SP
Optical efficiency	63.31%
Fixture flux	533lm
Luminous efficacy	71lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Cylindrical body in CNC machined aluminum and coated with powder paint.

Colour and finish	Plaster white
Dimensions	ØxH 43x270mm
Weight	0.3Kg
Version	DALI
Degree of protection	IP20

Electrical characteristics

DALI version, track power supply. Casambi control system available using a dedicated accessory.

Fixture Power	7.5W
Power supply	48Vdc
Insulation Class	CLASS 3
Ambient temperature	0°C / +25°C