


TRACK PROJECTORS

Ray 75 Zoom SMART

Code

T036ZMS930DAPW

| LIGHT COLOUR         | LIGHT DISTRIBUTION                                                                | OUTPUT               |
|----------------------|-----------------------------------------------------------------------------------|----------------------|
| 3000K<br>90          | Zoom Smart<br>17°-50°                                                             | 19.5W<br>1206-1266lm |
| POWER SUPPLY CONTROL | COLOUR                                                                            |                      |
| 220-240Vac<br>DALI   |  |                      |

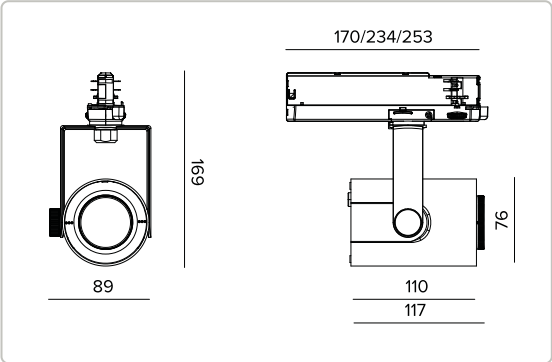

The figures on the drawing are expressed in mm.



The fixture's photometric values  
can be found on the following pages

Technical Data

Concept

Professional adjustable LED projector with a variable light beam opening.

Source

High efficiency Chip on Board LED Ra90. Ra97 on request.

|                         |                 |
|-------------------------|-----------------|
| Energy efficiency class | F               |
| Nominal power           | 17W             |
| Nominal flux            | 1759lm          |
| Colour rendering index  | 90              |
| Rf                      | 92              |
| Rg                      | 101             |
| CCT nominal             | 3000K           |
| Lifetime (L80/B10)      | 52000h tq +25°C |
| Lifetime (L90/B10)      | 52000h tq +25°C |

TARGETTI

CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656

Targetti Sankey S.r.l.  
Via Giuseppe Garibaldi, 82  
50041 Calenzano (FI)  
Italy

Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Illuminotechnical characteristics

ZOOM SMART version: optic composed of two PMMA elements working together, a fixed TIR primary lens and a secondary adjustable one. Rotation of the second lens of just 14° covers the zoom range between minimum and maximum opening.

|                        |                                   |
|------------------------|-----------------------------------|
| Optic                  | Zoom Smart                        |
| Beam angles            | SP-MWFL                           |
| Optical efficiency     | See photometries                  |
| Fixture flux           | See photometries                  |
| Luminous efficacy      | See photometries                  |
| Photobiological safety | Compliant with RG1 low risk group |

### Mechanical characteristics

Painted die-cast aluminium body. Black painted polycarbonate front ring. Adjustable from 0° to -90° on the vertical plane and 359° on the horizontal plane. Mechanical beam locking system on the vertical plane and friction beam locking system on the horizontal plane. The centre of gravity always remains in axis with the track regardless of the aiming.

|                      |               |
|----------------------|---------------|
| Colour and finish    | Plaster white |
| Dimensions           | ØxH 76x117mm  |
| Weight               | 0.53Kg        |
| Degree of protection | IP20          |

### Electrical characteristics

DALI electronic driver integrated into the track adapter.

|                          |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| Fixture Power            | 19.5W                                                                                                |
| Power supply             | 220-240Vac 50/60Hz                                                                                   |
| Insulation Class         | CLASS 2                                                                                              |
| Type of driver / Control | DALI                                                                                                 |
| Driver included          | YES                                                                                                  |
| SAFE FLICKER             | PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light |
| Ambient temperature      | 0°C / +25°C                                                                                          |

### Installation

Electrified track mounting.

### Notes

110-277Vac version available on request.

### Warranty

5 years.

### Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

# TARGETTI

CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656

Targetti Sankey S.r.l.  
Via Giuseppe Garibaldi, 82  
50041 Calenzano (FI)  
Italy

Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

SP

|                                                                                    |                              |                  |         |      |                       |       |
|------------------------------------------------------------------------------------|------------------------------|------------------|---------|------|-----------------------|-------|
|  |                              | 3000K            | H(m)    | D(m) | E <sub>max</sub> (lx) |       |
|                                                                                    |                              | Ra90             |         | 17°  |                       |       |
|                                                                                    |                              | Fixture Power    | 20W     | 1    | 0.29                  | 10464 |
|                                                                                    |                              | Source Flux      | 1759lm  | 2    | 0.58                  | 2616  |
|                                                                                    |                              | Fixture Flux     | 1266lm  | 3    | 0.88                  | 1163  |
|                                                                                    |                              | Efficacy         | 65lm/W  | 4    | 1.17                  | 654   |
| TS1931                                                                             | I <sub>max</sub> =5949cd/klm | I <sub>max</sub> | 10464cd | 5    | 1.46                  | 419   |

|        |                              |                  |        |          |      |    |
|--------|------------------------------|------------------|--------|----------|------|----|
|        | 3000K                        | H(m)             | D(m)   | Emax(lx) |      |    |
|        | Ra90                         | 50°              |        |          |      |    |
|        | Fixture Power                | 20W              | 1      | 0.93     | 1779 |    |
|        | Source Flux                  | 1759lm           | 2      | 1.85     | 445  |    |
|        | Fixture Flux                 | 1206lm           | 3      | 2.78     | 198  |    |
|        | Efficacy                     | 62lm/W           | 4      | 3.71     | 111  |    |
| TS1930 | I <sub>max</sub> =1011cd/klm | I <sub>max</sub> | 1779cd | 5        | 4.63 | 71 |