


LIGHTING SYSTEMS

Oz Recessed profile - Small

Code
1T7033

COLOUR

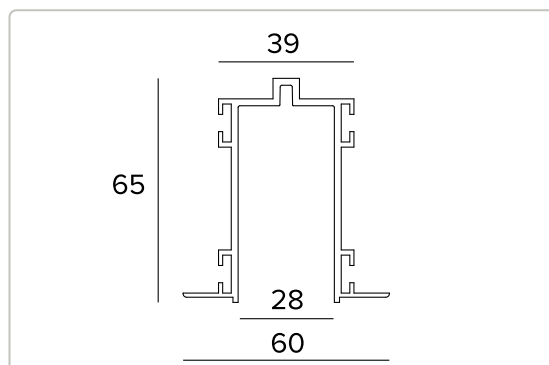

The figures on the drawing are expressed in mm.



Technical Data

Concept

Recessed profile for 25x25mm light modules.

Mechanical characteristics

Extruded painted aluminium profile.

Colour and finish	Plaster white
Dimensions	AxBxH 3000x60x65mm
Weight	3.34Kg
Version	For 25x25mm light modules

Installation

For trimless installation or with a flange.

Notes

To be completed with Power Track.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes

Mounting System




CODE

1T7043

Steel bracket for recessed installation of the small profile.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.

End Caps



CODE

1T7039


COLOUR



Kit containing 2 profile end caps.
For small recessed profiles.

Accessories


Mechanical connector



CODE

1T7041

Kit composed of 2 mechanical linear joints and 4 thrust screws.
For trimless installation profile.



CODE

1T7037

COLOUR



Mechanical L connector.
For small recessed profiles.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.