


WALL MOUNTED LUMINAIRES

Zeno 130 Applique

Code
TO4OWWR940ELDB

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 90	Wall Washer	29.5W 1869lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac ON-OFF		

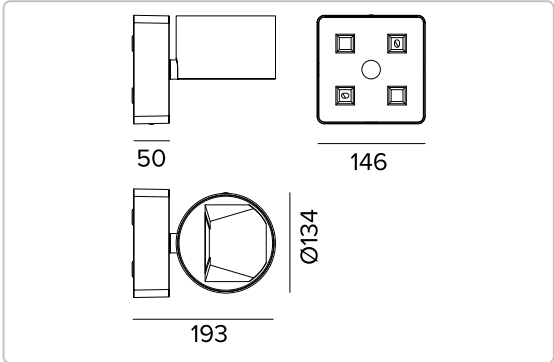

The figures on the drawing are expressed in mm.



Technical Data

Concept

Professional LED projector.

Source

High efficiency Chip on Board LED Ra90. Ra97 on request.

Energy efficiency class	E
Nominal power	26W
Nominal flux	3302lm
Colour rendering index	90
R _f	90
R _g	98
CCT nominal	4000K
SDCM	2
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).
We reserve the right to make technical changes.

Technical Data**Illuminotechnical characteristics**

A highly reflective specular pre-anodised aluminium Wall Washer optical system, a holographic PMMA screen and a black polymer covering element.

Emission	Indirect
Optic	Wall Washer
Beam angles	WW
Optical efficiency	56.59%
Fixture flux	1869lm
Luminous efficacy	63lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Die-cast painted aluminium optical unit and power supply box. The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.

Colour and finish	Deep black
Dimensions	ØxH 134x85mm
Weight	0.85Kg
Degree of protection	IP40

Electrical characteristics

Integrated electronic power supply.

Fixture Power	29.5W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	0°C / +25°C

Installation

Steel plate for wall installation.

Notes

110-277Vac version available on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.