IN-GROUND LUMINAIRES


# Keplero 280 Zoom



Code
## E013ZMH840ELCCB

| LIGHT COLOUR | LIGHT DISTRIBUTION | OUTPUT |
|---|---|---|
| 4000K<br>80 | Multioptic Zoom<br>19°, 26°, 43°, 64° | 34.9W<br>1823-3162lm |

| POWER SUPPLY CONTROL | COLOUR |
|---|---|
| 220-240Vac<br>ON-OFF | |

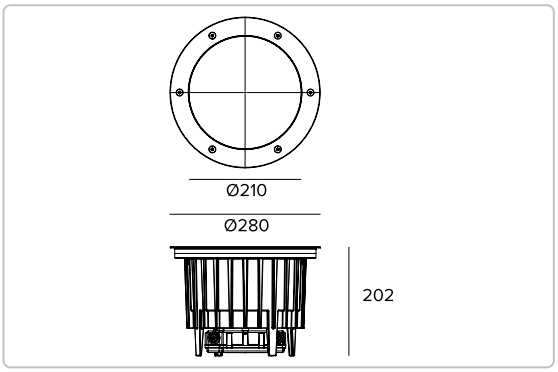


The figures on the drawing are expressed in mm.

5.25 IP66 IP67 IP68 IK10 CE

The fixture's photometric values can be found on the following pages

## Technical Data

### Concept

Adjustable recessed professional projector equipped with LED sources and variable beam openings.

### Source

| High efficiency Chip on Board LED Ra80. 3500K colour temperature available on request. | |
|---|---|
| Energy efficiency class | D |
| Nominal power | 30W |
| Nominal flux | 4979lm |
| Colour rendering index | 80 |
| Rf | 82 |
| Rg | 95 |
| CCT nominal | 4000K |
| Lifetime (L80/B10) | 72000h tq +25°C |
| Lifetime (L90/B10) | 72000h tq +25°C |

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Illuminotechnical characteristics

A patented hybrid lens/reflector Zoom optical system with the possibility of sliding and locking on the vertical axis in four positions for as many beam openings. Beam adjustability up to 20° on the vertical plane and 360° on the horizontal plane obtained by rototranslation of the optical group, with double aim locking system. Optic group pre-set for the installation of one or more dedicated optical accessories to be ordered separately.

| | |
|---|---|
| Optic | Multioptic Zoom |
| Beam angles | SP, FL, MWFL, WFL |
| Optical efficiency | See photometries |
| Fixture flux | See photometries |
| Luminous efficacy | See photometries |
| Photobiological safety | Compliant with RG1 low risk group |

### Mechanical characteristics

Die-cast aluminium body with 3 layers of protection: anodised, cataphoresis and black paint. Brushed stainless steel (AISI 316) ultra flat decorative ring with bevelled edge (copper bronze finish). Version with extra-clear protective glass. Anti theft stainless steel A4 Torx screws.

| | |
|---|---|
| Colour and finish | Copper bronze |
| Dimensions | ØxH 280x202mm |
| Weight | 5.25Kg |
| Version | Extra-clear glass |
| Degree of protection | IP66,IP67,IP68 |
| Mechanical Resistance | IK10 |

### Electrical characteristics

Integrated IP68 ON-OFF electronic power supply equipped with IP68 waterproof connectors set for connection to the mains with a H07RN8-F (max2x2.5mm²) cable. Fixture with a pass-through line.

| | |
|---|---|
| Fixture Power | 34.9W |
| Power supply | 220-240Vac 50/60Hz |
| Insulation Class | CLASS 2 |
| Type of driver / Control | ON-OFF |
| Driver included | YES |
| SAFE FLICKER | PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light |
| Ambient temperature | -25°C / +35°C |

### Installation

Nylon installation sleeve to be ordered separately as an accessory. The sleeve is pre-set for both flush or straight edge installation. 20kN resistance to static load.

### Notes

All light fixtures must be completed with an installation sleeve. IP68: the projector is not suitable for permanent underwater installation but can withstand temporary accidental immersion to a depth of 2 metres (max.24h). All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass make them suitable even for installation in "special areas", such as spaces for children. Uses the "Waterblock Plus" technical solution that involves resin coating the connection cables and completely resin coating the integrated driver limiting the risk of humidity reaching the fixture. 110-277Vac version available on request.

## Technical Data

### Regulations and Certifications

CE

### Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com


Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

# Photometries

## SP


| | |
|---|---|
| **Fixture flux** | 1823lm |
| **Luminous efficacy** | 52lm/W |
| **Optical efficiency** | 36.62% |




| 4000K | | H(m) | D(m) | Emax(lx) |
|---|---|---|---|---|
| Ra80 | | | 19° | |
| Fixture Power | 35W | 1 | 0.34 | 12540 |
| Source Flux | 4979lm | 2 | 0.67 | 3135 |
| Fixture Flux | 1823lm | 3 | 1.01 | 1393 |
| Efficacy | 52lm/W | 4 | 1.34 | 784 |
| TS782 Imax=2519cd/klm | Imax 12540cd | 5 | 1.68 | 502 |

## FL


| | |
|---|---|
| **Fixture flux** | 2413lm |
| **Luminous efficacy** | 69lm/W |
| **Optical efficiency** | 48.46% |




| 4000K | | H(m) | D(m) | Emax(lx) |
|---|---|---|---|---|
| Ra80 | | | 26° | |
| Fixture Power | 35W | 1 | 0.46 | 8687 |
| Source Flux | 4979lm | 2 | 0.93 | 2172 |
| Fixture Flux | 2413lm | 3 | 1.39 | 965 |
| Efficacy | 69lm/W | 4 | 1.86 | 543 |
| TS781 Imax=1745cd/klm | Imax 8687cd | 5 | 2.32 | 347 |

## MWFL


| | |
|---|---|
| **Fixture flux** | 3015lm |
| **Luminous efficacy** | 86lm/W |
| **Optical efficiency** | 60.55% |




| 4000K | | H(m) | D(m) | Emax(lx) |
|---|---|---|---|---|
| Ra80 | | | 43° | |
| Fixture Power | 35W | 1 | 0.78 | 5011 |
| Source Flux | 4979lm | 2 | 1.56 | 1253 |
| Fixture Flux | 3015lm | 3 | 2.34 | 557 |
| Efficacy | 86lm/W | 4 | 3.12 | 313 |
| TS780 Imax=1006cd/klm | Imax 5011cd | 5 | 3.90 | 200 |

## WFL

| | |
|---|---|
| **Fixture flux** | 3162lm |
| **Luminous efficacy** | 91lm/W |
| **Optical efficiency** | 63.5% |




| 4000K | | H(m) | D(m) | Emax(lx) |
|---|---|---|---|---|
| Ra80 | | | 64° | |
| Fixture Power | 35W | 1 | 1.25 | 2981 |
| Source Flux | 4979lm | 2 | 2.50 | 745 |
| Fixture Flux | 3162lm | 3 | 3.75 | 331 |
| Efficacy | 91lm/W | 4 | 5.00 | 186 |
| TS779 Imax=599cd/klm | Imax 2981cd | 5 | 6.25 | 119 |



Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Related codes

### Sleeve



| CODE |
| --- |
| 1E2394 |

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

## Accessories

### Filter



| CODE | Ø |
| --- | --- |
| 1T1696 | 101mm |

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.


### Grid



| CODE | Ø |
| --- | --- |
| 1T1699 | 101mm |

Anti-glare louver.
Black painted metal honeycomb structure.

### Shutter



| CODE | COLOUR |
| --- | --- |
| 1E2402 | ● |

Half-moon shutter.

### Tool



| CODE |
| --- |
| 1E2496 |

Metal handle for fixture removal



| CODE |
| --- |
| 1E2495 |

Features TORX HEAD, TX 30.



Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.



**CODE**

**1E0388**

Sucker tool to raise the glass.

## Connector



**CODE**

**1E2769**

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.




**CODE**

**1E2494**

Multiple connection box IP68.
1 IN - 3 OUT 4 poles max. wire section 2.5mm².
Cable diameter range from 6 to 12mm.

## Surge protector



**CODE**

**A013B**

Surge protector compatible with CLASS II lighting fixtures and electronic drivers.
Operating voltage 220-240Vac.
SPD type 2+3.
Max surge protection 10kV.
CLASS II
IP67

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.