

LIGHTING SYSTEMS

Oz Ceiling/Suspension installation profile - Small

Code
1T7045

COLOUR



Technical Data

Concept

Ceiling/suspension installation profile for 25x25mm light modules.

Mechanical characteristics

Extruded painted aluminium profile. Central/end module.

Colour and finish Plaster white

Dimensions AxBxH 2000x39x67mm

Weight 1.73Kg

Version For 25x25mm light modules - Central/end module

Installation


For stand-alone installation only used head modules. For system installation it is necessary to start the configuration with a head module. For closed configurations it is necessary to order a minimum of two head modules or multiples of two to install back to back.

Notes

To be completed with Power Track.

Warranty

5 years.

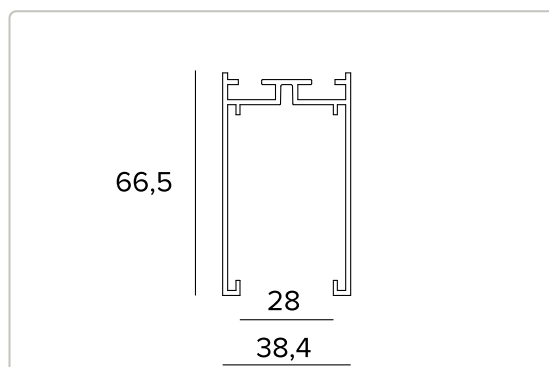

The figures on the drawing are expressed in mm.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data**Warning**

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes

End Caps




CODE	COLOUR
------	--------

1T7062	○
--------	---

Kit containing 2 profile end caps.
For small ceiling/suspension mounted profiles.


Mounting System



CODE

1T7065

Ceiling installation kit.
2 pieces to be ordered for 1m long modules, 2 pieces for 2m long modules and 3 pieces for 3m long modules.




CODE

1T7066

Suspension installation kit.
L=2000mm.
2 pieces to be ordered for 1m long modules, 2 pieces for 2m long modules and 3 pieces for 3m long modules.

Accessories


Mechanical connector



CODE	COLOUR
------	--------

1T7056	○
--------	---


Mechanical L connector.
For small ceiling/suspension mounted profiles.



CODE	COLOUR
------	--------

1T7057	○
--------	---


Mechanical T connector.
For small ceiling/suspension mounted profiles.



CODE	COLOUR
------	--------

1T7058	○
--------	---

Mechanical X connector.
For small ceiling/suspension mounted profiles.



CODE	COLOUR
------	--------

1T7064	○
--------	---

Linear mechanical joint, made of 4 mechanical joints and 4 screws.
For ceiling/suspension installation profile.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A.: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Cover Panel



CODE	COLOUR	L
1T9595	○	1000mm
1T9596	○	2000mm

Cover for small profiles for ceiling/suspension installation.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.