


PROJECTORS

Dart Round Maxi RGBW

Code
1E4062

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
RGBW	NSP 10°	49.8W 2333lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac DMX RDM		

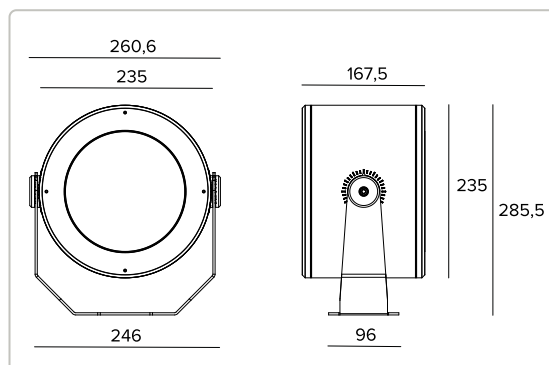

The figures on the drawing are expressed in mm.

The fixture's photometric values
can be found on the following pages



Technical Data

Concept

Professional adjustable LED projector.

Source

RGBW light module made of RGBW LED multichip. Color temperature of the white source: 6500K.

Energy efficiency class	F
Nominal power	45W
Nominal flux	See photometries
Colour rendering index	See photometries
CCT nominal	See photometries

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Equipped with precision methacrylate lenses.

Optic	NSP
Beam angles	NSP
Optical efficiency	84.75%
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish	Ferrite
Dimensions	ØxH 235x168mm
Weight	6.6Kg
Degree of protection	IP66
Mechanical Resistance	IK10

Electrical characteristics

Electronic DMX-RDM driver integrated in the body of the fixture with 4 independent constant current outputs. Controlled using DMX-RDM protocols that make it possible to programme the fixture remotely (no dip-switch) using the DMX data line. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory. All versions are pre-wired with a 1.5m long cable for power supply and DMX signal. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	See photometries
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	DMX RDM
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +35°C

Installation

Mounting bracket with aiming adjustability. Adjustable up to $\pm 45^\circ$ on the horizontal pane and $+90^\circ/-45^\circ$ on the vertical plane.

Notes

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Photometrics show the maximum emission values of fixtures. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^\circ\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Photometries

RGBW	Fixture Power	49.8W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>50W</td><td>1</td><td>0.17</td><td>63280</td></tr><tr><td>Source Flux</td><td>2753lm</td><td>2</td><td>0.34</td><td>15820</td></tr><tr><td>Fixture Flux</td><td>2333lm</td><td>3</td><td>0.51</td><td>7031</td></tr><tr><td>Efficacy</td><td>47lm/W</td><td>4</td><td>0.68</td><td>3955</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>63280cd</td><td>5</td><td>0.85</td><td>2531</td></tr></table>					-	H(m)	D(m)	Emax(lx)		-	-	10°			Fixture Power	50W	1	0.17	63280	Source Flux	2753lm	2	0.34	15820	Fixture Flux	2333lm	3	0.51	7031	Efficacy	47lm/W	4	0.68	3955	TS1783	Imax=22986cd/klm	Imax	63280cd	5	0.85	2531
	-	H(m)		D(m)	Emax(lx)																																								
	-	-		10°																																									
	Fixture Power	50W		1	0.17	63280																																							
	Source Flux	2753lm		2	0.34	15820																																							
Fixture Flux	2333lm	3	0.51	7031																																									
Efficacy	47lm/W	4	0.68	3955																																									
TS1783	Imax=22986cd/klm	Imax	63280cd	5	0.85	2531																																							
Nominal flux	2753lm																																												
Fixture flux	2333lm																																												
Luminous efficacy	47lm/W																																												
RGB	Fixture Power	36.5W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>37W</td><td>1</td><td>0.17</td><td>34754</td></tr><tr><td>Source Flux</td><td>1512lm</td><td>2</td><td>0.34</td><td>8689</td></tr><tr><td>Fixture Flux</td><td>1281lm</td><td>3</td><td>0.51</td><td>3862</td></tr><tr><td>Efficacy</td><td>35lm/W</td><td>4</td><td>0.68</td><td>2172</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>34754cd</td><td>5</td><td>0.85</td><td>1390</td></tr></table>					-	H(m)	D(m)	Emax(lx)		-	-	10°			Fixture Power	37W	1	0.17	34754	Source Flux	1512lm	2	0.34	8689	Fixture Flux	1281lm	3	0.51	3862	Efficacy	35lm/W	4	0.68	2172	TS1783	Imax=22986cd/klm	Imax	34754cd	5	0.85	1390
	-	H(m)		D(m)	Emax(lx)																																								
	-	-		10°																																									
	Fixture Power	37W		1	0.17	34754																																							
	Source Flux	1512lm		2	0.34	8689																																							
Fixture Flux	1281lm	3	0.51	3862																																									
Efficacy	35lm/W	4	0.68	2172																																									
TS1783	Imax=22986cd/klm	Imax	34754cd	5	0.85	1390																																							
Nominal flux	1512lm																																												
Fixture flux	1281lm																																												
Luminous efficacy	35lm/W																																												
WHITE	CCT nominal	6500K		<table><tr><td>6500K</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>Ra80</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>13W</td><td>1</td><td>0.17</td><td>30525</td></tr><tr><td>Source Flux</td><td>1328lm</td><td>2</td><td>0.34</td><td>7631</td></tr><tr><td>Fixture Flux</td><td>1125lm</td><td>3</td><td>0.51</td><td>3392</td></tr><tr><td>Efficacy</td><td>85lm/W</td><td>4</td><td>0.68</td><td>1908</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>30525cd</td><td>5</td><td>0.85</td><td>1221</td></tr></table>					6500K	H(m)	D(m)	Emax(lx)		Ra80	-	10°			Fixture Power	13W	1	0.17	30525	Source Flux	1328lm	2	0.34	7631	Fixture Flux	1125lm	3	0.51	3392	Efficacy	85lm/W	4	0.68	1908	TS1783	Imax=22986cd/klm	Imax	30525cd	5	0.85	1221
	6500K	H(m)		D(m)	Emax(lx)																																								
	Ra80	-		10°																																									
	Fixture Power	13W		1	0.17	30525																																							
	Source Flux	1328lm		2	0.34	7631																																							
	Fixture Flux	1125lm		3	0.51	3392																																							
	Efficacy	85lm/W		4	0.68	1908																																							
TS1783	Imax=22986cd/klm	Imax	30525cd	5	0.85	1221																																							
Colour rendering index	80																																												
Fixture Power	13.3W																																												
Nominal flux	1328lm																																												
Fixture flux	1125lm																																												
Luminous efficacy	85lm/W																																												
RED	Fixture Power	9.4W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>9W</td><td>1</td><td>0.17</td><td>10367</td></tr><tr><td>Source Flux</td><td>451lm</td><td>2</td><td>0.34</td><td>2592</td></tr><tr><td>Fixture Flux</td><td>382lm</td><td>3</td><td>0.51</td><td>1152</td></tr><tr><td>Efficacy</td><td>41lm/W</td><td>4</td><td>0.68</td><td>648</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>10367cd</td><td>5</td><td>0.85</td><td>415</td></tr></table>					-	H(m)	D(m)	Emax(lx)		-	-	10°			Fixture Power	9W	1	0.17	10367	Source Flux	451lm	2	0.34	2592	Fixture Flux	382lm	3	0.51	1152	Efficacy	41lm/W	4	0.68	648	TS1783	Imax=22986cd/klm	Imax	10367cd	5	0.85	415
	-	H(m)		D(m)	Emax(lx)																																								
	-	-		10°																																									
	Fixture Power	9W		1	0.17	10367																																							
	Source Flux	451lm		2	0.34	2592																																							
Fixture Flux	382lm	3	0.51	1152																																									
Efficacy	41lm/W	4	0.68	648																																									
TS1783	Imax=22986cd/klm	Imax	10367cd	5	0.85	415																																							
Nominal flux	451lm																																												
Fixture flux	382lm																																												
Luminous efficacy	41lm/W																																												
GREEN	Fixture Power	14.9W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>15W</td><td>1</td><td>0.17</td><td>23055</td></tr><tr><td>Source Flux</td><td>1003lm</td><td>2</td><td>0.34</td><td>5764</td></tr><tr><td>Fixture Flux</td><td>850lm</td><td>3</td><td>0.51</td><td>2562</td></tr><tr><td>Efficacy</td><td>57lm/W</td><td>4</td><td>0.68</td><td>1441</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>23055cd</td><td>5</td><td>0.85</td><td>922</td></tr></table>					-	H(m)	D(m)	Emax(lx)		-	-	10°			Fixture Power	15W	1	0.17	23055	Source Flux	1003lm	2	0.34	5764	Fixture Flux	850lm	3	0.51	2562	Efficacy	57lm/W	4	0.68	1441	TS1783	Imax=22986cd/klm	Imax	23055cd	5	0.85	922
	-	H(m)		D(m)	Emax(lx)																																								
	-	-		10°																																									
	Fixture Power	15W		1	0.17	23055																																							
	Source Flux	1003lm		2	0.34	5764																																							
Fixture Flux	850lm	3	0.51	2562																																									
Efficacy	57lm/W	4	0.68	1441																																									
TS1783	Imax=22986cd/klm	Imax	23055cd	5	0.85	922																																							
Nominal flux	1003lm																																												
Fixture flux	850lm																																												
Luminous efficacy	57lm/W																																												
BLUE	Fixture Power	12.1W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>12W</td><td>1</td><td>0.17</td><td>3770</td></tr><tr><td>Source Flux</td><td>164lm</td><td>2</td><td>0.34</td><td>942</td></tr><tr><td>Fixture Flux</td><td>139lm</td><td>3</td><td>0.51</td><td>419</td></tr><tr><td>Efficacy</td><td>11lm/W</td><td>4</td><td>0.68</td><td>236</td></tr><tr><td>TS1783</td><td>Imax=22986cd/klm</td><td>Imax</td><td>3770cd</td><td>5</td><td>0.85</td><td>151</td></tr></table>					-	H(m)	D(m)	Emax(lx)		-	-	10°			Fixture Power	12W	1	0.17	3770	Source Flux	164lm	2	0.34	942	Fixture Flux	139lm	3	0.51	419	Efficacy	11lm/W	4	0.68	236	TS1783	Imax=22986cd/klm	Imax	3770cd	5	0.85	151
	-	H(m)		D(m)	Emax(lx)																																								
	-	-		10°																																									
	Fixture Power	12W		1	0.17	3770																																							
	Source Flux	164lm		2	0.34	942																																							
	Fixture Flux	139lm		3	0.51	419																																							
	Efficacy	11lm/W		4	0.68	236																																							
TS1783	Imax=22986cd/klm	Imax	3770cd	5	0.85	151																																							
Nominal flux	164lm																																												
Fixture flux	139lm																																												
Luminous efficacy	11lm/W																																												

Accessories


Filter



CODE	COLOUR
1E4010	

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Grid



CODE	COLOUR
1E4013	

Anti-glare louver.
Powder coated stainless steel.

Screen




CODE	COLOUR
1E4011	

Asymmetric screen.
Powder coated stainless steel.



CODE	COLOUR
1E4012	

Cylindrical screen.
Powder coated stainless steel.
Short version.



CODE	COLOUR
1E4059	

Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



CODE	COLOUR
1E3026	

Plate for fixture rotation.
Powder coated stainless steel.



CODE	COLOUR	ØXH
1E3188		150x352mm

Earthspike.
Powder coated stainless steel.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Mounting System



CODE

1E2825

COLOUR



Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).




CODE

1E3097

COLOUR



Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.



CODE

1E3187

COLOUR



Pole with base.
Powder coated stainless steel.

Control systems



CODE

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



CODE

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Control systems



CODE

1T6499

myScenario Wall.

DMX controller with a glass touch sensitive screen for architectural applications.

It can control two different DMX universes (2x 512 channels).

Stand alone function or connected to a computer using a USB port.

Software for creating scenarios (that can be downloaded from the Targetti website) included.


It can manage 10 different lighting zones and 50 scenarios per zone.

The touch keys on the front make it possible to modify and recall programmed scenarios.

USB cable included.

To be used with all RGBW products.

Surge protector



CODE

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.