

PROJECTORS


Jedi Projector - L. 616mm

Code

1E2587

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 80	Grazing 15° / 76°	28W 2961lm

POWER SUPPLY CONTROL	COLOUR
----------------------	--------

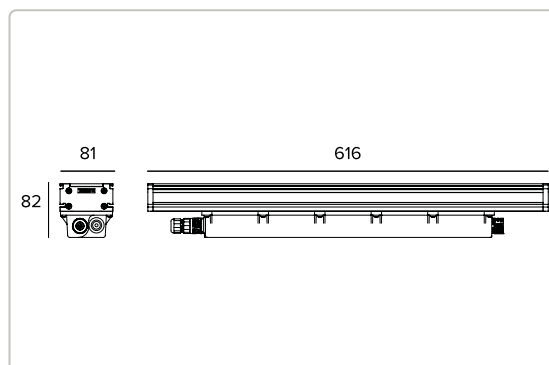220-240Vac
DALI

The figures on the drawing are expressed in mm.



	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)		
	Ra80	15°	76°				
Fixture Power	28W	1	0.26	1.55	5474		
Source Flux	3420lm	2	0.51	3.10	1368		
Fixture Flux	2961lm	3	0.77	4.65	608		
Efficacy	106lm/W	4	1.02	6.21	342		
TS887	I _{max} =1601cd/klm	I _{max}	5474cd	5	1.28	7.76	219

Technical Data

Concept

Adjustable linear LED projector.

Source

Linear Low Power High Efficiency LED board Ra80. 2700K-3500K on request.

Energy efficiency class	D
Nominal power	24W
Nominal flux	3420lm
Colour rendering index	80
R _f	82.9
R _g	97
CCT nominal	3000K
SDCM	2
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Internal optical system composed of a primary cylindrical glass lens, a high reflectance anodised aluminium reflector and an integrated holographic filter.

Optic	Grazing
Beam angles	GRZ
Optical efficiency	86.58%
Fixture flux	2961lm
Luminous efficacy	106lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Extruded anodised aluminium 15μ body. Extra clear 4mm thick glass flat screen. Black polycarbonate driver box. The body of the fixture is adjustable and can be installed away from the mounting surface by sliding the brackets along a special guide.

Colour and finish	Aluminium
Dimensions	AxBxH 616x81x82mm
Weight	2.84Kg
Degree of protection	IP66,IP67
Mechanical Resistance	IK08

Electrical characteristics

DALI version with an integrated power supply. Complete with IP68 connector for power supply. To be completed with a watertight IP68 (IN-OUT) connector kit with a quick installation system (1E2769) or with a connection cable complete with 5 pin connector (1E2762, 1E2763, 1E2764, 1E2765) for in-line installations. Fixture with "internal" wire feedthrough. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	28W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	DALI
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +40°C

Installation

To be completed with stainless steel fixed or adjustable brackets. The brackets can slide along the body of the fixture to be positioned according to installation needs.

Notes

Casambi control system available using a dedicated accessory. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^{\circ}\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Related codes


Mounting System



CODE

1E2752


Short bracket for wall installation (2 pieces).



CODE

1E2753

Long bracket for wall installation (2 pieces).



CODE

1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps



CODE

1E2761

End cap with bracket for ceiling installation included.

Cover Panel




CODE

1E3045

L

616mm

Side cover for ceiling installation.




CODE

1E2755

L

616mm

Side cover for wall/cornice installation.



CODE

1E2758

L

616mm

Anti-glare side cover.

Accessories

Cable



CODE	L
1E2762	320mm
1E2763	470mm
1E2764	620mm
1E2765	770mm

Connection cable.
Complete with 5 pole connectors.
For the ON-OFF and DALI version.

1E2762 - For in line adjacent connection of one 600mm projector with one 900mm projector.

1E2763 - For in line adjacent connection of one 600mm projector with one 1200mm projector or two 900mm projectors.

1E2764 - For in line adjacent connection of one 900mm projector with one 1200mm projector.

1E2765 - For in line adjacent connection of two 1200mm projectors.

Connector



CODE
1E2769

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.

Control systems



CODE
1E3048

IP67 wireless control unit with DALI interface.

It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.

The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.

The control unit is preset to the DALI TCH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.
LxHxP=108x28x65mm.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Control systems



CODE

1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.

LxHxP=148x40x150mm.

Surge protector



CODE

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67



CODE

A013C

Surge protector compatible with CLASS I lighting fixtures.

DALI, DMX, 0-10V datalines compliance.

Operating voltage 230Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP20