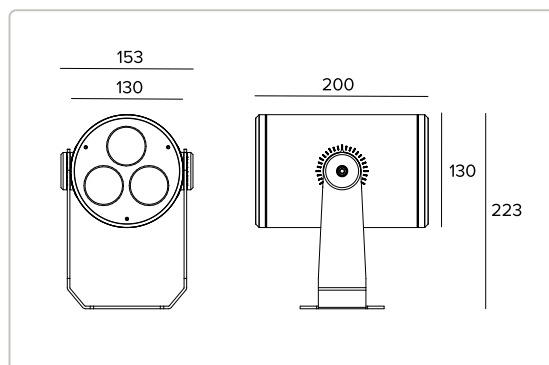
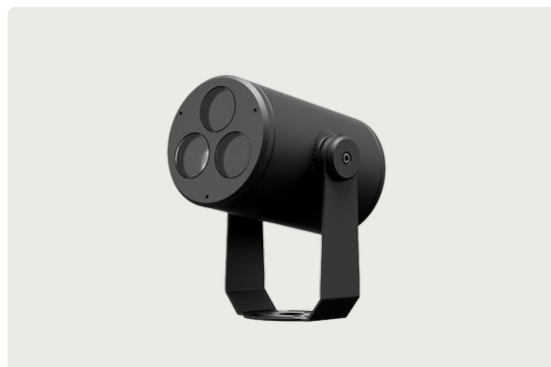


PROJECTORS

Dart Round Medium RGBW

Code
1E4061

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
RGBW	NSP 10°	32.8W 1265lm
POWER SUPPLY CONTROL	COLOUR	
850mA		



The figures on the drawing are expressed in mm.



The fixture's photometric values
can be found on the following pages

Technical Data

Concept

Professional adjustable LED projector.

Source

RGBW light module made of RGBW LED multichip. Color temperature of the white source: 6500K.

Energy efficiency class	F
Nominal power	33W
Nominal flux	See photometries
Colour rendering index	
CCT nominal	See photometries

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Equipped with precision methacrylate lenses.

Optic	NSP
Beam angles	NSP
Optical efficiency	80.73%
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish	Ferrite
Dimensions	ØxH 130x200mm
Weight	3.35Kg
Degree of protection	IP66
Mechanical Resistance	IK10

Electrical characteristics

Remote DMX-RDM electronic driver with 4 independent constant current outputs. The driver is housed inside an IP68 box and allows to control 1 fixture. Controlled using DMX-RDM protocols that make it possible to programme the fixture remotely (no dip-switch) using the DMX data line. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory. All versions are pre-wired with a 1.5m long 8-pole feeding cable (to be connected to the IP68 driver box).

Fixture Power	See photometries
Power supply	850mA
Insulation Class	CLASS 3
Driver included	NO
Ambient temperature	-25°C / +35°C

Installation

Mounting bracket with aiming adjustability. Adjustable up to $\pm 45^\circ$ on the horizontal pane and $+90^\circ/-45^\circ$ on the vertical plane.

Notes

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Photometrics show the maximum emission values of fixtures. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656







Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).


We reserve the right to make technical changes.

Photometries

RGBW	Fixture Power	32.8W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>33W</td><td>1</td><td>0.17</td><td>36267</td></tr><tr><td>Source Flux</td><td>1567lm</td><td>2</td><td>0.34</td><td>9067</td></tr><tr><td>Fixture Flux</td><td>1265lm</td><td>3</td><td>0.50</td><td>4030</td></tr><tr><td>Efficacy</td><td>39lm/W</td><td>4</td><td>0.67</td><td>2267</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>36267cd</td><td>5</td><td>0.84</td><td>1451</td></tr></table>				-	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	33W	1	0.17	36267	Source Flux	1567lm	2	0.34	9067	Fixture Flux	1265lm	3	0.50	4030	Efficacy	39lm/W	4	0.67	2267	TS1673	I _{max} =23144cd/klm	I _{max}	36267cd	5	0.84	1451
	-	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	33W		1	0.17	36267																																						
	Source Flux	1567lm		2	0.34	9067																																						
Fixture Flux	1265lm	3	0.50	4030																																								
Efficacy	39lm/W	4	0.67	2267																																								
TS1673	I _{max} =23144cd/klm	I _{max}	36267cd	5	0.84	1451																																						
Nominal flux	1567lm																																											
Fixture flux	1265lm																																											
Luminous efficacy	39lm/W																																											
RGB	Fixture Power	24.9W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>25W</td><td>1</td><td>0.17</td><td>18839</td></tr><tr><td>Source Flux</td><td>814lm</td><td>2</td><td>0.34</td><td>4710</td></tr><tr><td>Fixture Flux</td><td>657lm</td><td>3</td><td>0.50</td><td>2093</td></tr><tr><td>Efficacy</td><td>26lm/W</td><td>4</td><td>0.67</td><td>1177</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>18839cd</td><td>5</td><td>0.84</td><td>754</td></tr></table>				-	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	25W	1	0.17	18839	Source Flux	814lm	2	0.34	4710	Fixture Flux	657lm	3	0.50	2093	Efficacy	26lm/W	4	0.67	1177	TS1673	I _{max} =23144cd/klm	I _{max}	18839cd	5	0.84	754
	-	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	25W		1	0.17	18839																																						
	Source Flux	814lm		2	0.34	4710																																						
Fixture Flux	657lm	3	0.50	2093																																								
Efficacy	26lm/W	4	0.67	1177																																								
TS1673	I _{max} =23144cd/klm	I _{max}	18839cd	5	0.84	754																																						
Nominal flux	814lm																																											
Fixture flux	657lm																																											
Luminous efficacy	26lm/W																																											
WHITE	CCT nominal	6500K		<table><tr><td>6500K</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>9W</td><td>1</td><td>0.17</td><td>19904</td></tr><tr><td>Source Flux</td><td>860lm</td><td>2</td><td>0.34</td><td>4976</td></tr><tr><td>Fixture Flux</td><td>694lm</td><td>3</td><td>0.50</td><td>2212</td></tr><tr><td>Efficacy</td><td>81lm/W</td><td>4</td><td>0.67</td><td>1244</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>19904cd</td><td>5</td><td>0.84</td><td>796</td></tr></table>				6500K	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	9W	1	0.17	19904	Source Flux	860lm	2	0.34	4976	Fixture Flux	694lm	3	0.50	2212	Efficacy	81lm/W	4	0.67	1244	TS1673	I _{max} =23144cd/klm	I _{max}	19904cd	5	0.84	796
	6500K	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	9W		1	0.17	19904																																						
	Source Flux	860lm		2	0.34	4976																																						
Fixture Flux	694lm	3	0.50	2212																																								
Efficacy	81lm/W	4	0.67	1244																																								
TS1673	I _{max} =23144cd/klm	I _{max}	19904cd	5	0.84	796																																						
Fixture Power	8.6W																																											
Nominal flux	860lm																																											
Fixture flux	694lm																																											
Luminous efficacy	81lm/W																																											
RED	Fixture Power	6.5W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>7W</td><td>1</td><td>0.17</td><td>7360</td></tr><tr><td>Source Flux</td><td>318lm</td><td>2</td><td>0.34</td><td>1840</td></tr><tr><td>Fixture Flux</td><td>257lm</td><td>3</td><td>0.50</td><td>818</td></tr><tr><td>Efficacy</td><td>39lm/W</td><td>4</td><td>0.67</td><td>460</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>7360cd</td><td>5</td><td>0.84</td><td>294</td></tr></table>				-	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	7W	1	0.17	7360	Source Flux	318lm	2	0.34	1840	Fixture Flux	257lm	3	0.50	818	Efficacy	39lm/W	4	0.67	460	TS1673	I _{max} =23144cd/klm	I _{max}	7360cd	5	0.84	294
	-	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	7W		1	0.17	7360																																						
	Source Flux	318lm		2	0.34	1840																																						
Fixture Flux	257lm	3	0.50	818																																								
Efficacy	39lm/W	4	0.67	460																																								
TS1673	I _{max} =23144cd/klm	I _{max}	7360cd	5	0.84	294																																						
Nominal flux	318lm																																											
Fixture flux	257lm																																											
Luminous efficacy	39lm/W																																											
GREEN	Fixture Power	10W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>10W</td><td>1</td><td>0.17</td><td>13261</td></tr><tr><td>Source Flux</td><td>573lm</td><td>2</td><td>0.34</td><td>3315</td></tr><tr><td>Fixture Flux</td><td>463lm</td><td>3</td><td>0.50</td><td>1473</td></tr><tr><td>Efficacy</td><td>46lm/W</td><td>4</td><td>0.67</td><td>829</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>13261cd</td><td>5</td><td>0.84</td><td>530</td></tr></table>				-	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	10W	1	0.17	13261	Source Flux	573lm	2	0.34	3315	Fixture Flux	463lm	3	0.50	1473	Efficacy	46lm/W	4	0.67	829	TS1673	I _{max} =23144cd/klm	I _{max}	13261cd	5	0.84	530
	-	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	10W		1	0.17	13261																																						
	Source Flux	573lm		2	0.34	3315																																						
Fixture Flux	463lm	3	0.50	1473																																								
Efficacy	46lm/W	4	0.67	829																																								
TS1673	I _{max} =23144cd/klm	I _{max}	13261cd	5	0.84	530																																						
Nominal flux	573lm																																											
Fixture flux	463lm																																											
Luminous efficacy	46lm/W																																											
BLUE	Fixture Power	8.8W		<table><tr><td>-</td><td>H(m)</td><td>D(m)</td><td colspan="2">E_{max}(lx)</td></tr><tr><td>-</td><td>-</td><td>10°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>9W</td><td>1</td><td>0.17</td><td>2592</td></tr><tr><td>Source Flux</td><td>112lm</td><td>2</td><td>0.34</td><td>648</td></tr><tr><td>Fixture Flux</td><td>90lm</td><td>3</td><td>0.50</td><td>288</td></tr><tr><td>Efficacy</td><td>10lm/W</td><td>4</td><td>0.67</td><td>162</td></tr><tr><td>TS1673</td><td>I_{max}=23144cd/klm</td><td>I_{max}</td><td>2592cd</td><td>5</td><td>0.84</td><td>104</td></tr></table>				-	H(m)	D(m)	E _{max} (lx)		-	-	10°			Fixture Power	9W	1	0.17	2592	Source Flux	112lm	2	0.34	648	Fixture Flux	90lm	3	0.50	288	Efficacy	10lm/W	4	0.67	162	TS1673	I _{max} =23144cd/klm	I _{max}	2592cd	5	0.84	104
	-	H(m)		D(m)	E _{max} (lx)																																							
	-	-		10°																																								
	Fixture Power	9W		1	0.17	2592																																						
	Source Flux	112lm		2	0.34	648																																						
Fixture Flux	90lm	3	0.50	288																																								
Efficacy	10lm/W	4	0.67	162																																								
TS1673	I _{max} =23144cd/klm	I _{max}	2592cd	5	0.84	104																																						
Nominal flux	112lm																																											
Fixture flux	90lm																																											
Luminous efficacy	10lm/W																																											

Related codes

Power Supply



CODE

1E3883

DMX 4 channel driver - 850mA.
50W, LxHxP=220x80x120mm, 120-277Vac.
IP68 gray powder coated aluminum box.

Accessories

Filter



CODE

1E4263

COLOUR



Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Screen



CODE

1E4007

COLOUR



Asymmetric screen.
Powder coated stainless steel.



CODE

1E4008

COLOUR



Cylindrical screen.
Powder coated stainless steel.
Short version.



CODE

1E4058

COLOUR



Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



CODE

1E3026

COLOUR



Plate for fixture rotation.
Powder coated stainless steel.



CODE

1E3028

COLOUR



ØXH

96x182mm

Earthspike.
Powder coated stainless steel.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Mounting System



CODE

1E2825

COLOUR



Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).



CODE

1E3027

COLOUR



Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.

Control systems



CODE

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



CODE

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



CODE

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.