

PROIETTORI

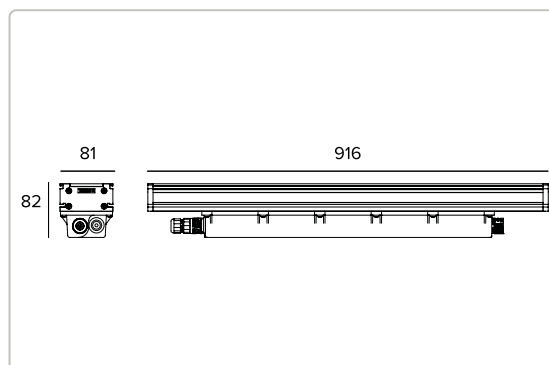
Jedi Proiettore - L. 916mm

Codice

1E2642

TONALITÀ LUCE	DISTRIBUZIONE LUCE	OUTPUT
4000K 80	Wall Washer	40W 4049lm

ALIMENTAZIONE CONTROLLO	COLORE
-------------------------	--------

220-240Vac
ON-OFF

Le quote riportate sul disegno sono espresse in mm.



The diagram shows a light beam with a beam spread of 28°. The beam diameter at 1m is 0.55m, and at 3m it is 1.66m. The beam diameter at 5m is 2.77m. The beam diameter at 7.5m is 4.167m. The beam diameter at 10m is 5.10m. The beam diameter at 15m is 7.65m. The beam diameter at 20m is 10.11m. The beam diameter at 25m is 12.66m. The beam diameter at 30m is 15.21m. The beam diameter at 35m is 17.76m. The beam diameter at 40m is 20.31m. The beam diameter at 45m is 22.86m. The beam diameter at 50m is 25.41m. The beam diameter at 55m is 27.96m. The beam diameter at 60m is 30.51m. The beam diameter at 65m is 33.06m. The beam diameter at 70m is 35.61m. The beam diameter at 75m is 38.16m. The beam diameter at 80m is 40.71m. The beam diameter at 85m is 43.26m. The beam diameter at 90m is 45.81m. The beam diameter at 95m is 48.36m. The beam diameter at 100m is 50.91m. The beam diameter at 105m is 53.46m. The beam diameter at 110m is 56.01m. The beam diameter at 115m is 58.56m. The beam diameter at 120m is 61.11m. The beam diameter at 125m is 63.66m. The beam diameter at 130m is 66.21m. The beam diameter at 135m is 68.76m. The beam diameter at 140m is 71.31m. The beam diameter at 145m is 73.86m. The beam diameter at 150m is 76.41m. The beam diameter at 155m is 78.96m. The beam diameter at 160m is 81.51m. The beam diameter at 165m is 84.06m. The beam diameter at 170m is 86.61m. The beam diameter at 175m is 89.16m. The beam diameter at 180m is 91.71m. The beam diameter at 185m is 94.26m. The beam diameter at 190m is 96.81m. The beam diameter at 195m is 99.36m. The beam diameter at 200m is 101.91m. The beam diameter at 205m is 104.46m. The beam diameter at 210m is 107.01m. The beam diameter at 215m is 109.56m. The beam diameter at 220m is 112.11m. The beam diameter at 225m is 114.66m. The beam diameter at 230m is 117.21m. The beam diameter at 235m is 119.76m. The beam diameter at 240m is 122.31m. The beam diameter at 245m is 124.86m. The beam diameter at 250m is 127.41m. The beam diameter at 255m is 130.06m. The beam diameter at 260m is 132.61m. The beam diameter at 265m is 135.16m. The beam diameter at 270m is 137.71m. The beam diameter at 275m is 140.26m. The beam diameter at 280m is 142.81m. The beam diameter at 285m is 145.36m. The beam diameter at 290m is 147.91m. The beam diameter at 295m is 150.46m. The beam diameter at 300m is 153.01m. The beam diameter at 305m is 155.56m. The beam diameter at 310m is 158.11m. The beam diameter at 315m is 160.66m. The beam diameter at 320m is 163.21m. The beam diameter at 325m is 165.76m. The beam diameter at 330m is 168.31m. The beam diameter at 335m is 170.86m. The beam diameter at 340m is 173.41m. The beam diameter at 345m is 175.96m. The beam diameter at 350m is 178.51m. The beam diameter at 355m is 181.06m. The beam diameter at 360m is 183.61m. The beam diameter at 365m is 186.16m. The beam diameter at 370m is 188.71m. The beam diameter at 375m is 191.26m. The beam diameter at 380m is 193.81m. The beam diameter at 385m is 196.36m. The beam diameter at 390m is 198.91m. The beam diameter at 395m is 201.46m. The beam diameter at 400m is 204.01m. The beam diameter at 405m is 206.56m. The beam diameter at 410m is 209.11m. The beam diameter at 415m is 211.66m. The beam diameter at 420m is 214.21m. The beam diameter at 425m is 216.76m. The beam diameter at 430m is 219.31m. The beam diameter at 435m is 221.86m. The beam diameter at 440m is 224.41m. The beam diameter at 445m is 226.96m. The beam diameter at 450m is 229.51m. The beam diameter at 455m is 232.06m. The beam diameter at 460m is 234.61m. The beam diameter at 465m is 237.16m. The beam diameter at 470m is 239.71m. The beam diameter at 475m is 242.26m. The beam diameter at 480m is 244.81m. The beam diameter at 485m is 247.36m. The beam diameter at 490m is 249.91m. The beam diameter at 495m is 252.46m. The beam diameter at 500m is 255.01m. The beam diameter at 505m is 257.56m. The beam diameter at 510m is 260.11m. The beam diameter at 515m is 262.66m. The beam diameter at 520m is 265.21m. The beam diameter at 525m is 267.76m. The beam diameter at 530m is 270.31m. The beam diameter at 535m is 272.86m. The beam diameter at 540m is 275.41m. The beam diameter at 545m is 277.96m. The beam diameter at 550m is 280.51m. The beam diameter at 555m is 283.06m. The beam diameter at 560m is 285.61m. The beam diameter at 565m is 288.16m. The beam diameter at 570m is 290.71m. The beam diameter at 575m is 293.26m. The beam diameter at 580m is 295.81m. The beam diameter at 585m is 298.36m. The beam diameter at 590m is 300.91m. The beam diameter at 595m is 303.46m. The beam diameter at 600m is 306.01m. The beam diameter at 605m is 308.56m. The beam diameter at 610m is 311.11m. The beam diameter at 615m is 313.66m. The beam diameter at 620m is 316.21m. The beam diameter at 625m is 318.76m. The beam diameter at 630m is 321.31m. The beam diameter at 635m is 323.86m. The beam diameter at 640m is 326.41m. The beam diameter at 645m is 328.96m. The beam diameter at 650m is 331.51m. The beam diameter at 655m is 334.06m. The beam diameter at 660m is 336.61m. The beam diameter at 665m is 339.16m. The beam diameter at 670m is 341.71m. The beam diameter at 675m is 344.26m. The beam diameter at 680m is 346.81m. The beam diameter at 685m is 349.36m. The beam diameter at 690m is 351.91m. The beam diameter at 695m is 354.46m. The beam diameter at 700m is 357.01m. The beam diameter at 705m is 359.56m. The beam diameter at 710m is 362.11m. The beam diameter at 715m is 364.66m. The beam diameter at 720m is 367.21m. The beam diameter at 725m is 369.76m. The beam diameter at 730m is 372.31m. The beam diameter at 735m is 374.86m. The beam diameter at 740m is 377.41m. The beam diameter at 745m is 379.96m. The beam diameter at 750m is 382.51m. The beam diameter at 755m is 385.06m. The beam diameter at 760m is 387.61m. The beam diameter at 765m is 390.16m. The beam diameter at 770m is 392.71m. The beam diameter at 775m is 395.26m. The beam diameter at 780m is 397.81m. The beam diameter at 785m is 400.36m. The beam diameter at 790m is 402.91m. The beam diameter at 795m is 405.46m. The beam diameter at 800m is 408.01m. The beam diameter at 805m is 410.56m. The beam diameter at 810m is 413.11m. The beam diameter at 815m is 415.66m. The beam diameter at 820m is 418.21m. The beam diameter at 825m is 420.76m. The beam diameter at 830m is 423.31m. The beam diameter at 835m is 425.86m. The beam diameter at 840m is 428.41m. The beam diameter at 845m is 430.96m. The beam diameter at 850m is 433.51m. The beam diameter at 855m is 436.06m. The beam diameter at 860m is 438.61m. The beam diameter at 865m is 441.16m. The beam diameter at 870m is 443.71m. The beam diameter at 875m is 446.26m. The beam diameter at 880m is 448.81m. The beam diameter at 885m is 451.36m. The beam diameter at 890m is 453.91m. The beam diameter at 895m is 456.46m. The beam diameter at 900m is 459.01m. The beam diameter at 905m is 461.56m. The beam diameter at 910m is 464.11m. The beam diameter at 915m is 466.66m. The beam diameter at 920m is 469.21m. The beam diameter at 925m is 471.76m. The beam diameter at 930m is 474.31m. The beam diameter at 935m is 476.86m. The beam diameter at 940m is 479.41m. The beam diameter at 945m is 481.96m. The beam diameter at 950m is 484.51m. The beam diameter at 955m is 487.06m. The beam diameter at 960m is 489.61m. The beam diameter at 965m is 492.16m. The beam diameter at 970m is 494.71m. The beam diameter at 975m is 497.26m. The beam diameter at 980m is 499.81m. The beam diameter at 985m is 502.36m. The beam diameter at 990m is 504.91m. The beam diameter at 995m is 507.46m. The beam diameter at 1000m is 510.01m. The beam diameter at 1005m is 512.56m. The beam diameter at 1010m is 515.11m. The beam diameter at 1015m is 517.66m. The beam diameter at 1020m is 520.21m. The beam diameter at 1025m is 522.76m. The beam diameter at 1030m is 525.31m. The beam diameter at 1035m is 527.86m. The beam diameter at 1040m is 530.41m. The beam diameter at 1045m is 532.96m. The beam diameter at 1050m is 535.51m. The beam diameter at 1055m is 538.06m. The beam diameter at 1060m is 540.61m. The beam diameter at 1065m is 543.16m. The beam diameter at 1070m is 545.71m. The beam diameter at 1075m is 548.26m. The beam diameter at 1080m is 550.81m. The beam diameter at 1085m is 553.36m. The beam diameter at 1090m is 555.91m. The beam diameter at 1095m is 558.46m. The beam diameter at 1100m is 561.01m. The beam diameter at 1105m is 563.56m. The beam diameter at 1110m is 566.11m. The beam diameter at 1115m is 568.66m. The beam diameter at 1120m is 571.21m. The beam diameter at 1125m is 573.76m. The beam diameter at 1130m is 576.31m. The beam diameter at 1135m is 578.86m. The beam diameter at 1140m is 581.41m. The beam diameter at 1145m is 583.96m. The beam diameter at 1150m is 586.51m. The beam diameter at 1155m is 589.06m. The beam diameter at 1160m is 591.61m. The beam diameter at 1165m is 594.16m. The beam diameter at 1170m is 596.71m. The beam diameter at 1175m is 599.26m. The beam diameter at 1180m is 601.81m. The beam diameter at 1185m is 604.36m. The beam diameter at 1190m is 606.91m. The beam diameter at 1195m is 609.46m. The beam diameter at 1200m is 612.01m. The beam diameter at 1205m is 614.56m. The beam diameter at 1210m is 617.11m. The beam diameter at 1215m is 619.66m. The beam diameter at 1220m is 622.21m. The beam diameter at 1225m is 624.76m. The beam diameter at 1230m is 627.31m. The beam diameter at 1235m is 629.86m. The beam diameter at 1240m is 632.41m. The beam diameter at 1245m is 634.96m. The beam diameter at 1250m is 637.51m. The beam diameter at 1255m is 640.06m. The beam diameter at 1260m is 642.61m. The beam diameter at 1265m is 645.16m. The beam diameter at 1270m is 647.71m. The beam diameter at 1275m is 650.26m. The beam diameter at 1280m is 652.81m. The beam diameter at 1285m is 655.36m. The beam diameter at 1290m is 657.91m. The beam diameter at 1295m is 660.46m. The beam diameter at 1300m is 663.01m. The beam diameter at 1305m is 665.56m. The beam diameter at 1310m is 668.11m. The beam diameter at 1315m is 670.66m. The beam diameter at 1320m is 673.21m. The beam diameter at 1325m is 675.76m. The beam diameter at 1330m is 678.31m. The beam diameter at 1335m is 680.86m. The beam diameter at 1340m is 683.41m. The beam diameter at 1345m is 685.96m. The beam diameter at 1350m is 688.51m. The beam diameter at 1355m is 691.06m. The beam diameter at 1360m is 693.61m. The beam diameter at 1365m is 696.16m. The beam diameter at 1370m is 698.71m. The beam diameter at 1375m is 701.26m. The beam diameter at 1380m is 703.81m. The beam diameter at 1385m is 706.36m. The beam diameter at 1390m is 708.91m. The beam diameter at 1395m is 711.46m. The beam diameter at 1400m is 714.01m. The beam diameter at 1405m is 716.56m. The beam diameter at 1410m is 719.11m. The beam diameter at 1415m is 721.66m. The beam diameter at 1420m is 724.21m. The beam diameter at 1425m is 726.76m. The beam diameter at 1430m is 729.31m. The beam diameter at 1435m is 731.86m. The beam diameter at 1440m is 734.41m. The beam diameter at 1445m is 736.96m. The beam diameter at 1450m is 739.51m. The beam diameter at 1455m is 742.06m. The beam diameter at 1460m is 744.61m. The beam diameter at 1465m is 747.16m. The beam diameter at 1470m is 749.71m. The beam diameter at 1475m is 752.26m. The beam diameter at 1480m is 754.81m. The beam diameter at 1485m is 757.36m. The beam diameter at 1490m is 759.91m. The beam diameter at 1495m is 762.46m. The beam diameter at 1500m is 765.01m. The beam diameter at 1505m is 767.56m. The beam diameter at 1510m is 770.11m. The beam diameter at 1515m is 772.66m. The beam diameter at 1520m is 775.21m. The beam diameter at 1525m is 777.76m. The beam diameter at 1530m is 780.31m. The beam diameter at 1535m is 782.86m. The beam diameter at 1540m is 785.41m. The beam diameter at 1545m is 787.96m. The beam diameter at 1550m is 790.51m. The beam diameter at 1555m is 793.06m. The beam diameter at 1560m is 795.61m. The beam diameter at 1565m is 798.16m. The beam diameter at 1570m is 800.71m. The beam diameter at 1575m is 803.26m. The beam diameter at 1580m is 805.81m. The beam diameter at 1585m is 808.36m. The beam diameter at 1590m is 810.91m. The beam diameter at 1595m is 813.46m. The beam diameter at 1600m is 816.01m. The beam diameter at 1605m is 818.56m. The beam diameter at 1610m is 821.11m. The beam diameter at 1615m is 823.66m. The beam diameter at 1620m is 826.21m. The beam diameter at 1625m is 828.76m. The beam diameter at 1630m is 831.31m. The beam diameter at 1635m is 833.86m. The beam diameter at 1640m is 836.41m. The beam diameter at 1645m is 838.96m. The beam diameter at 1650m is 841.51m. The beam diameter at 1655m is 844.06m. The beam diameter at 1660m is 846.61m. The beam diameter at 1665m is 849.16m. The beam diameter at 1670m is 851.71m. The beam diameter at 1675m is 854.26m. The beam diameter at 1680m is 856.81m. The beam diameter at 1685m is 859.36m. The beam diameter at 1690m is 861.91m. The beam diameter at 1695m is 864.46m. The beam diameter at 1700m is 867.01m. The beam diameter at 1705m is 869.56m. The beam diameter at 1710m is 872.11m. The beam diameter at 1715m is 874.66m. The beam diameter at 1720m is 877.21m. The beam diameter at 1725m is 879.76m. The beam diameter at 1730m is 882.31m. The beam diameter at 1735m is 884.86m. The beam diameter at 1740m is 887.41m. The beam diameter at 1745m is 889.96m. The beam diameter at 1750m is 892.51m. The beam diameter at 1755m is 895.06m. The beam diameter at 1760m is 897.61m. The beam diameter at 1765m is 900.16m. The beam diameter at 1770m is 902.71m. The beam diameter at 1775m is 905.26m. The beam diameter at 1780m is 907.81m. The beam diameter at 1785m is 910.36m. The beam diameter at 1790m is 912.91m. The beam diameter at 1795m is 915.46m. The beam diameter at 1800m is 918.01m. The beam diameter at 1805m is 920.56m. The beam diameter at 1810m is 923.11m. The beam diameter at 1815m is 925.66m. The beam diameter at 1820m is 928.21m. The beam diameter at 1825m is 930.76m. The beam diameter at 1830m is 933.31m. The beam diameter at 1835m is 935.86m. The beam diameter at 1840m is 938.41m. The beam diameter at 1845m is 940.96m. The beam diameter at 1850m is 943.51m. The beam diameter at 1855m is 946.06m. The beam diameter at 1860m is 948.61m. The beam diameter at 1865m is 951.16m. The beam diameter at 1870m is 953.71m. The beam diameter at 1875m is 956.26m. The beam diameter at 1880m is 958.81m. The beam diameter at 1885m is 961.36m. The beam diameter at 1890m is 963.91m. The beam diameter at 1895m is 966.46m. The beam diameter at 1900m is 969.01m. The beam diameter at 1905m is 971.56m. The beam diameter at 1910m is 974.11m. The beam diameter at 1915m is 976.66m. The beam diameter at 1920m is 979.21m. The beam diameter at 1925m is 981.76m. The beam diameter at 1930m is 984.31m. The beam diameter at 1935m is 986.86m. The beam diameter at 1940m is 989.41m. The beam diameter at 1945m is 991.96m. The beam diameter at 1950m is 994.51m. The beam diameter at 1955m is 997.06m. The beam diameter at 1960m is 999.61m. The beam diameter at 1965m is 1002.16m. The beam diameter at 1970m is 1004.71m. The beam diameter at 1975m is 1007.26m. The beam diameter at 1980m is 1009.81m. The beam diameter at 1985m is 1012.36m. The beam diameter at 1990m is 1014.91m. The beam diameter at 1995m is 1017.46m. The beam diameter at 2000m is 1020.01m. The beam diameter at 2005m is 1022.56m. The beam diameter at 2010m is 1025.11m. The beam diameter at 2015m is 1027.66m. The beam diameter at 2020m is 1030.21m. The beam diameter at 2025m is 1032.76m. The beam diameter at 2030m is 1035.31m. The beam diameter at 2035m is 1037.86m. The beam diameter at 2040m is 1040.41m. The beam diameter at 2045m is 1042.96m. The beam diameter at 2050m is 1045.51m. The beam diameter at 2055m is 1048.06m. The beam diameter at 2060m is 1050.61m. The beam diameter at 2065m is 1053.16m. The beam diameter at 2070m is 1055.71m. The beam diameter at 2075m is 1058.26m. The beam diameter at 2080m is 1060.81m. The beam diameter at 2085m is 1063.36m. The beam diameter at 2090m is 1065.91m. The beam diameter at 2095m is 1068.46m. The beam diameter at 2100m is 1071.01m. The beam diameter at 2105m is 1073.56m. The beam diameter at 2110m is 1076.11m. The beam diameter at 2115m is 1078.66m. The beam diameter at 2120m is 1081.21m. The beam diameter at 2125m is 1083.76m. The beam diameter at 2130m is 1086.31m. The beam diameter at 2135m is 1088.86m. The beam diameter at 2140m is 1091.41m. The beam diameter at 2145m is 1093.96m. The beam diameter at 2150m is 1096.51m. The beam diameter at 2155m is 1099.06m. The beam diameter at 2160m is 1101.61m. The beam diameter at 2165m is 1104.16m. The beam diameter at 2170m is 1106.71m. The beam diameter at 2175m is 1109.26m. The beam diameter at 2180m is 1111.81m. The beam diameter at 2185m is 1114.36m. The beam diameter at 2190m is 1116.91m. The beam diameter at 2195m is 1119.46m. The beam diameter at 2200m is 1122.01m. The beam diameter at 2205m is 1124.56m. The beam diameter at 2210m is 1127.11m. The beam diameter at 2215m is 1129.66m. The beam diameter at 2220m is 1132.21m. The beam diameter at 2225m is 1134.76m. The beam diameter at 2230m is 1137.31m. The beam diameter at 2235m is 1139.86m. The beam diameter at 2240m is 1142.41m. The beam diameter at 2245m is 1144.96m. The beam diameter at 2250m is 1147.51m. The beam diameter at 2255m is 1150.06m. The beam diameter at 2260m is 1152.61m. The beam diameter at 2265m is 1155.16m. The beam diameter at 2270m is 1157.71m. The beam diameter at 2275m is 1160.26m. The beam diameter at 2280m is 1162.81m. The beam diameter at 2285m is 1165.36m. The beam diameter at 2290m is 1167.91m. The beam diameter at 2295m is 1170.46m. The beam diameter at 2300m is 1173.01m. The beam diameter at 2305m is 1175.56m. The beam diameter at 2310m is 1178.11m. The beam diameter at 2315m is 1180.66m. The beam diameter at 2320m is 1183.21m. The beam diameter at 2325m is 1185.76m. The beam diameter at 2330m is 1188.31m. The beam diameter at 2335m is 1190.86m. The beam diameter at 2340m is 1193.41m. The beam diameter at 2345m is 1195.96m. The beam diameter at 2350m is 1198.51m. The beam diameter at 2355m is 1201.06m. The beam diameter at 2360m is 1203.61m. The beam diameter at 2365m is 1206.16m. The beam diameter at 2370m is 1208.71m. The beam diameter at 2375m is 1211.26m. The beam diameter at 2380m is 1213.81m. The beam diameter at 2385m is 1216.36m. The beam diameter at 2390m is 1218.91m. The beam diameter at 2395m is 1221.46m. The beam diameter at 2400m is 1224.01m. The beam diameter at 2405m is 1226.56m. The beam diameter at 2410m is 1229.11m. The beam diameter at 2415m is 1231.66m. The beam diameter at 2420m is 1234.21m. The beam diameter at 2425m is 1236.76m. The beam diameter at 2430m is 1239.31m. The beam diameter at 2435m is 1241.86m. The beam diameter at 2440m is 1244.41m. The beam diameter at 2445m is 1246.96m. The beam diameter at 2450m is 1249.51m. The beam diameter at 2455m is 1252.06m. The beam diameter at 2460m is 1254.61m. The beam diameter at 2465m is 1257.16m. The beam diameter at 2470m is 1259.71m. The beam diameter at 2475m is 1262.26m. The beam diameter at 2480m is 1264.81m. The beam diameter at 2485m is 1267.36m. The beam diameter at 2490m is 1269.91m. The beam diameter at 2495m is 1272.46m. The beam diameter at 2500m is 1275.01m. The beam diameter at 2505m is 1277.56m. The beam diameter at 2510m is 1280.11m. The beam diameter at 2515m is 1282.66m. The beam diameter at 2520m is 1285.21m. The beam diameter at 2525m is 1287.76m. The beam diameter at 2530m is 1290.31m. The beam diameter at 2535m is 1292.86m. The beam diameter at 2540m is 1295.41m. The beam diameter at 2545m is 1297.96m. The beam diameter at 2550m is 1300.51m. The beam diameter at 2555m is 1303.06m. The beam diameter at 2560m is 1305.61m. The beam diameter at 2565m is 1308.16m. The beam diameter at 2570m is 1310.71m. The beam diameter at 2575m is 1313.26m. The beam diameter at 2580m is 1315.81m. The beam diameter at 2585m is 1318.36m. The beam diameter at 2590m is 1320.91m. The beam diameter at 2595m is 1323.46m. The beam diameter at 2600m is 1326.01m. The beam diameter at 2605m is 1328.56m. The beam diameter at 2610m is 1331.11m. The beam diameter at 2615m is 1333.66m. The beam diameter at 2620m is 1336.21m. The beam diameter at 2625m is 1338.76m. The beam diameter at 2630m is 1341.31m. The beam diameter at 2635m is 1343.86m. The beam diameter at 2640m is 1346.41m. The beam diameter at 2645m is 1348.96m. The beam diameter at 2650m is 1351.51m. The beam diameter at 2655m is 1354.06m. The beam diameter at 2660m is 1356.61m. The beam diameter at 2665m is 1359.16m. The beam diameter at 2670m is 1361.71m. The beam diameter at 2675m is 1364.26m. The beam diameter at 2680m is 1366.81m. The beam diameter at 2685m is 1369.36m. The beam diameter at 2690m is 1371.91m. The beam diameter at 2695m is 1374.46m. The beam diameter at 2700m is 1377.01m. The beam diameter at 2705m is 1379.56m. The beam diameter at 2710m is 1382.11m. The beam diameter at 2715m is 1384.66m. The beam diameter at 2720m is 1387.21m. The beam diameter at 2725m is 1389.76m. The beam diameter at 2730m is 1392.31m. The beam diameter at 2735m is 1394.86m. The beam diameter at 2740m is 1397.41m. The beam diameter at 2745m is 1399.96m. The beam diameter at 2750m is 1402.51m. The beam diameter at 2755m is 1405.06m. The beam diameter at 2760m is 1407.61m. The beam diameter at 2765m is 1410.16m. The beam diameter at 2770m is 1412.71m. The beam diameter at 2775m is 1415.26m. The beam diameter at 2780m is 1417.81m. The beam diameter at 2785m is 1420.36m. The beam diameter at 2790m is 1422.91m. The beam diameter at 2795m is 1425.46m. The beam diameter at 2800m is 1428.01m. The beam diameter at 2805m is 1430.56m. The beam diameter at 2810m is 1433.11m. The beam diameter at 2815m is 1435.66m. The beam diameter at 2820m is 1438.21m. The beam diameter at 2825m is 1440.76m. The beam diameter at 2830m is 1443.31m. The beam diameter at 2835m is 1445.86m. The beam diameter at 2840m is 1448.41m. The beam diameter at 2845m is 1450.96m. The beam diameter at 2850m is 1453.51m. The beam diameter at 2855m is 1456.06m. The beam diameter at 2860m is 1458.61m. The beam diameter at 2865m is 1461.16m. The beam diameter at 2870m is 1463.71m. The beam diameter at 2875m is 1466.26m. The beam diameter at 2880m is 1468.81m. The beam diameter at 2885m is 1471.36m. The beam diameter at 2890m is 1473.91m. The beam diameter at 2895m is 1476.46m. The beam diameter at 2900m is 1479.01m. The beam diameter at 2905m is 1481.56m. The beam diameter at 2910m is 1484.11m. The beam diameter at 2915m is 1486.66m. The beam diameter at 2920m is 1489.21m. The beam diameter at 2925m is 1491.76m. The beam diameter at 2930m is 1494.31m. The beam diameter at 2935m is 1496.86m. The beam diameter at 2940m is 1499.41m. The beam diameter at 2945m is 1501.96m. The beam diameter at 2950m is 1504.51m. The beam diameter at 2955m is 1507.06m. The beam diameter at 2960m is 1509.61m. The beam diameter at 2965m is 1512.16m. The beam diameter at 2970m is 1514.71m. The beam diameter at 2975m is 1517.26m. The beam diameter at 2980m is 1519.81m. The beam diameter at 2985m is 1522.36m. The beam diameter at 2990m is 1524.91m. The beam diameter at 2995m is 1527.46m. The beam diameter at 3000m is 1530.01m. The beam diameter at 3005m is 1532.56m. The beam diameter at 3010m is 1535.11m. The beam diameter at 3015m is 1537.66m. The beam diameter at 3020m is 1540.21m. The beam diameter at 3025m is 1542.76m. The beam diameter at 3030m is 1545.31m. The beam diameter at 3035m is 1547.86m. The beam diameter at 3040m is 1550.41m. The beam diameter at 3045m is 1552.96m. The beam diameter at 3050m is 1555.51m. The beam diameter at 3055m is 1558.06m. The beam diameter at 3060m is 1560.61m. The beam diameter at 3065m is 1563.16m. The beam diameter at 3070m is 1565.71m. The beam diameter at 3075m is 1568.26m. The beam diameter at 3080m is 1570.81m. The beam diameter at 3085m is 1573.3

Dati Tecnici

Concept

Proiettore lineare orientabile a LED.

Sorgente

Schede lineari LED Low Power High Efficiency Ra80. 2700K-3500K su richiesta.

Classe di efficienza energetica	D
Potenza nominale	36W
Flusso nominale	5385lm
Indice resa cromatica	80
R _f	82,6
R _g	95,7
CCT nominale	4000K
SDCM	2
Durata utile (L80/B10)	100000h tq +25°C
Durata utile (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato. tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Dati Tecnici

Caratteristiche illuminotecniche

Gruppo ottico interno composto da lente primaria cilindrica in vetro, riflettore in alluminio anodizzato ad alta riflettanza e filtro olografico integrato.

Ottica	Wall Washer
Apertura di fascio	WW
Rendimento ottico	75,2%
Flusso apparecchio	4049lm
Efficienza luminosa	101lm/W
Sicurezza fotobiologica	Conforme al gruppo di rischio basso RG1

Caratteristiche meccaniche

Corpo in alluminio estruso anodizzato 15 μ . Schermo piatto in vetro extrachiaro spessore 4mm. Box driver in policarbonato nero. Corpo dell'apparecchio orientabile e distanziabile dalla superficie di installazione attraverso lo scorrimento delle staffe accessorie lungo apposita guida.

Colore e finitura	Alluminio
Dimensioni	AxBxH 916x81x82mm
Peso	3,6Kg
Grado di protezione	IP66,IP67
Resistenza meccanica	IK08

Caratteristiche elettriche

Alimentazione elettronica integrata. Completo di connettore IP68 per alimentazione. Per installazione in fila continua completare con kit di connettori stagni IP68 (IN-OUT) con sistema di aggancio rapido (1E2769) o con cavo di collegamento completo di connettori 5 poli (1E2762, 1E2763, 1E2764, 1E2765). Apparecchio con linea passante "interna". Apparecchio conforme EN 60598-2-22 per alimentazione da un sistema di emergenza centralizzato CPSS (Central Power Supply System, comunemente chiamato soccorritore), non incorporato nell'apparecchio - escluso aree ad alto rischio. La potenza e il flusso di default sono pari al 100% in AC e al 100% in DC.

Potenza apparecchio	40W
Alimentazione	220-240Vac 50/60Hz
Classe di isolamento	CLASSE 1
Tipo driver / Controllo	ON-OFF
Driver incluso	SI
SAFE FLICKER	PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158), a garanzia di una luce più confortevole e sicura
Temperatura ambiente	-25°C / +40°C

Installazione

Da completare con staffe di fissaggio fisse o orientabili in acciaio inossidabile. Le staffe possono scorrere lungo il corpo dell'apparecchio per essere posizionate secondo le esigenze dell'installazione.

Note

Adotta la soluzione tecnica "Waterblock Smart" che prevede la resinatura dei cavi di collegamento, limitando il rischio di risalita dell'umidità verso il driver o l'apparecchio. Disponibile su richiesta in versione 110-277Vac.

Normativa e Certificazioni

CE

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A.: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Dati Tecnici

Garanzia

5 anni.

Avvertenze

Apparecchio progettato per essere smaltito/riciclato a fine vita. Sorgente luminosa (solo LED) sostituibile da un professionista. Alimentatore sostituibile da un professionista.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia


Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).


Si riserva la facoltà di apportare modifiche tecniche.

Codici a completamento


Sistema di fissaggio


CODICE
1E2752

Staffa corta per installazione a parete (2 pezzi).


CODICE
1E2753


Staffa lunga per installazione a parete (2 pezzi).


CODICE
1E2754

Staffa per installazione a plafone (2 pezzi).


Accessori

Tappi di chiusura



CODICE
1E2761

Tappo di chiusura comprensivo di staffa per installazione a plafone.


Pannello di copertura


CODICE
1E3046
L
916mm

Copertura laterale per installazione a plafone.


CODICE
1E2756
L
916mm

Copertura laterale per installazione a parete/cornicione.


CODICE
1E2759
L
916mm

Copertura laterale anti-abbagliamento.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656


Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Cavo



CODICE	L
1E2762	320mm
1E2763	470mm
1E2764	620mm
1E2765	770mm

Cavo di collegamento.
Completo di connettori 5 poli.
Per versione ON-OFF e DALI.

1E2762 - Per collegare in linea e adiacenti un proiettore da 600mm con uno da 900mm.
1E2763 - Per collegare in linea e adiacenti un proiettore da 600mm con uno da 1200mm o due proiettori da 900mm.
1E2764 - Per collegare in linea e adiacenti un proiettore da 900mm con uno da 1200mm.
1E2765 - Per collegare in linea e adiacenti due proiettori da 1200mm.


Connettore



CODICE
1E2769

Box di connessione lineare IP66/IP68.
5 poli, di sezione max 1,5mm².
Diametro del cavo da 7 a 12mm.

Scaricatore di sovratensione



CODICE
A013A

Scaricatore di sovratensione compatibile con tutti gli apparecchi di illuminazione in CLASSE I.
Tensione di funzionamento 230-277Vac.
SPD type 2+3.
Tensione massima di scarica 10kV.
CLASSE I
IP67

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.