WALL MOUNTED LUMINAIRES


Zeno 130 Applique



Code
T040WWR730ELDB


LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 97	Wall Washer	29.1W 1483lm

POWER SUPPLY CONTROL	COLOUR
220-240Vac ON-OFF	●

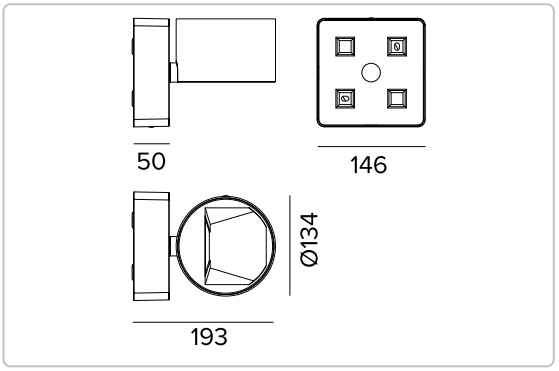

The figures on the drawing are expressed in mm.

1.55 IP40 CE



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra97			34°	54°	
Fixture Power	29W	1	1.06	1.16	1344
Source Flux	2620lm	2	2.11	2.33	336
Fixture Flux	1483lm	3	3.17	3.49	149
Efficacy	51lm/W	4	4.23	4.65	84
Imax	1952cd	5	5.28	5.81	54

Technical Data

Concept

Professional LED projector.

Source

High efficiency Chip on Board LED Ra97.	
Energy efficiency class	F
Nominal power	26W
Nominal flux	2620lm
Colour rendering index	97
Rf	95
Rg	103
CCT nominal	3000K
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

A highly reflective specular pre-anodised aluminium Wall Washer optical system, a holographic PMMA screen and a black polymer covering element.

Emission	Indirect
Optic	Wall Washer
Beam angles	WW
Optical efficiency	56.59%
Fixture flux	1483lm
Luminous efficacy	51lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Die-cast painted aluminium optical unit and power supply box. The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.

Colour and finish	Deep black
Dimensions	ØxH 134x85mm
Weight	1.55Kg
Degree of protection	IP40

Electrical characteristics

Integrated electronic power supply.

Fixture Power	29.1W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF
Driver included	YES
Ambient temperature	0°C / +25°C

Installation

Steel plate for wall installation.

Notes

110-277Vac version available on request.

Regulations and Certifications

CE

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.