

LIGHTING SYSTEMS

# Logico System - Ceiling/Suspension - Blind module - X connector

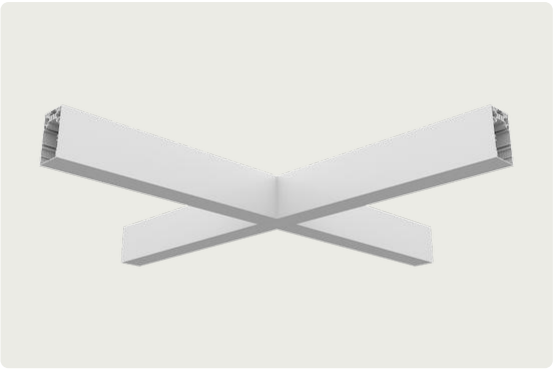

**Code**
**1T7389**

| POWER SUPPLY CONTROL | COLOUR |
|---|---|
| 220-240Vac | ◯ |

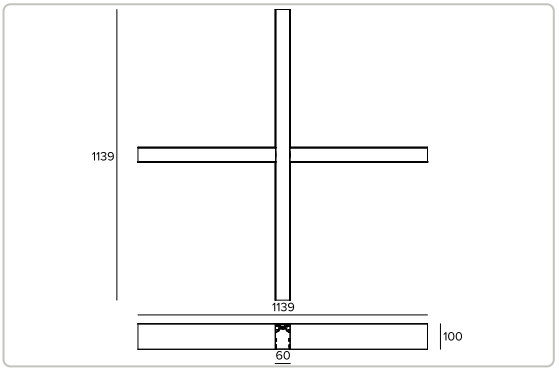


**The figures on the drawing are expressed in mm.**

4.7 IP20 CE

## Technical Data

### Concept

Blind module for ceiling or suspension system installation.

### Mechanical characteristics

Painted extruded aluminium linear body.

| | |
|---|---|
| Colour and finish | Plaster white |
| Dimensions | AxBxH 1139x1139x100mm |
| Weight | 4.7Kg |
| Version | X connector |
| Degree of protection | IP20 |

### Electrical characteristics

Complete with electrical cables to guarantee feeding continuity (max 2kW for the ceiling version; max 0.6kW for the suspension version).

| | |
|---|---|
| Power supply | 220-240Vac 50/60Hz |
| Insulation Class | CLASS 1 |

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Installation

For linear configurations complete with a special connector to attach to the power supply. For other configurations accessorise with special X, T and L connectors. To be completed with mounting systems and end caps.

### Regulations and Certifications

CE

### Warranty

5 years.

### Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Related codes


### End Caps



| CODE | COLOUR |
|---|---|
| 1T5937 | ◯ |


End caps for Ceiling Mounted and Suspension.
2x

### Mounting System



| CODE | COLOUR |
|---|---|
| 1T5912 | ◯ |


Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.



| CODE | COLOUR |
|---|---|
| 1T6919 | ◯ |

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version.

### Suspension




| CODE | COLOUR | L |
|---|---|---|
| 1T5899 | ◯ | 2000mm |
| 1T5902 | ◯ | 4000mm |

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

## Accessories

### Electrical Connector



| CODE |
|---|
| 1T5911 |

Linear electrical connector.
EL/DALI.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.