

PROIETTORI

Jedi Proiettore - L. 1216mm


Codice

1E2652

TONALITÀ LUCE	DISTRIBUZIONE LUCE	OUTPUT
4000K 80	Wall Washer	53W 5399lm

ALIMENTAZIONE
CONTROLLO

220-240Vac
DALI

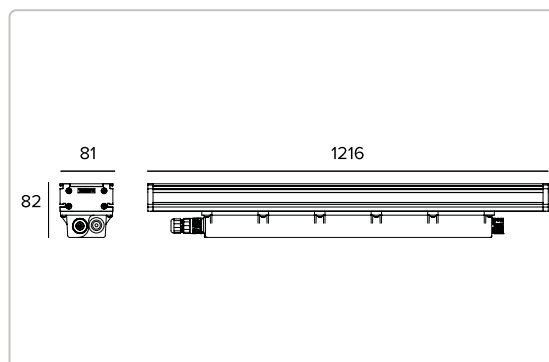

Le quote riportate sul disegno sono espresse in mm.



The diagram shows a light beam with a peak intensity of 774 cd/klm. The beam diameter is 1.11m at 2m distance and 3.40m at 4m distance. The beam diameter is 5.10m at 10m distance. The beam diameter is 6.79m at 15m distance. The beam diameter is 8.49m at 20m distance. The beam diameter is 10.21m at 25m distance. The beam diameter is 12.05m at 30m distance. The beam diameter is 14.06m at 40m distance. The beam diameter is 16.07m at 50m distance. The beam diameter is 18.08m at 60m distance. The beam diameter is 20.09m at 70m distance. The beam diameter is 22.10m at 80m distance. The beam diameter is 24.11m at 90m distance. The beam diameter is 26.12m at 100m distance. The beam diameter is 28.13m at 110m distance. The beam diameter is 30.14m at 120m distance. The beam diameter is 32.15m at 130m distance. The beam diameter is 34.16m at 140m distance. The beam diameter is 36.17m at 150m distance. The beam diameter is 38.18m at 160m distance. The beam diameter is 40.19m at 170m distance. The beam diameter is 42.20m at 180m distance. The beam diameter is 44.21m at 190m distance. The beam diameter is 46.22m at 200m distance. The beam diameter is 48.23m at 210m distance. The beam diameter is 50.24m at 220m distance. The beam diameter is 52.25m at 230m distance. The beam diameter is 54.26m at 240m distance. The beam diameter is 56.27m at 250m distance. The beam diameter is 58.28m at 260m distance. The beam diameter is 60.29m at 270m distance. The beam diameter is 62.30m at 280m distance. The beam diameter is 64.31m at 290m distance. The beam diameter is 66.32m at 300m distance. The beam diameter is 68.33m at 310m distance. The beam diameter is 70.34m at 320m distance. The beam diameter is 72.35m at 330m distance. The beam diameter is 74.36m at 340m distance. The beam diameter is 76.37m at 350m distance. The beam diameter is 78.38m at 360m distance. The beam diameter is 80.39m at 370m distance. The beam diameter is 82.40m at 380m distance. The beam diameter is 84.41m at 390m distance. The beam diameter is 86.42m at 400m distance. The beam diameter is 88.43m at 410m distance. The beam diameter is 90.44m at 420m distance. The beam diameter is 92.45m at 430m distance. The beam diameter is 94.46m at 440m distance. The beam diameter is 96.47m at 450m distance. The beam diameter is 98.48m at 460m distance. The beam diameter is 100.49m at 470m distance. The beam diameter is 102.50m at 480m distance. The beam diameter is 104.51m at 490m distance. The beam diameter is 106.52m at 500m distance. The beam diameter is 108.53m at 510m distance. The beam diameter is 110.54m at 520m distance. The beam diameter is 112.55m at 530m distance. The beam diameter is 114.56m at 540m distance. The beam diameter is 116.57m at 550m distance. The beam diameter is 118.58m at 560m distance. The beam diameter is 120.59m at 570m distance. The beam diameter is 122.60m at 580m distance. The beam diameter is 124.61m at 590m distance. The beam diameter is 126.62m at 600m distance. The beam diameter is 128.63m at 610m distance. The beam diameter is 130.64m at 620m distance. The beam diameter is 132.65m at 630m distance. The beam diameter is 134.66m at 640m distance. The beam diameter is 136.67m at 650m distance. The beam diameter is 138.68m at 660m distance. The beam diameter is 140.69m at 670m distance. The beam diameter is 142.70m at 680m distance. The beam diameter is 144.71m at 690m distance. The beam diameter is 146.72m at 700m distance. The beam diameter is 148.73m at 710m distance. The beam diameter is 150.74m at 720m distance. The beam diameter is 152.75m at 730m distance. The beam diameter is 154.76m at 740m distance. The beam diameter is 156.77m at 750m distance. The beam diameter is 158.78m at 760m distance. The beam diameter is 160.79m at 770m distance. The beam diameter is 162.80m at 780m distance. The beam diameter is 164.81m at 790m distance. The beam diameter is 166.82m at 800m distance. The beam diameter is 168.83m at 810m distance. The beam diameter is 170.84m at 820m distance. The beam diameter is 172.85m at 830m distance. The beam diameter is 174.86m at 840m distance. The beam diameter is 176.87m at 850m distance. The beam diameter is 178.88m at 860m distance. The beam diameter is 180.89m at 870m distance. The beam diameter is 182.90m at 880m distance. The beam diameter is 184.91m at 890m distance. The beam diameter is 186.92m at 900m distance. The beam diameter is 188.93m at 910m distance. The beam diameter is 190.94m at 920m distance. The beam diameter is 192.95m at 930m distance. The beam diameter is 194.96m at 940m distance. The beam diameter is 196.97m at 950m distance. The beam diameter is 198.98m at 960m distance. The beam diameter is 200.99m at 970m distance. The beam diameter is 203.00m at 980m distance. The beam diameter is 205.01m at 990m distance. The beam diameter is 207.02m at 1000m distance. The beam diameter is 209.03m at 1010m distance. The beam diameter is 211.04m at 1020m distance. The beam diameter is 213.05m at 1030m distance. The beam diameter is 215.06m at 1040m distance. The beam diameter is 217.07m at 1050m distance. The beam diameter is 219.08m at 1060m distance. The beam diameter is 221.09m at 1070m distance. The beam diameter is 223.10m at 1080m distance. The beam diameter is 225.11m at 1090m distance. The beam diameter is 227.12m at 1100m distance. The beam diameter is 229.13m at 1110m distance. The beam diameter is 231.14m at 1120m distance. The beam diameter is 233.15m at 1130m distance. The beam diameter is 235.16m at 1140m distance. The beam diameter is 237.17m at 1150m distance. The beam diameter is 239.18m at 1160m distance. The beam diameter is 241.19m at 1170m distance. The beam diameter is 243.20m at 1180m distance. The beam diameter is 245.21m at 1190m distance. The beam diameter is 247.22m at 1200m distance. The beam diameter is 249.23m at 1210m distance. The beam diameter is 251.24m at 1220m distance. The beam diameter is 253.25m at 1230m distance. The beam diameter is 255.26m at 1240m distance. The beam diameter is 257.27m at 1250m distance. The beam diameter is 259.28m at 1260m distance. The beam diameter is 261.29m at 1270m distance. The beam diameter is 263.30m at 1280m distance. The beam diameter is 265.31m at 1290m distance. The beam diameter is 267.32m at 1300m distance. The beam diameter is 269.33m at 1310m distance. The beam diameter is 271.34m at 1320m distance. The beam diameter is 273.35m at 1330m distance. The beam diameter is 275.36m at 1340m distance. The beam diameter is 277.37m at 1350m distance. The beam diameter is 279.38m at 1360m distance. The beam diameter is 281.39m at 1370m distance. The beam diameter is 283.40m at 1380m distance. The beam diameter is 285.41m at 1390m distance. The beam diameter is 287.42m at 1400m distance. The beam diameter is 289.43m at 1410m distance. The beam diameter is 291.44m at 1420m distance. The beam diameter is 293.45m at 1430m distance. The beam diameter is 295.46m at 1440m distance. The beam diameter is 297.47m at 1450m distance. The beam diameter is 299.48m at 1460m distance. The beam diameter is 301.49m at 1470m distance. The beam diameter is 303.50m at 1480m distance. The beam diameter is 305.51m at 1490m distance. The beam diameter is 307.52m at 1500m distance. The beam diameter is 309.53m at 1510m distance. The beam diameter is 311.54m at 1520m distance. The beam diameter is 313.55m at 1530m distance. The beam diameter is 315.56m at 1540m distance. The beam diameter is 317.57m at 1550m distance. The beam diameter is 319.58m at 1560m distance. The beam diameter is 321.59m at 1570m distance. The beam diameter is 323.60m at 1580m distance. The beam diameter is 325.61m at 1590m distance. The beam diameter is 327.62m at 1600m distance. The beam diameter is 329.63m at 1610m distance. The beam diameter is 331.64m at 1620m distance. The beam diameter is 333.65m at 1630m distance. The beam diameter is 335.66m at 1640m distance. The beam diameter is 337.67m at 1650m distance. The beam diameter is 339.68m at 1660m distance. The beam diameter is 341.69m at 1670m distance. The beam diameter is 343.70m at 1680m distance. The beam diameter is 345.71m at 1690m distance. The beam diameter is 347.72m at 1700m distance. The beam diameter is 349.73m at 1710m distance. The beam diameter is 351.74m at 1720m distance. The beam diameter is 353.75m at 1730m distance. The beam diameter is 355.76m at 1740m distance. The beam diameter is 357.77m at 1750m distance. The beam diameter is 359.78m at 1760m distance. The beam diameter is 361.79m at 1770m distance. The beam diameter is 363.80m at 1780m distance. The beam diameter is 365.81m at 1790m distance. The beam diameter is 367.82m at 1800m distance. The beam diameter is 369.83m at 1810m distance. The beam diameter is 371.84m at 1820m distance. The beam diameter is 373.85m at 1830m distance. The beam diameter is 375.86m at 1840m distance. The beam diameter is 377.87m at 1850m distance. The beam diameter is 379.88m at 1860m distance. The beam diameter is 381.89m at 1870m distance. The beam diameter is 383.90m at 1880m distance. The beam diameter is 385.91m at 1890m distance. The beam diameter is 387.92m at 1900m distance. The beam diameter is 389.93m at 1910m distance. The beam diameter is 391.94m at 1920m distance. The beam diameter is 393.95m at 1930m distance. The beam diameter is 395.96m at 1940m distance. The beam diameter is 397.97m at 1950m distance. The beam diameter is 399.98m at 1960m distance. The beam diameter is 401.99m at 1970m distance. The beam diameter is 404.00m at 1980m distance. The beam diameter is 406.01m at 1990m distance. The beam diameter is 408.02m at 2000m distance. The beam diameter is 410.03m at 2010m distance. The beam diameter is 412.04m at 2020m distance. The beam diameter is 414.05m at 2030m distance. The beam diameter is 416.06m at 2040m distance. The beam diameter is 418.07m at 2050m distance. The beam diameter is 420.08m at 2060m distance. The beam diameter is 422.09m at 2070m distance. The beam diameter is 424.10m at 2080m distance. The beam diameter is 426.11m at 2090m distance. The beam diameter is 428.12m at 2100m distance. The beam diameter is 430.13m at 2110m distance. The beam diameter is 432.14m at 2120m distance. The beam diameter is 434.15m at 2130m distance. The beam diameter is 436.16m at 2140m distance. The beam diameter is 438.17m at 2150m distance. The beam diameter is 440.18m at 2160m distance. The beam diameter is 442.19m at 2170m distance. The beam diameter is 444.20m at 2180m distance. The beam diameter is 446.21m at 2190m distance. The beam diameter is 448.22m at 2200m distance. The beam diameter is 450.23m at 2210m distance. The beam diameter is 452.24m at 2220m distance. The beam diameter is 454.25m at 2230m distance. The beam diameter is 456.26m at 2240m distance. The beam diameter is 458.27m at 2250m distance. The beam diameter is 460.28m at 2260m distance. The beam diameter is 462.29m at 2270m distance. The beam diameter is 464.30m at 2280m distance. The beam diameter is 466.31m at 2290m distance. The beam diameter is 468.32m at 2300m distance. The beam diameter is 470.33m at 2310m distance. The beam diameter is 472.34m at 2320m distance. The beam diameter is 474.35m at 2330m distance. The beam diameter is 476.36m at 2340m distance. The beam diameter is 478.37m at 2350m distance. The beam diameter is 480.38m at 2360m distance. The beam diameter is 482.39m at 2370m distance. The beam diameter is 484.40m at 2380m distance. The beam diameter is 486.41m at 2390m distance. The beam diameter is 488.42m at 2400m distance. The beam diameter is 490.43m at 2410m distance. The beam diameter is 492.44m at 2420m distance. The beam diameter is 494.45m at 2430m distance. The beam diameter is 496.46m at 2440m distance. The beam diameter is 498.47m at 2450m distance. The beam diameter is 500.48m at 2460m distance. The beam diameter is 502.49m at 2470m distance. The beam diameter is 504.50m at 2480m distance. The beam diameter is 506.51m at 2490m distance. The beam diameter is 508.52m at 2500m distance. The beam diameter is 510.53m at 2510m distance. The beam diameter is 512.54m at 2520m distance. The beam diameter is 514.55m at 2530m distance. The beam diameter is 516.56m at 2540m distance. The beam diameter is 518.57m at 2550m distance. The beam diameter is 520.58m at 2560m distance. The beam diameter is 522.59m at 2570m distance. The beam diameter is 524.60m at 2580m distance. The beam diameter is 526.61m at 2590m distance. The beam diameter is 528.62m at 2600m distance. The beam diameter is 530.63m at 2610m distance. The beam diameter is 532.64m at 2620m distance. The beam diameter is 534.65m at 2630m distance. The beam diameter is 536.66m at 2640m distance. The beam diameter is 538.67m at 2650m distance. The beam diameter is 540.68m at 2660m distance. The beam diameter is 542.69m at 2670m distance. The beam diameter is 544.70m at 2680m distance. The beam diameter is 546.71m at 2690m distance. The beam diameter is 548.72m at 2700m distance. The beam diameter is 550.73m at 2710m distance. The beam diameter is 552.74m at 2720m distance. The beam diameter is 554.75m at 2730m distance. The beam diameter is 556.76m at 2740m distance. The beam diameter is 558.77m at 2750m distance. The beam diameter is 560.78m at 2760m distance. The beam diameter is 562.79m at 2770m distance. The beam diameter is 564.80m at 2780m distance. The beam diameter is 566.81m at 2790m distance. The beam diameter is 568.82m at 2800m distance. The beam diameter is 570.83m at 2810m distance. The beam diameter is 572.84m at 2820m distance. The beam diameter is 574.85m at 2830m distance. The beam diameter is 576.86m at 2840m distance. The beam diameter is 578.87m at 2850m distance. The beam diameter is 580.88m at 2860m distance. The beam diameter is 582.89m at 2870m distance. The beam diameter is 584.90m at 2880m distance. The beam diameter is 586.91m at 2890m distance. The beam diameter is 588.92m at 2900m distance. The beam diameter is 590.93m at 2910m distance. The beam diameter is 592.94m at 2920m distance. The beam diameter is 594.95m at 2930m distance. The beam diameter is 596.96m at 2940m distance. The beam diameter is 598.97m at 2950m distance. The beam diameter is 600.98m at 2960m distance. The beam diameter is 602.99m at 2970m distance. The beam diameter is 605.00m at 2980m distance. The beam diameter is 607.01m at 2990m distance. The beam diameter is 609.02m at 3000m distance. The beam diameter is 611.03m at 3010m distance. The beam diameter is 613.04m at 3020m distance. The beam diameter is 615.05m at 3030m distance. The beam diameter is 617.06m at 3040m distance. The beam diameter is 619.07m at 3050m distance. The beam diameter is 621.08m at 3060m distance. The beam diameter is 623.09m at 3070m distance. The beam diameter is 625.10m at 3080m distance. The beam diameter is 627.11m at 3090m distance. The beam diameter is 629.12m at 3100m distance. The beam diameter is 631.13m at 3110m distance. The beam diameter is 633.14m at 3120m distance. The beam diameter is 635.15m at 3130m distance. The beam diameter is 637.16m at 3140m distance. The beam diameter is 639.17m at 3150m distance. The beam diameter is 641.18m at 3160m distance. The beam diameter is 643.19m at 3170m distance. The beam diameter is 645.20m at 3180m distance. The beam diameter is 647.21m at 3190m distance. The beam diameter is 649.22m at 3200m distance. The beam diameter is 651.23m at 3210m distance. The beam diameter is 653.24m at 3220m distance. The beam diameter is 655.25m at 3230m distance. The beam diameter is 657.26m at 3240m distance. The beam diameter is 659.27m at 3250m distance. The beam diameter is 661.28m at 3260m distance. The beam diameter is 663.29m at 3270m distance. The beam diameter is 665.30m at 3280m distance. The beam diameter is 667.31m at 3290m distance. The beam diameter is 669.32m at 3300m distance. The beam diameter is 671.33m at 3310m distance. The beam diameter is 673.34m at 3320m distance. The beam diameter is 675.35m at 3330m distance. The beam diameter is 677.36m at 3340m distance. The beam diameter is 679.37m at 3350m distance. The beam diameter is 681.38m at 3360m distance. The beam diameter is 683.39m at 3370m distance. The beam diameter is 685.40m at 3380m distance. The beam diameter is 687.41m at 3390m distance. The beam diameter is 689.42m at 3400m distance. The beam diameter is 691.43m at 3410m distance. The beam diameter is 693.44m at 3420m distance. The beam diameter is 695.45m at 3430m distance. The beam diameter is 697.46m at 3440m distance. The beam diameter is 699.47m at 3450m distance. The beam diameter is 701.48m at 3460m distance. The beam diameter is 703.49m at 3470m distance. The beam diameter is 705.50m at 3480m distance. The beam diameter is 707.51m at 3490m distance. The beam diameter is 709.52m at 3500m distance. The beam diameter is 711.53m at 3510m distance. The beam diameter is 713.54m at 3520m distance. The beam diameter is 715.55m at 3530m distance. The beam diameter is 717.56m at 3540m distance. The beam diameter is 719.57m at 3550m distance. The beam diameter is 721.58m at 3560m distance. The beam diameter is 723.59m at 3570m distance. The beam diameter is 725.60m at 3580m distance. The beam diameter is 727.61m at 3590m distance. The beam diameter is 729.62m at 3600m distance. The beam diameter is 731.63m at 3610m distance. The beam diameter is 733.64m at 3620m distance. The beam diameter is 735.65m at 3630m distance. The beam diameter is 737.66m at 3640m distance. The beam diameter is 739.67m at 3650m distance. The beam diameter is 741.68m at 3660m distance. The beam diameter is 743.69m at 3670m distance. The beam diameter is 745.70m at 3680m distance. The beam diameter is 747.71m at 3690m distance. The beam diameter is 749.72m at 3700m distance. The beam diameter is 751.73m at 3710m distance. The beam diameter is 753.74m at 3720m distance. The beam diameter is 755.75m at 3730m distance. The beam diameter is 757.76m at 3740m distance. The beam diameter is 759.77m at 3750m distance. The beam diameter is 761.78m at 3760m distance. The beam diameter is 763.79m at 3770m distance. The beam diameter is 765.80m at 3780m distance. The beam diameter is 767.81m at 3790m distance. The beam diameter is 769.82m at 3800m distance. The beam diameter is 771.83m at 3810m distance. The beam diameter is 773.84m at 3820m distance. The beam diameter is 775.85m at 3830m distance. The beam diameter is 777.86m at 3840m distance. The beam diameter is 779.87m at 3850m distance. The beam diameter is 781.88m at 3860m distance. The beam diameter is 783.89m at 3870m distance. The beam diameter is 785.90m at 3880m distance. The beam diameter is 787.91m at 3890m distance. The beam diameter is 789.92m at 3900m distance. The beam diameter is 791.93m at 3910m distance. The beam diameter is 793.94m at 3920m distance. The beam diameter is 795.95m at 3930m distance. The beam diameter is 797.96m at 3940m distance. The beam diameter is 799.97m at 3950m distance. The beam diameter is 801.98m at 3960m distance. The beam diameter is 803.99m at 3970m distance. The beam diameter is 806.00m at 3980m distance. The beam diameter is 808.01m at 3990m distance. The beam diameter is 810.02m at 4000m distance. The beam diameter is 812.03m at 4010m distance. The beam diameter is 814.04m at 4020m distance. The beam diameter is 816.05m at 4030m distance. The beam diameter is 818.06m at 4040m distance. The beam diameter is 820.07m at 4050m distance. The beam diameter is 822.08m at 4060m distance. The beam diameter is 824.09m at 4070m distance. The beam diameter is 826.10m at 4080m distance. The beam diameter is 828.11m at 4090m distance. The beam diameter is 830.12m at 4100m distance. The beam diameter is 832.13m at 4110m distance. The beam diameter is 834.14m at 4120m distance. The beam diameter is 836.15m at 4130m distance. The beam diameter is 838.16m at 4140m distance. The beam diameter is 840.17m at 4150m distance. The beam diameter is 842.18m at 4160m distance. The beam diameter is 844.19m at 4170m distance. The beam diameter is 846.20m at 4180m distance. The beam diameter is 848.21m at 4190m distance. The beam diameter is 850.22m at 4200m distance. The beam diameter is 852.23m at 4210m distance. The beam diameter is 854.24m at 4220m distance. The beam diameter is 856.25m at 4230m distance. The beam diameter is 858.26m at 4240m distance. The beam diameter is 860.27m at 4250m distance. The beam diameter is 862.28m at 4260m distance. The beam diameter is 864.29m at 4270m distance. The beam diameter is 866.30m at 4280m distance. The beam diameter is 868.31m at 4290m distance. The beam diameter is 870.32m at 4300m distance. The beam diameter is 872.33m at 4310m distance. The beam diameter is 874.34m at 4320m distance. The beam diameter is 876.35m at 4330m distance. The beam diameter is 878.36m at 4340m distance. The beam diameter is 880.37m at 4350m distance. The beam diameter is 882.38m at 4360m distance. The beam diameter is 884.39m at 4370m distance. The beam diameter is 886.40m at 4380m distance. The beam diameter is 888.41m at 4390m distance. The beam diameter is 890.42m at 4400m distance. The beam diameter is 892.43m at 4410m distance. The beam diameter is 894.44m at 4420m distance. The beam diameter is 896.45m at 4430m distance. The beam diameter is 898.46m at 4440m distance. The beam diameter is 900.47m at 4450m distance. The beam diameter is 902.48m at 4460m distance. The beam diameter is 904.49m at 4470m distance. The beam diameter is 906.50m at 4480m distance. The beam diameter is 908.51m at 4490m distance. The beam diameter is 910.52m at 4500m distance. The beam diameter is 912.53m at 4510m distance. The beam diameter is 914.54m at 4520m distance. The beam diameter is 916.55m at 4530m distance. The beam diameter is 918.56m at 4540m distance. The beam diameter is 920.57m at 4550m distance. The beam diameter is 922.58m at 4560m distance. The beam diameter is 924.59m at 4570m distance. The beam diameter is 926.60m at 4580m distance. The beam diameter is 928.61m at 4590m distance. The beam diameter is 930.62m at 4600m distance. The beam diameter is 932.63m at 4610m distance. The beam diameter is 934.64m at 4620m distance. The beam diameter is 936.65m at 4630m distance. The beam diameter is 938.66m at 4640m distance. The beam diameter is 940.67m at 4650m distance. The beam diameter is 942.68m at 4660m distance. The beam diameter is 944.69m at 4670m distance. The beam diameter is 946.70m at 4680m distance. The beam diameter is 948.71m at 4690m distance. The beam diameter is 950.72m at 4700m distance. The beam diameter is 952.73m at 4710m distance. The beam diameter is 954.74m at 4720m distance. The beam diameter is 956.75m at 4730m distance. The beam diameter is 958.76m at 4740m distance. The beam diameter is 960.77m at 4750m distance. The beam diameter is 962.78m at 4760m distance. The beam diameter is 964.79m at 4770m distance. The beam diameter is 966.80m at 4780m distance. The beam diameter is 968.81m at 4790m distance. The beam diameter is 970.82m at 4800m distance. The beam diameter is 972.83m at 4810m distance. The beam diameter is 974.84m at 4820m distance. The beam diameter is 976.85m at 4830m distance. The beam diameter is 978.86m at 4840m distance. The beam diameter is 980.87m at 4850m distance. The beam diameter is 982.88m at 4860m distance. The beam diameter is 984.89m at 4870m distance. The beam diameter is 986.90m at 4880m distance. The beam diameter is 988.91m at 4890m distance. The beam diameter is 990.92m at 4900m distance. The beam diameter is 992.93m at 4910m distance. The beam diameter is 994.94m at 4920m distance. The beam diameter is 996.95m at 4930m distance. The beam diameter is 998.96m at 4940m distance. The beam diameter is 1000.97m at 4950m distance. The beam diameter is 1002.98m at 4960m distance. The beam diameter is 1004.99m at 4970m distance. The beam diameter is 1007.00m at 4980m distance. The beam diameter is 1009.01m at 4990m distance. The beam diameter is 1011.02m at 5000m distance. The beam diameter is 1013.03m at 5010m distance. The beam diameter is 1015.04m at 5020m distance. The beam diameter is 1017.05m at 5030m distance. The beam diameter is 1019.06m at 5040m distance. The beam diameter is 1021.07m at 5050m distance. The beam diameter is 1023.08m at 5060m distance. The beam diameter is 1025.09m at 5070m distance. The beam diameter is 1027.10m at 5080m distance. The beam diameter is 1029.11m at 5090m distance. The beam diameter is 1031.12m at 5100m distance. The beam diameter is 1033.13m at 5110m distance. The beam diameter is 1035.14m at 5120m distance. The beam diameter is 1037.15m at 5130m distance. The beam diameter is 1039.16m at 5140m distance. The beam diameter is 1041.17m at 5150m distance. The beam diameter is 1043.18m at 5160m distance. The beam diameter is 1045.19m at 5170m distance. The beam diameter is 1047.20m at 5180m distance. The beam diameter is 1049.21m at 5190m distance. The beam diameter is 1051.22m at 5200m distance. The beam diameter is 1053.23m at 5210m distance. The beam diameter is 1055.24m at 5220m distance. The beam diameter is 1057.25m at 5230m distance. The beam diameter is 1059.26m at 5240m distance. The beam diameter is 1061.27m at 5250m distance. The beam diameter is 1063.28m at 5260m distance. The beam diameter is 1065.29m at 5270m distance. The beam diameter is 1067.30m at 5280m distance. The beam diameter is 1069.31m at 5290m distance. The beam diameter is 1071.32m at 5300m distance. The beam diameter is 1073.33m at 5310m distance. The beam diameter is 1075.34m at 5320m distance. The beam diameter is 1077.35m at 5330m distance. The beam diameter is 1079.36m at 5340m distance. The beam diameter is 1081.37m at 5350m distance. The beam diameter is 1083.38m at 5360m distance. The beam diameter is 1085.39m at 5370m distance. The beam diameter is 1087.40m at 5380m distance. The beam diameter is 1089.41m at 5390m distance. The beam diameter is 1091.42m at 5400m distance. The beam diameter is 1093.43m at 5410m distance. The beam diameter is 1095.44m at 5420m distance. The beam diameter is 1097.45m at 5430m distance. The beam diameter is 1099.46m at 5440m distance. The beam diameter is 1101.47m at 5450m distance. The beam diameter is 1103.48m at 5460m distance. The beam diameter is 1105.49m at 5470m distance. The beam diameter is 1107.50m at 5480m distance. The beam diameter is 1109.51m at 5490m distance. The beam diameter is 1111.52m at 5500m distance. The beam diameter is 1113.53m at 5510m distance. The beam diameter is 1115.54m at 5520m distance. The beam diameter is 1117.55m at 5530m distance. The beam diameter is 1119.56m at 5540m distance. The beam diameter is 1121.57m at 5550m distance. The beam diameter is 1123.58m at 5560m distance. The beam diameter is 1125.59m at 5570m distance. The beam diameter is 1127.60m at 5580m distance. The beam diameter is 1129.61m at 5590m distance. The beam diameter is 1131.62m at 5600m distance. The beam diameter is 1133.63m at 5610m distance. The beam diameter is 1135.64m at 5620m distance. The beam diameter is 1137.65m at 5630m distance. The beam diameter is 1139.66m at 5640m distance. The beam diameter is 1141.67m at 5650m distance. The beam diameter is 1143.68m at 5660m distance. The beam diameter is 1145.69m at 5670m distance. The beam diameter is 1147.70m at 5680m distance. The beam diameter is 1149.71m at 5690m distance. The beam diameter is 1151.72m at 5700m distance. The beam diameter is 1153.73m at 5710m distance. The beam diameter is 1155.74m at 5720m distance. The beam diameter is 1157.75m at 5730m distance. The beam diameter is 1159.76m at 5740m distance. The beam diameter is 1161.77m at 5750m distance. The beam diameter is 1163.78m at 5760m distance. The beam diameter is 1165.79m at 5770m distance. The beam diameter is 1167.80m at 5780m distance. The beam diameter is 1169.81m at 5790m distance. The beam diameter is 1171.82m at 5800m distance. The beam diameter is 1173.83m at 5810m distance. The beam diameter is 1175.84m at 5820m distance. The beam diameter is 1177.85m at 5830m distance. The beam diameter is 1179.86m at 5840m distance. The beam diameter is 1181.87m at 5850m distance. The beam diameter is 1183.88m at 5860m distance. The beam diameter is 1185.89m at 5870m distance. The beam diameter is 1187.90m at 5

Dati Tecnici

Concept

Proiettore lineare orientabile a LED.

Sorgente

Schede lineari LED Low Power High Efficiency Ra80. 2700K-3500K su richiesta.

Classe di efficienza energetica	D
Potenza nominale	48W
Flusso nominale	7180lm
Indice resa cromatica	80
R _f	82,6
R _g	95,7
CCT nominale	4000K
SDCM	2
Durata utile (L80/B10)	100000h tq +25°C
Durata utile (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato. tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Dati Tecnici

Caratteristiche illuminotecniche

Gruppo ottico interno composto da lente primaria cilindrica in vetro, riflettore in alluminio anodizzato ad alta riflettanza e filtro olografico integrato.

Ottica	Wall Washer
Apertura di fascio	WW
Rendimento ottico	75,2%
Flusso apparecchio	5399lm
Efficienza luminosa	102lm/W
Sicurezza fotobiologica	Conforme al gruppo di rischio basso RG1

Caratteristiche meccaniche

Corpo in alluminio estruso anodizzato 15 μ . Schermo piatto in vetro extrachiaro spessore 4mm. Box driver in policarbonato nero. Corpo dell'apparecchio orientabile e distanziabile dalla superficie di installazione attraverso lo scorrimento delle staffe accessorie lungo apposita guida.

Colore e finitura	Alluminio
Dimensioni	AxBxH 1216x81x82mm
Peso	4,6Kg
Grado di protezione	IP66,IP67
Resistenza meccanica	IK08

Caratteristiche elettriche

Alimentazione DALI integrata. Completo di connettore IP68 per alimentazione. Per installazione in fila continua completare con kit di connettori stagni IP68 (IN-OUT) con sistema di aggancio rapido (1E2769) o con cavo di collegamento completo di connettori 5 poli (1E2762, 1E2763, 1E2764, 1E2765). Apparecchio con linea passante "interna". Apparecchio conforme EN 60598-2-22 per alimentazione da un sistema di emergenza centralizzato CPSS (Central Power Supply System, comunemente chiamato soccorritore), non incorporato nell'apparecchio - escluso aree ad alto rischio. La potenza e il flusso di default sono pari al 100% in AC e al 100% in DC. Apparecchio conforme al CAM per interni - Criteri Ambientali Minimi per edifici pubblici (D.M.24 novembre 2025).

Potenza apparecchio	53W
Alimentazione	220-240Vac 50/60Hz
Classe di isolamento	CLASSE 1
Tipo driver / Controllo	DALI
Driver incluso	SI
SAFE FLICKER	PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158), a garanzia di una luce più confortevole e sicura
Temperatura ambiente	-25°C / +40°C

Installazione

Da completare con staffe di fissaggio fisse o orientabili in acciaio inossidabile. Le staffe possono scorrere lungo il corpo dell'apparecchio per essere posizionate secondo le esigenze dell'installazione.

Note

Sistema di controllo Casambi disponibile tramite accessorio. Adotta la soluzione tecnica "Waterblock Smart" che prevede la resinatura dei cavi di collegamento, limitando il rischio di risalita dell'umidità verso il driver o l'apparecchio. Disponibile su richiesta in versione 110-277Vac. Commissioning del sistema di regolazione tramite APP gratuita; l'intervento di un tecnico specializzato può essere quotato su richiesta.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A.: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato. tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Dati Tecnici

Garanzia

5 anni.

Avvertenze

Apparecchio progettato per essere smaltito/riciclato a fine vita. Sorgente luminosa (solo LED) sostituibile da un professionista. Alimentatore sostituibile da un professionista.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Codici a completamento

Sistema di fissaggio

**CODICE****1E2752**

Staffa corta per installazione a parete (2 pezzi).

**CODICE****1E2753**

Staffa lunga per installazione a parete (2 pezzi).

**CODICE****1E2754**

Staffa per installazione a plafone (2 pezzi).

Accessori

Tappi di chiusura

**CODICE****1E2761**

Tappo di chiusura comprensivo di staffa per installazione a plafone.

Pannello di copertura

**CODICE****1E3047****L**

1216mm

Copertura laterale per installazione a plafone.

**CODICE****1E2757****L**

1216mm

Copertura laterale per installazione a parete/cornicione.

**CODICE****1E2760****L**

1216mm

Copertura laterale anti-abbagliamento.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Accessori

Cavo



CODICE	L
1E2762	320mm
1E2763	470mm
1E2764	620mm
1E2765	770mm

Cavo di collegamento.
Completo di connettori 5 poli.
Per versione ON-OFF e DALI.

1E2762 - Per collegare in linea e adiacenti un proiettore da 600mm con uno da 900mm.
1E2763 - Per collegare in linea e adiacenti un proiettore da 600mm con uno da 1200mm o due proiettori da 900mm.
1E2764 - Per collegare in linea e adiacenti un proiettore da 900mm con uno da 1200mm.
1E2765 - Per collegare in linea e adiacenti due proiettori da 1200mm.

Connettore



CODICE
1E2769

Box di connessione lineare IP66/IP68.
5 poli, di sezione max 1,5mm².
Diametro del cavo da 7 a 12mm.

Sistemi di controllo



CODICE
1E3048

Unità di controllo wireless IP67 con interfaccia DALI.
Genera un bus DALI2 locale e ciò rende possibile la connessione diretta ad un driver LED con interfaccia DALI.
Il modulo può essere usato solo in un sistema chiuso e non può essere connesso ad una rete DALI esistente.
Il modulo è controllato in modalità wireless tramite applicazione Casambi per smartphone e tablet attraverso tecnologia Bluetooth 5.0.
I dispositivi creano automaticamente una rete mesh wireless adattiva, robusta ed affidabile permettendo di gestire in maniera semplice ed efficiente un numero elevato di apparecchi. L'unità di controllo è preimpostata con profilo DALI 1CH, ovvero il dispositivo è in grado di controllare un singolo driver DALI con comandi broadcast.
Oltre a DALI broadcast, sono disponibili anche altre modalità di funzionamento, come:

- Pulsante (normalmente aperto)
- Unità di controllo 0/1-10V
- Unità di controllo DALI Tunable White DT8
- Sensore di presenza

Se diverso dalla modalità preimpostata, il profilo di funzionamento desiderato deve essere impostato direttamente dall'utente prima dell'accoppiamento dell'unità di controllo alla rete Casambi.
LxHxP=108x28x65mm.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italia

Tel: +39 055 37911
targetti.com
targetti@targetti.com

A motivo dell'evoluzione tecnologica dei componenti elettronici i dati indicati sono soggetti ad aggiornamento e quindi deve essere richiesta conferma in fase d'ordine.
Flusso luminoso e potenza elettrica presentano tolleranze di +/-10% rispetto al valore indicato, tq +25°C (CIE 121).

Si riserva la facoltà di apportare modifiche tecniche.

Accessori

Sistemi di controllo



CODICE

1E4369

Extender IP67: unità di controllo wireless per driver LED con interfaccia di dimmerazione DALI basata su tecnologia Casambi. Dispone di una uscita DALI2 tramite la quale si possono controllare fino a 40 apparecchi di illuminazione.

Con l'aggiunta di un ulteriore alimentatore BUS DALI esterno è possibile comandare fino a 64 apparecchi.

Extender IP67 è preimpostato sul profilo DALI broadcast, ovvero tutti gli apparecchi collegati ad esso sono dimmerabili allo stesso livello.


Oltre al DALI broadcast, sono disponibili altre modalità di funzionamento, come:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

Se diverso dalla modalità preimpostata, il profilo di funzionamento desiderato deve essere impostato direttamente dall'utente prima dell'accoppiamento dell'extender alla rete Casambi.

LxHxP=148x40x150mm.

Scaricatore di sovratensione



CODICE

A013A

Scaricatore di sovratensione compatibile con tutti gli apparecchi di illuminazione in CLASSE I.

Tensione di funzionamento 230-277Vac.

SPD type 2+3.

Tensione massima di scarica 10kV.

CLASSE I

IP67



CODICE

A013C

Scaricatore di sovratensione compatibile con tutti gli apparecchi di illuminazione in CLASSE I.

Compatibile con linea dati DALI, DMX e 0-10V.

Tensione di funzionamento 230Vac.

SPD type 2+3.

Tensione massima di scarica 10kV.

CLASSE I

IP20