


LIGHTING SYSTEMS

Oz Lighting module - Multiple - Large 3x - 50x150mm

Code
2T0096CA

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
3000K 90	FL 27°	17.8W 1787lm
POWER SUPPLY CONTROL	COLOUR	
48Vdc	○	

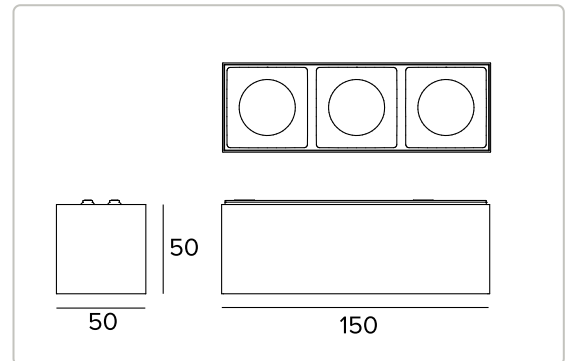

The figures on the drawing are expressed in mm.



		<table><tr><th>3000K</th><th>H(m)</th><th>D(m)</th><th colspan="2">E_{max}(lx)</th></tr><tr><td>Ra90</td><td></td><td>27°</td><td colspan="2"></td></tr><tr><td>Fixture Power</td><td>18W</td><td>1</td><td>0.49</td><td>5853</td></tr><tr><td>Source Flux</td><td>2389lm</td><td>2</td><td>0.98</td><td>1463</td></tr><tr><td>Fixture Flux</td><td>1787lm</td><td>3</td><td>1.47</td><td>650</td></tr><tr><td>Efficacy</td><td>100lm/W</td><td>4</td><td>1.95</td><td>366</td></tr></table>				3000K	H(m)	D(m)	E _{max} (lx)		Ra90		27°			Fixture Power	18W	1	0.49	5853	Source Flux	2389lm	2	0.98	1463	Fixture Flux	1787lm	3	1.47	650	Efficacy	100lm/W	4	1.95	366
3000K	H(m)	D(m)	E _{max} (lx)																																
Ra90		27°																																	
Fixture Power	18W	1	0.49	5853																															
Source Flux	2389lm	2	0.98	1463																															
Fixture Flux	1787lm	3	1.47	650																															
Efficacy	100lm/W	4	1.95	366																															
TS1836	I _{max} =2450cd/klm	I _{max}	5853cd	5	2.44	234																													

Technical Data

Concept

Fixed multiple magnetic LED light modules, powered at low voltage.

Source

High efficiency Chip on Board LED Ra90.

Energy efficiency class	D
Nominal power	16W
Nominal flux	2389lm
Colour rendering index	90
R _f	92
R _g	101
CCT nominal	3000K
SDCM	2
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

The flood optical system consists of a metallised polycarbonate precision optic, a holographic diffuser filter and a black polycarbonate frame. The light is suitable for installation in work environments UGR<19 (EN12464-1).

Optic	FL
Beam angles	FL
Optical efficiency	74.8%
Fixture flux	1787lm
Luminous efficacy	100lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

White painted die-cast aluminium body. Multiple fixed light, 150x50mm.

Colour and finish	Plaster white
Dimensions	AxBxH 150x50x50mm
Weight	0.21Kg
Version	3X CASAMBI
Degree of protection	IP20

Electrical characteristics

Fixture Power	17.8W
Power supply	48Vdc
Insulation Class	CLASS 3
Ambient temperature	0°C / +25°C

Installation

Extremely rapid, versatile and simple mechanical and electrical coupling system using magnets which support the fixture on the Power Track and feed power inside the fixture on all versions.

Notes

Integrated Casambi control system (Casambi Ready). DALI control system available using a special accessory. 110-277Vac version available on request.

Warranty

5 years.