PROJECTORS


Jedi Projector - L. 1216mm



Code
1E2628

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 80	FL 32°	53W 5365lm

POWER SUPPLY CONTROL	COLOUR
220-240Vac DALI	

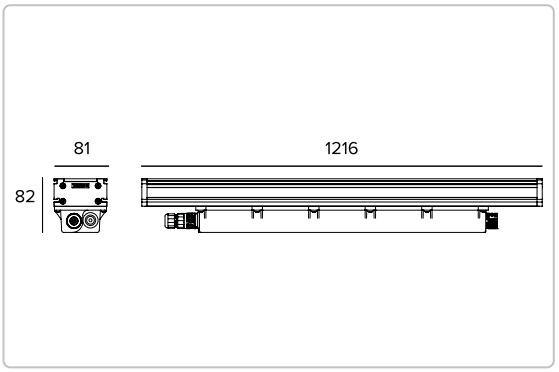

The figures on the drawing are expressed in mm.

4.6 IP66 IP67 IK08 CE



4000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			32°	85°	
Fixture Power	53W	1	0.57	1.84	5022
Source Flux	7180lm	2	1.14	3.68	1255
Fixture Flux	5365lm	3	1.70	5.53	558
Efficacy	101lm/W	4	2.27	7.37	314
Imax	5022cd	5	2.84	9.21	201

Technical Data

Concept

Adjustable linear LED projector.

Source

Linear Low Power High Efficiency LED board Ra80. 2700K-3500K on request.	
Energy efficiency class	D
Nominal power	48W
Nominal flux	7180lm
Colour rendering index	80
Rf	82.6
Rg	95.7
CCT nominal	4000K
SDCM	2
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	59000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Internal optical system composed of a primary cylindrical glass lens, a high reflectance anodised aluminium reflector and an integrated holographic filter.

Optic	FL
Beam angles	FL
Optical efficiency	74.72%
Fixture flux	5365lm
Luminous efficacy	101lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Extruded anodised aluminium 15µ body. Extra clear 4mm thick glass flat screen. Black polycarbonate driver box. The body of the fixture is adjustable and can be installed away from the mounting surface by sliding the brackets along a special guide.

Colour and finish	Aluminium
Dimensions	AxBxH 1216x81x82mm
Weight	4.6Kg
Degree of protection	IP66,IP67
Mechanical Resistance	IK08

Electrical characteristics

DALI version with an integrated power supply. Complete with IP68 connector for power supply. To be completed with a watertight IP68 (IN-OUT) connector kit with a quick installation system (1E2769) or with a connection cable complete with 5 pin connector (1E2762, 1E2763, 1E2764, 1E2765) for in-line installations. Fixture with "internal" wire feedthrough. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power	53W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	DALI
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +40°C

Installation

To be completed with stainless steel fixed or adjustable brackets. The brackets can slide along the body of the fixture to be positioned according to installation needs.

Notes

Casambi control system available using a dedicated accessory. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Regulations and Certifications

CE

Technical Data

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes


Mounting System



CODE

1E2752


Short bracket for wall installation (2 pieces).



CODE

1E2753

Long bracket for wall installation (2 pieces).




CODE

1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps




CODE

1E2761


End cap with bracket for ceiling installation included.

Cover Panel




CODE	L
1E3047	1216mm

Side cover for ceiling installation.



CODE	L
1E2757	1216mm

Side cover for wall/cornice installation.



CODE	L
1E2760	1216mm

Anti-glare side cover.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656


Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Cable



CODE	L
1E2762	320mm
1E2763	470mm
1E2764	620mm
1E2765	770mm

Connection cable.
Complete with 5 pole connectors.
For the ON-OFF and DALI version.

1E2762 - For in line adjacent connection of one 600mm projector with one 900mm projector.
1E2763 - For in line adjacent connection of one 600mm projector with one 1200mm projector or two 900mm projectors.
1E2764 - For in line adjacent connection of one 900mm projector with one 1200mm projector.
1E2765 - For in line adjacent connection of two 1200mm projectors.

Connector



CODE
1E2769

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.

Control systems



CODE
1E3048

IP67 wireless control unit with DALI interface.
It generates a local DALI2 bus, enhabling a direct connection to a DALI interface LED driver.
The module can only be used in a closed system and cannot be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.
The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.
The control unit is preset to the DALI 1CH profile, maning the device can control a single DALI driver with broadcast commands.
In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.
LxHxP=108x28x65mm.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.



CODE


1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.
It has a DALI2 output with the capacity to control up to 40 lighting fixtures.
With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.
IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.
In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.
LxHxP=148x40x150mm.

Surge protector



CODE

A013A

Surge protector compatible with CLASS I lighting fixtures.
Operating voltage 230-277Vac.
SPD type 2+3.
Max surge protection 10kV.
CLASS I
IP67



CODE

A013C

Surge protector compatible with CLASS I lighting fixtures.
DALI, DMX, 0-10V datalines compliance.
Operating voltage 230Vac.
SPD type 2+3.
Max surge protection 10kV.
CLASS I
IP20

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.