


**Ceiling, Suspensions and Wall**

# **SLIM Wall**

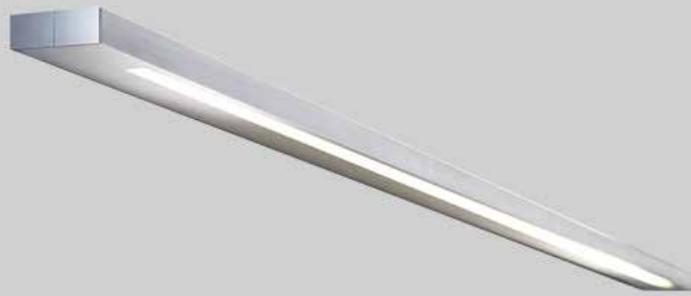

**TARGETTI**

# SLIM

## Wall mounted

### GENERAL INFO

Indirect or direct/indirect modular wall mounted luminaire for LED sources.  
638x26x80  
1238x26x80

### LED

Linear LED boards Low Power High efficiency  
From 1720lm to 6880lm  
3000K  
Ra80

### PRODUCT EFFICACY

Up to 112lm/W

### OPTICS

VWFL

### POWER SUPPLY

Electronic

### MATERIAL

Body made of extruded anodised aluminium. Polycarbonate lateral end caps. Lower diffusive screen made of ribbed, extruded opal polycarbonate. Transparent polycarbonate upper safety screen.

### ON DEMAND



4000K

Compact size minimal modular applique with indirect/direct light emission that disappears into its surroundings leaving space for the architecture and light only.

Also available in a modular system suspension version or stand-alone.



Design Daniel Bernard

Indoor

# SLIM



Wall  
L. 638mm



## LED / 12W / INDIRECT / VWFL



		3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
		Ra80		117°	115°		
Fixture Power	14W	1	3.27	3.12	546		
Source Flux	1720lm	2	6.53	6.25	137		
Fixture Flux	1562lm	3	9.80	9.37	61		
Efficacy	112lm/W	4	13.07	12.49	34		
TS751	I <sub>max</sub> =318cd/klm	I <sub>max</sub>	547cd	5	16.34	15.62	22

Driver	Colour	3000K
EL.	●	<b>1T4192</b>

## LED / 24W / DIRECT/INDIRECT / VWFL




		3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
		Ra80		88°	95°		
Fixture Power	28W	1	1.91	2.19	501		
Source Flux	3440lm	2	3.83	4.38	125		
Fixture Flux	2566lm	3	5.74	6.56	56		
Efficacy	92lm/W	4	7.66	8.75	31		
TS752	I <sub>max</sub> =147cd/klm	I <sub>max</sub>	504cd	5	9.57	10.94	20

Driver	Colour	3000K
EL.	●	<b>1T4193</b>



Wall  
L. 1238mm



## LED / 24W / INDIRECT / VWFL



		3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
		Ra80		117°	115°		
Fixture Power	28W	1	3.27	3.12	1092		
Source Flux	3440lm	2	6.53	6.25	273		
Fixture Flux	3124lm	3	9.80	9.37	121		
Efficacy	112lm/W	4	13.07	12.49	68		
TS751	I <sub>max</sub> =318cd/klm	I <sub>max</sub>	1095cd	5	16.34	15.62	44

Driver	Colour	3000K
EL.	●	<b>1T4194</b>

## LED / 48W / DIRECT/INDIRECT / VWFL



		3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
		Ra80		88°	95°		
Fixture Power	56W	1	1.91	2.19	1002		
Source Flux	6880lm	2	3.83	4.38	250		
Fixture Flux	5133lm	3	5.74	6.56	111		
Efficacy	92lm/W	4	7.66	8.75	63		
TS752	I <sub>max</sub> =147cd/klm	I <sub>max</sub>	1009cd	5	9.57	10.94	40

Driver	Colour	3000K
EL.	●	<b>1T4195</b>

## Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

## Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.

## Consorzio ecolight

Targetti Sankey Spa is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.

The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium. The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.



### TARGETTI SANKEY SpA

Certificated ISO 9001 n° 9130. TAR1  
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

## Light beam apertures

from	to	beam	
5°	10°	Narrow Spot	<b>NSP</b>
11°	25°	Spot	<b>SP</b>
26°	40°	Flood	<b>FL</b>
41°	50°	Medium Wide Flood	<b>MWFL</b>
51°	70°	Wide Flood	<b>WFL</b>
71°	120°	Very Wide Flood	<b>VWFL</b>
		Wall Washer	<b>WW</b>
		Narrow Asymmetric	<b>N. ASYM</b>
		Asymmetric	<b>ASYM</b>

## Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

## Particular symbols

	Weight of the single fixture.
	Cable length.
	Walk-over.
	Driver-over safe.
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
<b>DBS</b>	Dynamic Beam Shaper optical technology with remote management of the beam opening.
	LED with Ra__ where not present in the catalogue, available on request.
	Different colour temperatures available on request.
	Custom finish of your choice from the Targetti Colours range and RAL indicated in the colour chart can be downloaded on line from the download section.
	Treatment carried out on request.
	Supplied on request with an integrated or remote 110-277Vac power supply as indicated for the standard model.
	LED version with a different "Tunable White" tone available on request.

### Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

