


APPLIQUES

Label 6 - Paroi

Code
1T9942DA

TEMPÉRATURE DE COULEUR	DISTRIBUTION LUMINEUSE	OUTPUT
3000K 90	MWFL 45°	9,5W 879lm
ALIMENTATION CONTRÔLE	COULEUR	
220-240Vac DALI		

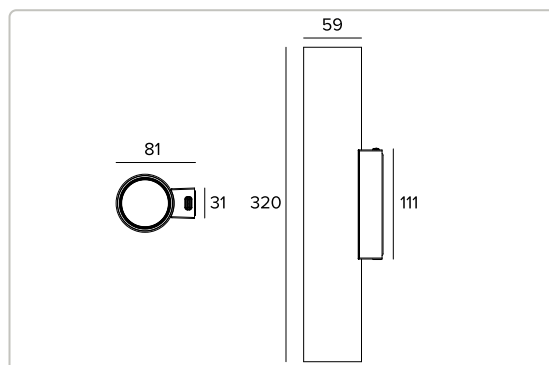

Les données sur le dessin sont exprimées en mm.



The diagram illustrates the light distribution of a fixture. It shows a beam angle of 45 degrees, with a maximum illuminance of 1619 lx at a distance of 1m. The beam diameter at 1m is 0.84m. The beam diameter at 2m is 1.68m, and at 3m it is 2.52m. The beam diameter at 4m is 3.35m, and at 5m it is 4.19m. The beam diameter at 6m is 4.97m. The beam diameter at 7m is 5.78m, and at 8m it is 6.56m. The beam diameter at 9m is 7.32m, and at 10m it is 8.07m. The beam diameter at 11m is 8.81m, and at 12m it is 9.55m. The beam diameter at 13m is 10.28m, and at 14m it is 11.01m. The beam diameter at 15m is 11.73m, and at 16m it is 12.45m. The beam diameter at 17m is 13.19m, and at 18m it is 13.87m. The beam diameter at 19m is 14.65m, and at 20m it is 15.29m. The beam diameter at 21m is 16.11m, and at 22m it is 16.71m. The beam diameter at 23m is 17.57m, and at 24m it is 18.13m. The beam diameter at 25m is 18.63m, and at 26m it is 19.55m. The beam diameter at 27m is 20.09m, and at 28m it is 20.97m. The beam diameter at 29m is 21.55m, and at 30m it is 22.39m. The beam diameter at 31m is 22.61m, and at 32m it is 23.81m. The beam diameter at 33m is 24.07m, and at 34m it is 25.23m. The beam diameter at 35m is 25.13m, and at 36m it is 26.65m. The beam diameter at 37m is 26.19m, and at 38m it is 28.07m. The beam diameter at 39m is 27.25m, and at 40m it is 29.49m. The beam diameter at 41m is 28.31m, and at 42m it is 30.91m. The beam diameter at 43m is 29.37m, and at 44m it is 32.33m. The beam diameter at 45m is 30.43m, and at 46m it is 33.75m. The beam diameter at 47m is 31.49m, and at 48m it is 35.17m. The beam diameter at 49m is 32.55m, and at 50m it is 36.59m. The beam diameter at 51m is 33.61m, and at 52m it is 38.01m. The beam diameter at 53m is 34.67m, and at 54m it is 39.43m. The beam diameter at 55m is 35.73m, and at 56m it is 40.85m. The beam diameter at 57m is 36.79m, and at 58m it is 42.27m. The beam diameter at 59m is 37.85m, and at 60m it is 43.69m. The beam diameter at 61m is 38.91m, and at 62m it is 45.11m. The beam diameter at 63m is 39.97m, and at 64m it is 46.53m. The beam diameter at 65m is 41.03m, and at 66m it is 47.95m. The beam diameter at 67m is 42.09m, and at 68m it is 49.37m. The beam diameter at 69m is 43.15m, and at 70m it is 50.79m. The beam diameter at 71m is 44.21m, and at 72m it is 52.21m. The beam diameter at 73m is 45.27m, and at 74m it is 53.63m. The beam diameter at 75m is 46.33m, and at 76m it is 55.05m. The beam diameter at 77m is 47.39m, and at 78m it is 56.47m. The beam diameter at 79m is 48.45m, and at 80m it is 57.89m. The beam diameter at 81m is 49.51m, and at 82m it is 59.31m. The beam diameter at 83m is 50.57m, and at 84m it is 60.73m. The beam diameter at 85m is 51.63m, and at 86m it is 62.15m. The beam diameter at 87m is 52.69m, and at 88m it is 63.57m. The beam diameter at 89m is 53.75m, and at 90m it is 64.99m. The beam diameter at 91m is 54.81m, and at 92m it is 66.41m. The beam diameter at 93m is 55.87m, and at 94m it is 67.83m. The beam diameter at 95m is 56.93m, and at 96m it is 69.25m. The beam diameter at 97m is 57.99m, and at 98m it is 70.67m. The beam diameter at 99m is 59.05m, and at 100m it is 72.09m. The beam diameter at 101m is 60.11m, and at 102m it is 73.51m. The beam diameter at 103m is 61.17m, and at 104m it is 74.93m. The beam diameter at 105m is 62.23m, and at 106m it is 76.35m. The beam diameter at 107m is 63.29m, and at 108m it is 77.77m. The beam diameter at 109m is 64.35m, and at 110m it is 79.19m. The beam diameter at 111m is 65.41m, and at 112m it is 80.61m. The beam diameter at 113m is 66.47m, and at 114m it is 82.03m. The beam diameter at 115m is 67.53m, and at 116m it is 83.45m. The beam diameter at 117m is 68.59m, and at 118m it is 84.87m. The beam diameter at 119m is 69.65m, and at 120m it is 86.29m. The beam diameter at 121m is 70.71m, and at 122m it is 87.71m. The beam diameter at 123m is 71.77m, and at 124m it is 89.13m. The beam diameter at 125m is 72.83m, and at 126m it is 90.55m. The beam diameter at 127m is 73.89m, and at 128m it is 91.97m. The beam diameter at 129m is 74.95m, and at 130m it is 93.39m. The beam diameter at 131m is 76.01m, and at 132m it is 94.81m. The beam diameter at 133m is 77.07m, and at 134m it is 96.23m. The beam diameter at 135m is 78.13m, and at 136m it is 97.65m. The beam diameter at 137m is 79.19m, and at 138m it is 99.07m. The beam diameter at 139m is 80.25m, and at 140m it is 100.49m. The beam diameter at 141m is 81.31m, and at 142m it is 101.91m. The beam diameter at 143m is 82.37m, and at 144m it is 103.33m. The beam diameter at 145m is 83.43m, and at 146m it is 104.75m. The beam diameter at 147m is 84.49m, and at 148m it is 106.17m. The beam diameter at 149m is 85.55m, and at 150m it is 107.59m. The beam diameter at 151m is 86.61m, and at 152m it is 109.01m. The beam diameter at 153m is 87.67m, and at 154m it is 110.43m. The beam diameter at 155m is 88.73m, and at 156m it is 111.85m. The beam diameter at 157m is 89.79m, and at 158m it is 113.27m. The beam diameter at 159m is 90.85m, and at 160m it is 114.69m. The beam diameter at 161m is 91.91m, and at 162m it is 116.11m. The beam diameter at 163m is 92.97m, and at 164m it is 117.53m. The beam diameter at 165m is 94.03m, and at 166m it is 118.95m. The beam diameter at 167m is 95.09m, and at 168m it is 120.37m. The beam diameter at 169m is 96.15m, and at 170m it is 121.79m. The beam diameter at 171m is 97.21m, and at 172m it is 123.21m. The beam diameter at 173m is 98.27m, and at 174m it is 124.63m. The beam diameter at 175m is 99.33m, and at 176m it is 126.05m. The beam diameter at 177m is 100.39m, and at 178m it is 127.47m. The beam diameter at 179m is 101.45m, and at 180m it is 128.89m. The beam diameter at 181m is 102.51m, and at 182m it is 130.31m. The beam diameter at 183m is 103.57m, and at 184m it is 131.73m. The beam diameter at 185m is 104.63m, and at 186m it is 133.15m. The beam diameter at 187m is 105.69m, and at 188m it is 134.57m. The beam diameter at 189m is 106.75m, and at 190m it is 135.99m. The beam diameter at 191m is 107.81m, and at 192m it is 137.41m. The beam diameter at 193m is 108.87m, and at 194m it is 138.83m. The beam diameter at 195m is 109.93m, and at 196m it is 140.25m. The beam diameter at 197m is 110.99m, and at 198m it is 141.67m. The beam diameter at 199m is 112.05m, and at 200m it is 143.09m. The beam diameter at 201m is 113.11m, and at 202m it is 144.51m. The beam diameter at 203m is 114.17m, and at 204m it is 145.93m. The beam diameter at 205m is 115.23m, and at 206m it is 147.35m. The beam diameter at 207m is 116.29m, and at 208m it is 148.77m. The beam diameter at 209m is 117.35m, and at 210m it is 150.19m. The beam diameter at 211m is 118.41m, and at 212m it is 151.61m. The beam diameter at 213m is 119.47m, and at 214m it is 153.03m. The beam diameter at 215m is 120.53m, and at 216m it is 154.45m. The beam diameter at 217m is 121.59m, and at 218m it is 155.87m. The beam diameter at 219m is 122.65m, and at 220m it is 157.29m. The beam diameter at 221m is 123.71m, and at 222m it is 158.71m. The beam diameter at 223m is 124.77m, and at 224m it is 160.13m. The beam diameter at 225m is 125.83m, and at 226m it is 161.55m. The beam diameter at 227m is 126.89m, and at 228m it is 162.97m. The beam diameter at 229m is 127.95m, and at 230m it is 164.39m. The beam diameter at 231m is 129.01m, and at 232m it is 165.81m. The beam diameter at 233m is 130.07m, and at 234m it is 167.23m. The beam diameter at 235m is 131.13m, and at 236m it is 168.65m. The beam diameter at 237m is 132.19m, and at 238m it is 170.07m. The beam diameter at 239m is 133.25m, and at 240m it is 171.49m. The beam diameter at 241m is 134.31m, and at 242m it is 172.91m. The beam diameter at 243m is 135.37m, and at 244m it is 174.33m. The beam diameter at 245m is 136.43m, and at 246m it is 175.75m. The beam diameter at 247m is 137.49m, and at 248m it is 177.17m. The beam diameter at 249m is 138.55m, and at 250m it is 178.59m. The beam diameter at 251m is 139.61m, and at 252m it is 180.01m. The beam diameter at 253m is 140.67m, and at 254m it is 181.43m. The beam diameter at 255m is 141.73m, and at 256m it is 182.85m. The beam diameter at 257m is 142.79m, and at 258m it is 184.27m. The beam diameter at 259m is 143.85m, and at 260m it is 185.69m. The beam diameter at 261m is 144.91m, and at 262m it is 187.11m. The beam diameter at 263m is 145.97m, and at 264m it is 188.53m. The beam diameter at 265m is 147.03m, and at 266m it is 189.95m. The beam diameter at 267m is 148.09m, and at 268m it is 191.37m. The beam diameter at 269m is 149.15m, and at 270m it is 192.79m. The beam diameter at 271m is 150.21m, and at 272m it is 194.21m. The beam diameter at 273m is 151.27m, and at 274m it is 195.63m. The beam diameter at 275m is 152.33m, and at 276m it is 197.05m. The beam diameter at 277m is 153.39m, and at 278m it is 198.47m. The beam diameter at 279m is 154.45m, and at 280m it is 199.89m. The beam diameter at 281m is 155.51m, and at 282m it is 201.31m. The beam diameter at 283m is 156.57m, and at 284m it is 202.73m. The beam diameter at 285m is 157.63m, and at 286m it is 204.15m. The beam diameter at 287m is 158.69m, and at 288m it is 205.57m. The beam diameter at 289m is 159.75m, and at 290m it is 206.99m. The beam diameter at 291m is 160.81m, and at 292m it is 208.41m. The beam diameter at 293m is 161.87m, and at 294m it is 209.83m. The beam diameter at 295m is 162.93m, and at 296m it is 211.25m. The beam diameter at 297m is 163.99m, and at 298m it is 212.67m. The beam diameter at 299m is 165.05m, and at 300m it is 214.09m. The beam diameter at 301m is 166.11m, and at 302m it is 215.51m. The beam diameter at 303m is 167.17m, and at 304m it is 216.93m. The beam diameter at 305m is 168.23m, and at 306m it is 218.35m. The beam diameter at 307m is 169.29m, and at 308m it is 219.77m. The beam diameter at 309m is 170.35m, and at 310m it is 221.19m. The beam diameter at 311m is 171.41m, and at 312m it is 222.61m. The beam diameter at 313m is 172.47m, and at 314m it is 224.03m. The beam diameter at 315m is 173.53m, and at 316m it is 225.45m. The beam diameter at 317m is 174.59m, and at 318m it is 226.87m. The beam diameter at 319m is 175.65m, and at 320m it is 228.29m. The beam diameter at 321m is 176.71m, and at 322m it is 229.71m. The beam diameter at 323m is 177.77m, and at 324m it is 231.13m. The beam diameter at 325m is 178.83m, and at 326m it is 232.55m. The beam diameter at 327m is 179.89m, and at 328m it is 233.97m. The beam diameter at 329m is 180.95m, and at 330m it is 235.39m. The beam diameter at 331m is 182.01m, and at 332m it is 236.81m. The beam diameter at 333m is 183.07m, and at 334m it is 238.23m. The beam diameter at 335m is 184.13m, and at 336m it is 239.65m. The beam diameter at 337m is 185.19m, and at 338m it is 241.07m. The beam diameter at 339m is 186.25m, and at 340m it is 242.49m. The beam diameter at 341m is 187.31m, and at 342m it is 243.91m. The beam diameter at 343m is 188.37m, and at 344m it is 245.33m. The beam diameter at 345m is 189.43m, and at 346m it is 246.75m. The beam diameter at 347m is 190.49m, and at 348m it is 248.17m. The beam diameter at 349m is 191.55m, and at 350m it is 249.59m. The beam diameter at 351m is 192.61m, and at 352m it is 251.01m. The beam diameter at 353m is 193.67m, and at 354m it is 252.43m. The beam diameter at 355m is 194.73m, and at 356m it is 253.85m. The beam diameter at 357m is 195.79m, and at 358m it is 255.27m. The beam diameter at 359m is 196.85m, and at 360m it is 256.69m. The beam diameter at 361m is 197.91m, and at 362m it is 258.11m. The beam diameter at 363m is 198.97m, and at 364m it is 259.53m. The beam diameter at 365m is 200.03m, and at 366m it is 260.95m. The beam diameter at 367m is 201.09m, and at 368m it is 262.37m. The beam diameter at 369m is 202.15m, and at 370m it is 263.79m. The beam diameter at 371m is 203.21m, and at 372m it is 265.21m. The beam diameter at 373m is 204.27m, and at 374m it is 266.63m. The beam diameter at 375m is 205.33m, and at 376m it is 268.05m. The beam diameter at 377m is 206.39m, and at 378m it is 269.47m. The beam diameter at 379m is 207.45m, and at 380m it is 270.89m. The beam diameter at 381m is 208.51m, and at 382m it is 272.31m. The beam diameter at 383m is 209.57m, and at 384m it is 273.73m. The beam diameter at 385m is 210.63m, and at 386m it is 275.15m. The beam diameter at 387m is 211.69m, and at 388m it is 276.57m. The beam diameter at 389m is 212.75m, and at 390m it is 277.99m. The beam diameter at 391m is 213.81m, and at 392m it is 279.41m. The beam diameter at 393m is 214.87m, and at 394m it is 280.83m. The beam diameter at 395m is 215.93m, and at 396m it is 282.25m. The beam diameter at 397m is 216.99m, and at 398m it is 283.67m. The beam diameter at 399m is 218.05m, and at 400m it is 285.09m. The beam diameter at 401m is 219.11m, and at 402m it is 286.51m. The beam diameter at 403m is 220.17m, and at 404m it is 287.93m. The beam diameter at 405m is 221.23m, and at 406m it is 289.35m. The beam diameter at 407m is 222.29m, and at 408m it is 290.77m. The beam diameter at 409m is 223.35m, and at 410m it is 292.19m. The beam diameter at 411m is 224.41m, and at 412m it is 293.61m. The beam diameter at 413m is 225.47m, and at 414m it is 295.03m. The beam diameter at 415m is 226.53m, and at 416m it is 296.45m. The beam diameter at 417m is 227.59m, and at 418m it is 297.87m. The beam diameter at 419m is 228.65m, and at 420m it is 299.29m. The beam diameter at 421m is 229.71m, and at 422m it is 300.71m. The beam diameter at 423m is 230.77m, and at 424m it is 302.13m. The beam diameter at 425m is 231.83m, and at 426m it is 303.55m. The beam diameter at 427m is 232.89m, and at 428m it is 304.97m. The beam diameter at 429m is 233.95m, and at 430m it is 306.39m. The beam diameter at 431m is 235.01m, and at 432m it is 307.81m. The beam diameter at 433m is 236.07m, and at 434m it is 309.23m. The beam diameter at 435m is 237.13m, and at 436m it is 310.65m. The beam diameter at 437m is 238.19m, and at 438m it is 312.07m. The beam diameter at 439m is 239.25m, and at 440m it is 313.49m. The beam diameter at 441m is 240.31m, and at 442m it is 314.91m. The beam diameter at 443m is 241.37m, and at 444m it is 316.33m. The beam diameter at 445m is 242.43m, and at 446m it is 317.75m. The beam diameter at 447m is 243.49m, and at 448m it is 319.17m. The beam diameter at 449m is 244.55m, and at 450m it is 320.59m. The beam diameter at 451m is 245.61m, and at 452m it is 322.01m. The beam diameter at 453m is 246.67m, and at 454m it is 323.43m. The beam diameter at 455m is 247.73m, and at 456m it is 324.85m. The beam diameter at 457m is 248.79m, and at 458m it is 326.27m. The beam diameter at 459m is 249.85m, and at 460m it is 327.69m. The beam diameter at 461m is 250.91m, and at 462m it is 329.11m. The beam diameter at 463m is 251.97m, and at 464m it is 330.53m. The beam diameter at 465m is 253.03m, and at 466m it is 331.95m. The beam diameter at 467m is 254.09m, and at 468m it is 333.37m. The beam diameter at 469m is 255.15m, and at 470m it is 334.79m. The beam diameter at 471m is 256.21m, and at 472m it is 336.21m. The beam diameter at 473m is 257.27m, and at 474m it is 337.63m. The beam diameter at 475m is 258.33m, and at 476m it is 339.05m. The beam diameter at 477m is 259.39m, and at 478m it is 340.47m. The beam diameter at 479m is 260.45m, and at 480m it is 341.89m. The beam diameter at 481m is 261.51m, and at 482m it is 343.31m. The beam diameter at 483m is 262.57m, and at 484m it is 344.73m. The beam diameter at 485m is 263.63m, and at 486m it is 346.15m. The beam diameter at 487m is 264.69m, and at 488m it is 347.57m. The beam diameter at 489m is 265.75m, and at 490m it is 348.99m. The beam diameter at 491m is 266.81m, and at 492m it is 350.41m. The beam diameter at 493m is 267.87m, and at 494m it is 351.83m. The beam diameter at 495m is 268.93m, and at 496m it is 353.25m. The beam diameter at 497m is 269.99m, and at 498m it is 354.67m. The beam diameter at 499m is 271.05m, and at 500m it is 356.09m. The beam diameter at 501m is 272.11m, and at 502m it is 357.51m. The beam diameter at 503m is 273.17m, and at 504m it is 358.93m. The beam diameter at 505m is 274.23m, and at 506m it is 360.35m. The beam diameter at 507m is 275.29m, and at 508m it is 361.77m. The beam diameter at 509m is 276.35m, and at 510m it is 363.19m. The beam diameter at 511m is 277.41m, and at 512m it is 364.61m. The beam diameter at 513m is 278.47m, and at 514m it is 366.03m. The beam diameter at 515m is 279.53m, and at 516m it is 367.45m. The beam diameter at 517m is 280.59m, and at 518m it is 368.87m. The beam diameter at 519m is 281.65m, and at 520m it is 370.29m. The beam diameter at 521m is 282.71m, and at 522m it is 371.71m. The beam diameter at 523m is 283.77m, and at 524m it is 373.13m. The beam diameter at 525m is 284.83m, and at 526m it is 374.55m. The beam diameter at 527m is 285.89m, and at 528m it is 375.97m. The beam diameter at 529m is 286.95m, and at 530m it is 377.39m. The beam diameter at 531m is 288.01m, and at 532m it is 378.81m. The beam diameter at 533m is 289.07m, and at 534m it is 380.23m. The beam diameter at 535m is 290.13m, and at 536m it is 381.65m. The beam diameter at 537m is 291.19m, and at 538m it is 383.07m. The beam diameter at 539m is 292.25m, and at 540m it is 384.49m. The beam diameter at 541m is 293.31m, and at 542m it is 385.91m. The beam diameter at 543m is 294.37m, and at 544m it is 387.33m. The beam diameter at 545m is 295.43m, and at 546m it is 388.75m. The beam diameter at 547m is 296.49m, and at 548m it is 390.17m. The beam diameter at 549m is 297.55m, and at 550m it is 391.59m. The beam diameter at 551m is 298.61m, and at 552m it is 393.01m. The beam diameter at 553m is 299.67m, and at 554m it is 394.43m. The beam diameter at 555m is 300.73m, and at 556m it is 395.85m. The beam diameter at 557m is 301.79m, and at 558m it is 397.27m. The beam diameter at 559m is 302.85m, and at 560m it is 398.69m. The beam diameter at 561m is 303.91m, and at 562m it is 400.11m. The beam diameter at 563m is 304.97m, and at 564m it is 401.53m. The beam diameter at 565m is 306.03m, and at 566m it is 402.95m. The beam diameter at 567m is 307.09m, and at 568m it is 404.37m. The beam diameter at 569m is 308.15m, and at 570m it is 405.79m. The beam diameter at 571m is 309.21m, and at 572m it is 407.21m. The beam diameter at 573m is 310.27m, and at 574m it is 408.63m. The beam diameter at 575m is 311.33m, and at 576m it is 410.05m. The beam diameter at 577m is 312.39m, and at 578m it is 411.47m. The beam diameter at 579m is 313.45m, and at 580m it is 412.89m. The beam diameter at 581m is 314.51m, and at 582m it is 414.31m. The beam diameter at 583m is 315.57m, and at 584m it is 415.73m. The beam diameter at 585m is 316.63m, and at 586m it is 417.15m. The beam diameter at 587m is 317.69m, and at 588m it is 418.57m. The beam diameter at 589m is 318.75m, and at 590m it is 419.99m. The beam diameter at 591m is 319.81m, and at 592m it is 421.41m. The beam diameter at 593m is 320.87m, and at 594m it is 422.83m. The beam diameter at 595m is 321.93m, and at 596m it is 424.25m. The beam diameter at 597m is 322.99m, and at 598m it is 425.67m. The beam diameter at 599m is 324.05m, and at 600m it is 427.09m. The beam diameter at 601m is 325.11m, and at 602m it is 428.51m. The beam diameter at 603m is 326.17m, and at 604m it is 429.93m. The beam diameter at 605m is 327.23m, and at 606m it is 431.35m. The beam diameter at 607m is 328.29m, and at 608m it is 432.77m. The beam diameter at 609m is 329.35m, and at 610m it is 434.19m. The beam diameter at 611m is 330.41m, and at 612m it is 435.61m. The beam diameter at 613m is 331.47m, and at 614m it is 437.03m. The beam diameter at 615m is 332.53m, and at 616m it is 438.45m. The beam diameter at 617m is 333.59m, and at 618m it is 439.87m. The beam diameter at 619m is 334.65m, and at 620m it is 441.29m. The beam diameter at 621m is 335.71m, and at 622m it is 442.71m. The beam diameter at 623m is 336.77m, and at 624m it is 444.13m. The beam diameter at 625m is 337.83m, and at 626m it is 445.55m. The beam diameter at 627m is 338.89m, and at 628m it is 446.97m. The beam diameter at 629m is 339.95m, and at 630m it is 448.39m. The beam diameter at 631m is 341.01m, and at 632m it is 449.81m. The beam diameter at 633m is 342.07m, and at 634m it is 451.23m. The beam diameter at 635m is 343.13m, and at 636m it is 452.65m. The beam diameter at 637m is 344.19m, and at 638m it is 454.07m. The beam diameter at 639m is 345.25m, and at 640m it is 455.49m. The beam diameter at 641m is 346.31m, and at 642m it is 456.91m. The beam diameter at 643m is 347.37m, and at 644m it is 458.33m. The beam diameter at 645m is 348.43m, and at 646m it is 459.75m. The beam diameter at 647m is 349.49m, and at 648m it is 461.17m. The beam diameter at 649m is 350.55m, and at 650m it is 462.59m. The beam diameter at 651m is 351.61m, and at 652m it is 464.01m. The beam diameter at 653m is 352.67m, and at 654m it is 465.43m. The beam diameter at 655m is 353.73m, and at 656m it is 466.85m. The beam diameter at 657m is 354.79m, and at 658m it is 468.27m. The beam diameter at 659m is 355.85m, and at 660m it is 469.69m. The beam diameter at 661m is 356.91m, and at 662m it is 471.11m. The beam diameter at 663m is 357.97m, and at 664m it is 472.53m. The beam diameter at 665m is 359.03m, and at 666m it is 473.95m. The beam diameter at 667m is 360.09m, and at 668m it is 475.37m. The beam diameter at 669m is 361.15m, and at 670m it is 476.79m. The beam diameter at 671m is 362.21m, and at 672m it is 478.21m. The beam diameter at 673m is 363.27m, and at 674m it is 479.63m. The beam diameter at 675m is 364.33m, and at 676m it is 481.05m. The beam diameter at 677m is 365.39m, and at 678m it is 482.47m. The beam diameter at 679m is 366.45m, and at 680m it is 483.89m.

Données techniques

Concept

Applique pour sources LED à emission directe alimenté par tension de reseau.

Source

LED Chip on Board haute efficacité Ra90. 2700K-3500K en option.

La classe d'efficacité énergétique du produit	D
Puissance nominale	8,3W
Flux nominal	1182lm
Indice de rendu des couleurs	90
Rf	92
Rg	101
CCT nominale	3000K
Durée utile (L80/B10)	72000h tq +25°C
Durée utile (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel : +39 055 37911
targetti.com
targetti@targetti.com

En raison de l'évolution technologique des composants électroniques, les données indiquées peuvent subir des mises à jour ; il faut donc demander confirmation à la commande.
Le flux lumineux et la puissance électrique présentent des tolérances de +/-10% par rapport à la valeur indiquée. tq +25°C (CIE 121).

Nous réservons le droit d'apporter des modifications techniques.

Données techniques

Caractéristiques de l'éclairage

Version MWFL - optique de précision à facettes convexes en aluminium anodisé spéculaire, filtre holographique diffuseur et anneau cut-off en silicone noir.

Émission	Directe
Optique	MWFL
Ouverture du faisceau	MWFL
Rendement optique	74,33%
Flux appareil	879lm
Efficacité lumineuse	92lm/W
Sécurité photobiologique	Conforme au groupe RG1 (Risque faible)

Caractéristiques mécaniques

Corps cylindrique en aluminium usiné obtenu par un procédé d'extrusion et revêtu d'une peinture en poudre.

Couleur et finition	Noir profond
Dimensions	ØxH 59x320mm
Poids	0,81Kg
Degré de protection	IP20

Caractéristiques électriques

Version DALI avec alimentation intégrée à l'intérieur du luminaire. Luminaire conforme à la norme EN 60598-2-22 pour l'alimentation électrique à partir d'un système de secours centralisé CPSS (Central Power Supply System), non intégrés au luminaire - zones à haut risque exclues. La puissance et le flux par défaut sont de 100% en AC et de 100% en DC.

Puissance installée	9,5W
Alimentation	220-240Vac 50/60Hz
Classe d'isolation	CLASSE 2
Type de driver / Contrôle	DALI - PUSH
Driver inclus	OUI
SAFE FLICKER	PstLM=<1 et SVM=<0,4 (IEC TR 61547-1 et IEC TR 63158), pour garantir une lumière plus confortable et sans danger
Température ambiante	0°C / +25°C

Installation

Kit avec plaque de fixation pour installation au mur déjà inclus dans le produit.

Notes

Mise en service du système de contrôle par APP gratuit ; l'intervention d'un technicien spécialisé peut faire l'objet d'un devis sur demande.

Garantie

5 années.

Mise en garde

Luminaire conçu pour l'élimination/recyclage en fin de vie. Source lumineuse (LED uniquement) remplaçable par un professionnel. Boîtier de commande remplaçable par un professionnel.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel : +39 055 37911
targetti.com
targetti@targetti.com

En raison de l'évolution technologique des composants électroniques, les données indiquées peuvent subir des mises à jour ; il faut donc demander confirmation à la commande.
Le flux lumineux et la puissance électrique présentent des tolérances de +/-10% par rapport à la valeur indiquée. tq +25°C (CIE 121).

Nous réservons le droit d'apporter des modifications techniques.

Accessoires

Systèmes de contrôle



CODE

1T5349

Unité de commande sans fil IP20 avec interface DALI.

Il génère un bus DALI2 local, permettant une connexion directe à un driver LED à interface DALI.

Le module peut être utilisé uniquement dans un système fermé et ne peut être connecté à un réseau DALI déjà existant.

Le module est contrôlé sans fil à travers l'application Casambi pour smartphone et tablette via la technologie Bluetooth 5.0.

Les appareils créent automatiquement un réseau maillé sans fil adaptatif, robuste et fiable, permettant une gestion simple et efficace d'un grand nombre d'appareils.

L'unité de contrôle est pré-réglée sur le profil DALI 1CH, ce qui permet à l'appareil de contrôler un seul Driver DALI avec des commandes broadcast.

En plus du DALI broadcast, d'autres modes de fonctionnement sont disponibles, tels que :

- Bouton poussoir (normalement ouvert)
- Unité de contrôle 0/1-10V
- Unité de commande DALI Tunable White DT8
- Détecteur de présence

S'il est différent du mode prédéfini, le profil de fonctionnement souhaité doit être défini directement par l'utilisateur avant de coupler la centrale au réseau Casambi.

LxHxP=102x25x36mm.



CODE

2T0131

IP20 Extender pour le contrôle sans fil du driver LED avec interface de gradation DALI (ou 1-10V) basée sur la technologie Casambi.

Il dispose d'une sortie DALI2 avec la capacité de contrôler jusqu'à 40 luminaires.

Avec l'ajout d'une autre alimentation externe BUS DALI, il est possible de contrôler jusqu'à 64 appareils.

IP20 Extender est pré-réglé sur le profil DALI broadcast, ce qui signifie que tous les luminaires qui y sont connectés sont dimmables au même niveau.

En plus de la diffusion DALI broadcast d'autres modes de fonctionnement sont disponibles, tels que :

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

S'il est différent du mode prédéfini, le profil de fonctionnement souhaité doit être défini directement par l'utilisateur avant de coupler le répéteur au réseau Casambi.

LxHxP=130x22x30mm.