

PROJECTORS


Jedi Projector RGBW

- L. 916mm

Code

1E4252

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
RGBW	FL 35°	41.3W 2023lm
POWER SUPPLY CONTROL	COLOUR	
220-240Vac DMX RDM		

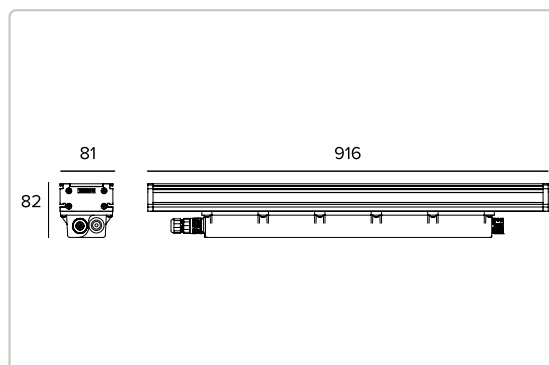

The figures on the drawing are expressed in mm.

The fixture's photometric values
can be found on the following pages



Technical Data

Concept

Powerful adjustable linear RGBW LED projector.

Source

LED Multichip RGBW module with white 3000K.

Energy efficiency class	G
Nominal power	33W
Nominal flux	See photometries
Colour rendering index	
CCT nominal	See photometries
SDCM	2
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Internal optical system composed of a primary cylindrical glass lens, a high reflectance anodised aluminium reflector and an integrated holographic filter.

Optic	FL
Beam angles	FL
Optical efficiency	75.19%
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Extruded anodised aluminium 15μ body. Extra clear 4mm thick glass flat screen. Black polycarbonate driver box. The body of the fixture is adjustable and can be installed away from the mounting surface by sliding the brackets along a special guide.

Colour and finish	Aluminium
Dimensions	AxBxH 916x81x82mm
Weight	4.5Kg
Degree of protection	IP66,IP67
Mechanical Resistance	IK08

Electrical characteristics

Integrated electronic power supply. Controlled using DMX-RDM protocols that allow to programme the fixture remotely (no dip-switch) using the DMX data line. Pass-through power supply with 1 meter cable and 3-pole IP68 connectors. Pass-through DMX line connection with 5-pole IP68 panel connectors. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory.

Fixture Power	See photometries
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	DMX RDM
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	-25°C / +35°C

Installation

To be completed with stainless steel fixed or adjustable brackets. The brackets can slide along the body of the fixture to be positioned according to installation needs.

Notes

LMS Casambi wireless control available on request. Photometrics show the maximum emission values of fixtures. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request.

Warranty

5 years.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656







Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^{\circ}\text{C}$ (CIE 121).


We reserve the right to make technical changes.

Photometries

RGBW	Fixture Power	41.3W		<table><tr><td>-</td><td></td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td></td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>41W</td><td>1</td><td>0.63</td><td>1.94</td><td>1752</td></tr><tr><td>Source Flux</td><td>2691lm</td><td>2</td><td>1.26</td><td>3.88</td><td>438</td></tr><tr><td>Fixture Flux</td><td>2023lm</td><td>3</td><td>1.90</td><td>5.81</td><td>195</td></tr><tr><td>Efficacy</td><td>49lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>109</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>1752cd</td><td>5</td><td>3.16</td><td>9.69</td><td>70</td></tr></table>						-		H(m)	D1(m)	D2(m)	Emax(lx)	-		35°	88°			Fixture Power	41W	1	0.63	1.94	1752	Source Flux	2691lm	2	1.26	3.88	438	Fixture Flux	2023lm	3	1.90	5.81	195	Efficacy	49lm/W	4	2.53	7.75	109	TS1771	Imax=651cd/klm	Imax	1752cd	5	3.16	9.69	70
	-			H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-			35°	88°																																																
	Fixture Power	41W		1	0.63	1.94	1752																																														
	Source Flux	2691lm		2	1.26	3.88	438																																														
Fixture Flux	2023lm	3	1.90	5.81	195																																																
Efficacy	49lm/W	4	2.53	7.75	109																																																
TS1771	Imax=651cd/klm	Imax	1752cd	5	3.16	9.69	70																																														
Nominal flux	2691lm																																																				
Fixture flux	2023lm																																																				
Luminous efficacy	49lm/W																																																				
RGB	Fixture Power	29.7W		<table><tr><td>-</td><td></td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td></td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>30W</td><td>1</td><td>0.63</td><td>1.94</td><td>998</td></tr><tr><td>Source Flux</td><td>1533lm</td><td>2</td><td>1.26</td><td>3.88</td><td>249</td></tr><tr><td>Fixture Flux</td><td>1153lm</td><td>3</td><td>1.90</td><td>5.81</td><td>111</td></tr><tr><td>Efficacy</td><td>39lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>62</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>998cd</td><td>5</td><td>3.16</td><td>9.69</td><td>40</td></tr></table>						-		H(m)	D1(m)	D2(m)	Emax(lx)	-		35°	88°			Fixture Power	30W	1	0.63	1.94	998	Source Flux	1533lm	2	1.26	3.88	249	Fixture Flux	1153lm	3	1.90	5.81	111	Efficacy	39lm/W	4	2.53	7.75	62	TS1771	Imax=651cd/klm	Imax	998cd	5	3.16	9.69	40
	-			H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-			35°	88°																																																
	Fixture Power	30W		1	0.63	1.94	998																																														
	Source Flux	1533lm		2	1.26	3.88	249																																														
Fixture Flux	1153lm	3	1.90	5.81	111																																																
Efficacy	39lm/W	4	2.53	7.75	62																																																
TS1771	Imax=651cd/klm	Imax	998cd	5	3.16	9.69	40																																														
Nominal flux	1533lm																																																				
Fixture flux	1153lm																																																				
Luminous efficacy	39lm/W																																																				
WHITE	CCT nominal	3000K		<table><tr><td></td><td>3000K</td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td>-</td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>11W</td><td>1</td><td>0.63</td><td>1.94</td><td>853</td></tr><tr><td>Source Flux</td><td>1311lm</td><td>2</td><td>1.26</td><td>3.88</td><td>213</td></tr><tr><td>Fixture Flux</td><td>986lm</td><td>3</td><td>1.90</td><td>5.81</td><td>95</td></tr><tr><td>Efficacy</td><td>92lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>53</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>853cd</td><td>5</td><td>3.16</td><td>9.69</td><td>34</td></tr></table>							3000K	H(m)	D1(m)	D2(m)	Emax(lx)	-	-	35°	88°			Fixture Power	11W	1	0.63	1.94	853	Source Flux	1311lm	2	1.26	3.88	213	Fixture Flux	986lm	3	1.90	5.81	95	Efficacy	92lm/W	4	2.53	7.75	53	TS1771	Imax=651cd/klm	Imax	853cd	5	3.16	9.69	34
		3000K		H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-	-		35°	88°																																																
	Fixture Power	11W		1	0.63	1.94	853																																														
	Source Flux	1311lm		2	1.26	3.88	213																																														
Fixture Flux	986lm	3	1.90	5.81	95																																																
Efficacy	92lm/W	4	2.53	7.75	53																																																
TS1771	Imax=651cd/klm	Imax	853cd	5	3.16	9.69	34																																														
Fixture Power	10.7W																																																				
Nominal flux	1311lm																																																				
Fixture flux	986lm																																																				
Luminous efficacy	92lm/W																																																				
RED	Fixture Power	8W		<table><tr><td>-</td><td></td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td></td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>8W</td><td>1</td><td>0.63</td><td>1.94</td><td>307</td></tr><tr><td>Source Flux</td><td>471lm</td><td>2</td><td>1.26</td><td>3.88</td><td>77</td></tr><tr><td>Fixture Flux</td><td>354lm</td><td>3</td><td>1.90</td><td>5.81</td><td>34</td></tr><tr><td>Efficacy</td><td>44lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>19</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>307cd</td><td>5</td><td>3.16</td><td>9.69</td><td>12</td></tr></table>						-		H(m)	D1(m)	D2(m)	Emax(lx)	-		35°	88°			Fixture Power	8W	1	0.63	1.94	307	Source Flux	471lm	2	1.26	3.88	77	Fixture Flux	354lm	3	1.90	5.81	34	Efficacy	44lm/W	4	2.53	7.75	19	TS1771	Imax=651cd/klm	Imax	307cd	5	3.16	9.69	12
	-			H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-			35°	88°																																																
	Fixture Power	8W		1	0.63	1.94	307																																														
	Source Flux	471lm		2	1.26	3.88	77																																														
Fixture Flux	354lm	3	1.90	5.81	34																																																
Efficacy	44lm/W	4	2.53	7.75	19																																																
TS1771	Imax=651cd/klm	Imax	307cd	5	3.16	9.69	12																																														
Nominal flux	471lm																																																				
Fixture flux	354lm																																																				
Luminous efficacy	44lm/W																																																				
GREEN	Fixture Power	11.1W		<table><tr><td>-</td><td></td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td></td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>11W</td><td>1</td><td>0.63</td><td>1.94</td><td>629</td></tr><tr><td>Source Flux</td><td>966lm</td><td>2</td><td>1.26</td><td>3.88</td><td>157</td></tr><tr><td>Fixture Flux</td><td>726lm</td><td>3</td><td>1.90</td><td>5.81</td><td>70</td></tr><tr><td>Efficacy</td><td>65lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>39</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>629cd</td><td>5</td><td>3.16</td><td>9.69</td><td>25</td></tr></table>						-		H(m)	D1(m)	D2(m)	Emax(lx)	-		35°	88°			Fixture Power	11W	1	0.63	1.94	629	Source Flux	966lm	2	1.26	3.88	157	Fixture Flux	726lm	3	1.90	5.81	70	Efficacy	65lm/W	4	2.53	7.75	39	TS1771	Imax=651cd/klm	Imax	629cd	5	3.16	9.69	25
	-			H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-			35°	88°																																																
	Fixture Power	11W		1	0.63	1.94	629																																														
	Source Flux	966lm		2	1.26	3.88	157																																														
Fixture Flux	726lm	3	1.90	5.81	70																																																
Efficacy	65lm/W	4	2.53	7.75	39																																																
TS1771	Imax=651cd/klm	Imax	629cd	5	3.16	9.69	25																																														
Nominal flux	966lm																																																				
Fixture flux	726lm																																																				
Luminous efficacy	65lm/W																																																				
BLUE	Fixture Power	10.9W		<table><tr><td>-</td><td></td><td>H(m)</td><td>D1(m)</td><td>D2(m)</td><td>Emax(lx)</td></tr><tr><td>-</td><td></td><td>35°</td><td>88°</td><td></td><td></td></tr><tr><td>Fixture Power</td><td>11W</td><td>1</td><td>0.63</td><td>1.94</td><td>123</td></tr><tr><td>Source Flux</td><td>189lm</td><td>2</td><td>1.26</td><td>3.88</td><td>31</td></tr><tr><td>Fixture Flux</td><td>142lm</td><td>3</td><td>1.90</td><td>5.81</td><td>14</td></tr><tr><td>Efficacy</td><td>13lm/W</td><td>4</td><td>2.53</td><td>7.75</td><td>8</td></tr><tr><td>TS1771</td><td>Imax=651cd/klm</td><td>Imax</td><td>123cd</td><td>5</td><td>3.16</td><td>9.69</td><td>5</td></tr></table>						-		H(m)	D1(m)	D2(m)	Emax(lx)	-		35°	88°			Fixture Power	11W	1	0.63	1.94	123	Source Flux	189lm	2	1.26	3.88	31	Fixture Flux	142lm	3	1.90	5.81	14	Efficacy	13lm/W	4	2.53	7.75	8	TS1771	Imax=651cd/klm	Imax	123cd	5	3.16	9.69	5
	-			H(m)	D1(m)	D2(m)	Emax(lx)																																														
	-			35°	88°																																																
	Fixture Power	11W		1	0.63	1.94	123																																														
	Source Flux	189lm		2	1.26	3.88	31																																														
Fixture Flux	142lm	3	1.90	5.81	14																																																
Efficacy	13lm/W	4	2.53	7.75	8																																																
TS1771	Imax=651cd/klm	Imax	123cd	5	3.16	9.69	5																																														
Nominal flux	189lm																																																				
Fixture flux	142lm																																																				
Luminous efficacy	13lm/W																																																				

Related codes


Mounting System



CODE

1E2752


Short bracket for wall installation (2 pieces).



CODE

1E2753

Long bracket for wall installation (2 pieces).




CODE

1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps




CODE

1E2761

End cap with bracket for ceiling installation included.

Cover Panel




CODE

1E3046

L

916mm

Side cover for ceiling installation.




CODE

1E2756

L

916mm

Side cover for wall/cornice installation.



CODE

1E2759

L

916mm

Anti-glare side cover.

Accessories

Connector



CODE

1E2769

Linear connection box IP66/IP68.
5 poles max. wire section 1.5mm².
Cable diameter range from 7 to 12mm.



CODE

1E3184

IP68 4-way cable connector (5 pole).

Control systems



CODE

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



CODE

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



CODE

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Surge protector



CODE

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.