

WALL RECESSED LUMINAIRES

SURFACE LUMINAIRES


BOLLARDS

# Zedge Pro

Code

**1E3210DA90**

| LIGHT COLOUR         | LIGHT DISTRIBUTION                                                                | OUTPUT             |
|----------------------|-----------------------------------------------------------------------------------|--------------------|
| 2700K<br>90          | Floor Washer                                                                      | 15.6W<br>384-573lm |
| POWER SUPPLY CONTROL | COLOUR                                                                            |                    |
| 220-240Vac<br>DALI   |  |                    |

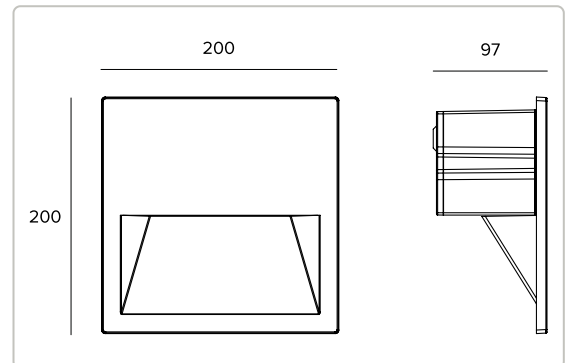

The figures on the drawing are expressed in mm.

The fixture's photometric values  
can be found on the following pages



## Technical Data

## Concept

Recessed wall mounted LED fixture.

## Source

2 high efficiency Ra90 LED Chip on Board.

|                         |                 |
|-------------------------|-----------------|
| Energy efficiency class | E               |
| Nominal power           | 14W             |
| Nominal flux            | 1672lm          |
| Colour rendering index  | 90              |
| Rf                      | 92              |
| Rg                      | 99              |
| CCT nominal             | 2700K           |
| SDCM                    | 2               |
| Lifetime (L80/B10)      | 72000h tq +25°C |
| Lifetime (L90/B10)      | 72000h tq +25°C |

# TARGETTI

CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656

Targetti Sankey S.r.l.  
Via Giuseppe Garibaldi, 82  
50041 Calenzano (FI)  
Italy

Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

### Illuminotechnical characteristics

The internal optical system is composed of 2 metallised polycarbonate reflectors coupled to two high reflectance anodised aluminium reflectors and holographic filters. Louver screen in silk-screen printed extra-clear glass. ADJUSTABLE version - that allows to change from one beam to the other in a uniform way by adjusting the 2 optical systems.

|                                            |                                   |
|--------------------------------------------|-----------------------------------|
| Optic                                      | Floor Washer                      |
| Optical efficiency                         | See photometries                  |
| Fixture flux                               | See photometries                  |
| Luminous efficacy                          | See photometries                  |
| Photobiological safety                     | Compliant with RG1 low risk group |
| BUG rating in compliance with IES TM 15 07 | B=0 U=0 G=0                       |

### Mechanical characteristics

The body of the fixture and the external frame are made of powder coated die-cast anodised aluminium.

|                       |                    |
|-----------------------|--------------------|
| Colour and finish     | Ferrite            |
| Dimensions            | AxBxH 200x200x97mm |
| Weight                | 2.35Kg             |
| Version               | Adjustable         |
| Degree of protection  | IP66               |
| Mechanical Resistance | IK10               |

### Electrical characteristics

Complete with a dimmable DALI power supply. Pre-cabled with a 1m HO7RN-F (4x1mm<sup>2</sup>) cable. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

|                          |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| Fixture Power            | 15.6W                                                                                                |
| Power supply             | 220-240Vac 50/60Hz                                                                                   |
| Insulation Class         | CLASS 2                                                                                              |
| Type of driver / Control | DALI - PUSH                                                                                          |
| Driver included          | YES                                                                                                  |
| SAFE FLICKER             | PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light |
| Ambient temperature      | -25°C / +35°C                                                                                        |

### Installation

To be completed with a special nylon outer casing fitted for parallel connection.

### Notes

Designed in collaboration with Gensler. Casambi control system available using a dedicated accessory. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

### Warranty

5 years.

# TARGETTI

CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656

Targetti Sankey S.r.l.  
Via Giuseppe Garibaldi, 82  
50041 Calenzano (FI)  
Italy

Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Technical Data

## Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.  
Replaceable control gear by a professional.

# TARGETTI

CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656

Targetti Sankey S.r.l.  
Via Giuseppe Garibaldi, 82  
50041 Calenzano (FI)  
Italy

Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Photometries

DEEP WW

|                    |        |
|--------------------|--------|
| Fixture flux       | 573lm  |
| Luminous efficacy  | 37lm/W |
| Optical efficiency | 34.27% |




WIDE WW

|                    |        |
|--------------------|--------|
| Fixture flux       | 384lm  |
| Luminous efficacy  | 25lm/W |
| Optical efficiency | 22.98% |



## Related codes

## Insertion Box




## CODE

1E3219

Nylon outer casing fitted for parallel connection with feed through-wiring.  
 AxBxH=207x207x114.5mm.  
 For flush or overlay installation.

## Carter



## CODE


1E3440

## COLOUR



Plate accessory for wall mounted installation.  
 Powder coated anodised aluminium.  
 AxBxH=201x201x107mm.

## Bollard



## CODE

1E3437

## COLOUR



## H

400mm

## KG

3.5Kg

1E3438



800mm

5.8Kg

1E3439



1000mm

7Kg

Powder coated anodised aluminium bollard.

## Mounting System



## CODE

1E3450

Fixing rods for installation in concrete.  
 AISI 316 stainless steel.  
 H=147mm.  
 0.36Kg.

For Zedge Pro Bollard installation with pole 1E3437, 1E3438, 1E3439.

## Accessories

## Connector



## CODE

1E2769

Linear connection box IP66/IP68.  
 5 poles max. wire section 1.5mm².  
 Cable diameter range from 7 to 12mm.



## CODE

1E2494

Multiple connection box IP68.  
 1 IN - 3 OUT 4 poles max. wire section 2.5mm².  
 Cable diameter range from 6 to 12mm.

# TARGETTI

CCIAA Firenze  
 Share Capital: € 500.000,00  
 VAT N. (IT): 01537660480  
 R.E.A: FI-275656

Targetti Sankey S.r.l.  
 Via Giuseppe Garibaldi, 82  
 50041 Calenzano (FI)  
 Italy

Tel: +39 055 37911  
 targetti.com  
 targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Accessories

### Tool



#### CODE

**1E3305**

Tightening wrench for the connector kit.

### Control systems



#### CODE

**1E3048**

IP67 wireless control unit with DALI interface.

It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.

The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.

The control unit is preset to the DALI TCH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.

LxHxP=108x28x65mm.



#### CODE

**1E4369**

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.


In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.

LxHxP=148x40x150mm.

### Surge protector



#### CODE

**A013B**

Surge protector compatible with CLASS II lighting fixtures and electronic drivers.

Operating voltage 220-240Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS II

IP67


CCIAA Firenze  
Share Capital: € 500.000,00  
VAT N. (IT): 01537660480  
R.E.A: FI-275656Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

## Accessories

## Surge protector



### CODE

**A013D**

Surge protector compatible with CLASS II lighting fixtures.  
DALI, DMX, 0-10V datalines compliance.  
Operating voltage 230-277Vac.  
SPD type 2+3.  
Max surge protection 10kV.  
CLASS II  
IP65