



LIGHTING SYSTEMS

Fortyeight Label 4 - Fix

Code

1T9870EL

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
2700K 90	MWFL 42°	7.1W 680lm
POWER SUPPLY CONTROL	COLOUR	
48Vdc		

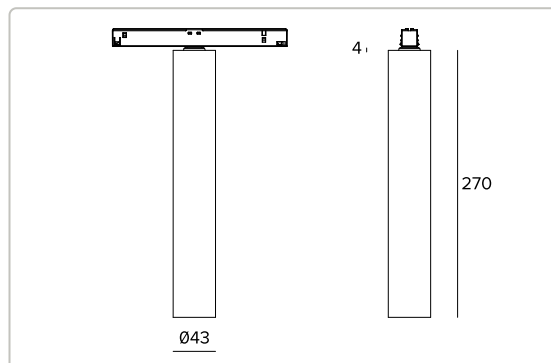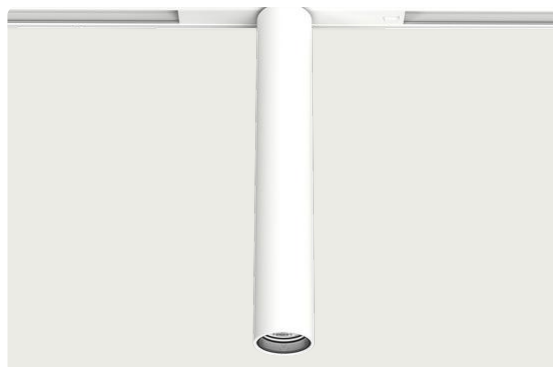

The figures on the drawing are expressed in mm.



The diagram shows a light beam with a 42° angle. At a distance of 1m, the illuminance is 1621 cd/klm. At 2m, it is 405 cd/klm. At 3m, it is 227 cd/klm. At 4m, it is 162 cd/klm. At 5m, it is 129 cd/klm. The beam diameter at 5m is 3.80m.

	2700K	H(m)	D(m)	E _{max} (lx)	
Ra90			42°		
Fixture Power	7W	1	0.76	1491	
Source Flux	920lm	2	1.52	373	
Fixture Flux	680lm	3	2.28	166	
Efficacy	96lm/W	4	3.04	93	
TS1965	Imax=1621cd/klm	Imax	1491cd	5	3.80

Technical Data

Concept

Professional low voltage LED fixture for direct lighting.

Source

High efficiency Chip on Board LED Ra90. 3500K on request.

Energy efficiency class	E
Nominal power	6,5W
Nominal flux	920lm
Colour rendering index	90
Rf	92
Rg	99
CCT nominal	2700K
SDCM	1.5
Lifetime (L80/B10)	72000h tq +25°C
Lifetime (L90/B10)	72000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

MWFL version - convex faceted highly reflective anodised aluminium precision optics, a holographic diffusion filter and a black silicone cut off ring.

Optic	MWFL
Beam angles	MWFL
Optical efficiency	73.9%
Fixture flux	680lm
Luminous efficacy	96lm/W
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Cylindrical body in CNC machined aluminum and coated with powder paint.

Colour and finish	Plaster white
Dimensions	ØxH 43x270mm
Weight	0.3Kg
Version	ON-OFF
Degree of protection	IP20

Electrical characteristics

ON-OFF version, track power supply.

Fixture Power	7.1W
Power supply	48Vdc
Insulation Class	CLASS 3
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	0°C / +25°C

Installation

Quick coupling system for mounting the product on the track.

Notes

Not polarized fixture. White adapter. 110-277Vac version available on request. Not compatible with Fortyeight Trimless Deep track.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.