

LIGHTING SYSTEMS

Fortyeight Track trimless deep - recessed



Code

9500-2/B-TA1

POWER SUPPLY
CONTROL

COLOUR

0-60Vdc

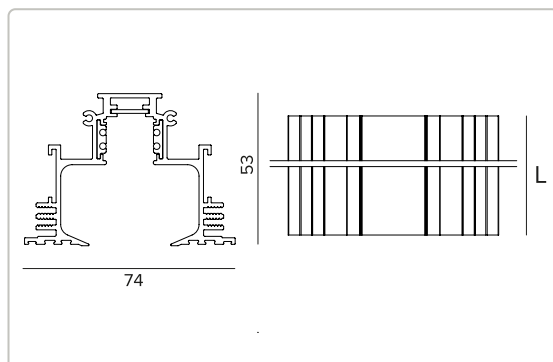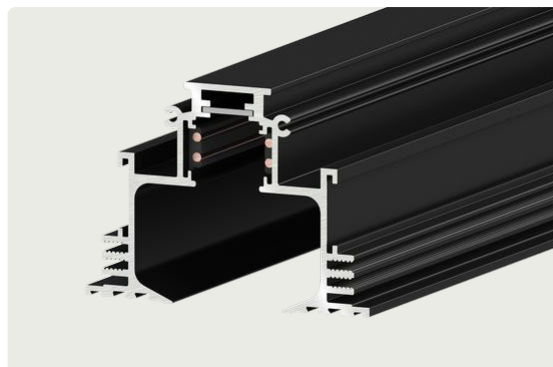

The figures on the drawing are expressed in mm.



Technical Data

Concept

Standard track with 4 low voltage conductors.

Mechanical characteristics

Painted black extruded aluminium electrified track. PVC insulated copper conductors.

Colour and finish	Black
Dimensions	AxBxH 2000x74x53mm
Weight	3.2Kg
Version	Trimless Deep

Electrical characteristics

The power supply voltage must be 48Vdc and the current must not exceed 15A.

Power supply	0-60Vdc
Insulation Class	CLASS 3
Driver included	NO

Installation

Trimless Deep Version - can be installed in false ceilings using special accessories. Allows for hidden installation of Logico30 linear fixtures for a flush light effect. All tracks have end caps to be used on the last track in the line (every profile has a cap to fit every shape).

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^{\circ}\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Technical Data**Notes**

Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes


End Caps



CODE	COLOUR
1T6801	●

End cap for Trimless Deep track.
2x


Mounting System



CODE
1T9583

Kit composed of 4 lateral brackets and 2 stiffening brackets for the Trimless Deep track version.

Power Supply



CODE	IP	OUTPUT VOLTAGE	POWER SUPPLY	POWER	LXHXP
1T6917EL	IP20	48Vdc	220-240Vac	60W	225x36x60mm
1T6916EL	IP20	48Vdc	220-240Vac	130W	240x49x60mm
1T7403EL	IP67	48Vdc	110-277Vac	210W	251x37x90mm

Electronic ON-OFF power supply.



CODE	COLOUR
9501-S/B-E	●

Not polarized power head.

Accessories

Mechanical connector



CODE	COLOUR
S-9500/314-B	●

Supporting bracket for direct connection for trimless and trimless deep applications.

Tool



CODE
S-9000/T

Tool for shearing conductors, to be used if necessary to cut the track during installation.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Electrical Connector



CODE

COLOUR

9511/B-E



Not polarized L joint for trimless and trimless deep versions and a H section.
For recessed installation the tracks must first be cut to 45°.



CODE

COLOUR

9503-S/B-E



Not polarized through joint.



CODE

COLOUR

9518-S/B-E



Non polarised flexible connector.

Control systems



CODE

2T0131

IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology.
It has a DALI2 output with the capacity to control up to 40 lighting fixtures.
With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP20 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.
LxHxP=130x22x30mm.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.