



LIGHTING SYSTEMS

Logico System - Ceiling/Suspension - Blind module - L connector

Code
1T7387

**POWER SUPPLY
CONTROL**

220-240Vac

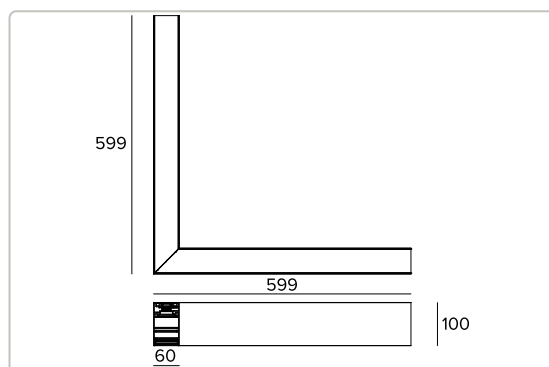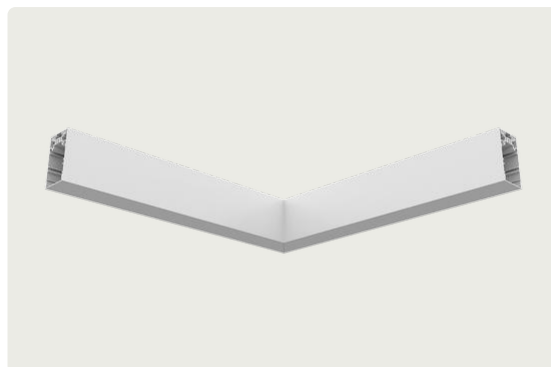COLOUR

The figures on the drawing are expressed in mm.



2.5

IP20

Technical Data**Concept**

Blind module for ceiling or suspension system installation.

Mechanical characteristics

Painted extruded aluminium linear body.

Colour and finish

Plaster white

Dimensions

AxBxH 599x599x100mm

Weight

2.5Kg

Version

L connector

Degree of protection

IP20

Electrical characteristics

Complete with electrical cables to guarantee feeding continuity (max 2kW for the ceiling version; max 0.6kW for the suspension version).

Power supply

220-240Vac 50/60Hz

Insulation Class

CLASS 1

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Installation

For linear configurations complete with a special connector to attach to the power supply. For other configurations accessorise with special X, T and L connectors. To be completed with mounting systems and end caps.

Warranty

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes


End Caps



CODE	COLOUR
1T5937	○

End caps for Ceiling Mounted and Suspension.
2x


Mounting System



CODE	COLOUR
1T5912	○

Ceiling installation: polycarbonate bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.




CODE	COLOUR
1T6919	○

Wall installation: painted metal bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version.

Suspension




CODE	COLOUR	L
1T5899	○	2000mm
1T5902	○	4000mm

Suspension cable.
To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.

Suspension cable compatible with ceiling or wall installations, even inclined.

Accessories

Electrical Connector



CODE
1T5911

Linear electrical connector.
EL/DALI.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.