

CEILING LUMINAIRES

PENDANT LUMINAIRES

Logico Easy Stand Alone 100 - UGR19 - Emergency

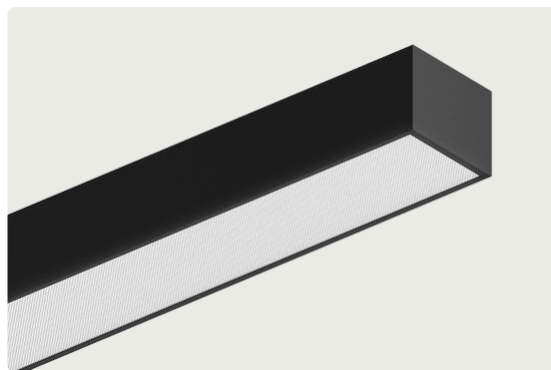
Code

T026MX840ELDB

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
4000K 80	UGR19	59W 5982lm

POWER SUPPLY
CONTROL

COLOUR

220-240Vac
ON-OFF
(EMERGENCY
VERSION)

The figures on the drawing are expressed in mm.



	4000K	H(m)	D(m)	E _{max} (lx)		
	Ra80		88°			
	Fixture Power	59W	1	1.94	3137	
	Source Flux	5982lm	2	3.88	784	
	Fixture Flux	5983lm	3	5.83	349	
	Efficacy	101lm/W	4	7.77	196	
	G0301	I _{max} =525cd/klm	I _{max}	3138cd	5	9.71

Technical Data

Concept

Linear stand alone LED fixture for ceiling mounted or suspension installation. Emergency version.

Source

LED Engine made of linear LED boards Ra80.

Energy efficiency class	D
Nominal power	52W
Nominal flux	5982lm
Colour rendering index	80
R _f	84
R _g	95
CCT nominal	4000K
Lifetime (L80/B10)	100000h tq +25°C
Lifetime (L90/B10)	50000h tq +25°C

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Direct emission. Controlled light - UGR19 optics: optical system made of a steel reflector with white polymer coating and UGR closing diffuser screen (UGR<19 and L65<3000 cd/m² EN-12464-1).

Emission	Direct
Optic	UGR19
Optical efficiency	100%
Fixture flux	5982lm
Emergency fixture flux BLF	7.5aaa%
Luminous efficacy	101lm/W
Photobiological safety	Compliant with RGO exempt risk group

Mechanical characteristics

Painted extruded aluminium body with 100mm section and polycarbonate end caps. Upper closing screen in black PVC.

Colour and finish	Black
Dimensions	AxBxH 2340x100x80mm
Weight	7.4Kg
Version	Linear
Degree of protection	IP40
Mechanical Resistance	IK02

Electrical characteristics

Integrated electronic ON-OFF driver. Equipped with emergency pack - permanent emergency (1h autonomy and 24h recharge).

Fixture Power	59W
Power supply	220-240Vac 50/60Hz
Insulation Class	CLASS 1
Type of driver / Control	ON-OFF (EMERGENCY VERSION)
Driver included	YES
SAFE FLICKER	PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature	0°C / +25°C
Relative humidity UR	<85%

Installation

To be completed with mounting systems for surface or suspended application.

Notes

Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Regulations and Certifications

CE

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data**Warranty**

5 years.

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Accessories

Canopy



CODE

COLOUR

A004B



Canopy with 5 poles terminal block.
Feeding cable not included.

Bracket



CODE

A006L

Bracket for ceiling installation (2 pieces).
Two brackets needed for each lighting module.

For LOGICO EASY 100.



CODE

A007L

Bracket with adjustment system for suspended installation (2 pieces).
Two brackets needed for each lighting module.

For LOGICO EASY 100.

Suspension



CODE

VERSION

A008T

L = 6m

A008U

L = 5m

A008V

L = 4m

A008W

L = 3m

A008X

L = 2m

A008Y

L = 1m

A008Z

L = 0,5m

Suspension cable (2 pieces).

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.