PROJECTORS


Dart Round Medium RGBW



Code
1E4050

LIGHT COLOUR	LIGHT DISTRIBUTION	OUTPUT
RGBW	FL 29°	32.8W 1080lm

POWER SUPPLY CONTROL	COLOUR
850mA	

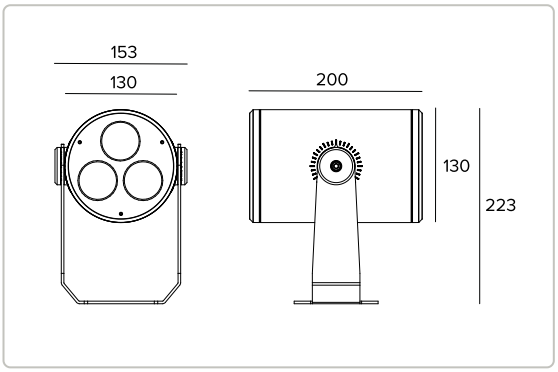

The figures on the drawing are expressed in mm.

3.35 IP66 IK10 1.5M CE

The fixture's photometric values can be found on the following pages

Technical Data

Concept

Professional adjustable LED projector.

Source

RGBW light module made of RGBW LED multichip. Color temperature of the white source: 6500K.

Energy efficiency class	F
Nominal power	33W
Nominal flux	See photometries
Colour rendering index	
CCT nominal	See photometries

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Technical Data

Illuminotechnical characteristics

Equipped with precision methacrylate lenses and spreader filter.

Optic	FL
Beam angles	FL
Optical efficiency	68.92%
Fixture flux	See photometries
Luminous efficacy	See photometries
Photobiological safety	Compliant with RG1 low risk group

Mechanical characteristics

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish	Ferrite
Dimensions	ØxH 130x200mm
Weight	3.35Kg
Degree of protection	IP66
Mechanical Resistance	IK10

Electrical characteristics

Remote DMX-RDM electronic driver with 4 independent constant current outputs. The driver is housed inside an IP68 box and allows to control 1 fixture. Controlled using DMX-RDM protocols that make it possible to programme the fixture remotely (no dip-switch) using the DMX data line. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory. All versions are pre-wired with a 1.5m long 8-pole feeding cable (to be connected to the IP68 driver box).

Fixture Power	See photometries
Power supply	850mA
Insulation Class	CLASS 3
Driver included	NO
Ambient temperature	-25°C / +35°C

Installation

Mounting bracket with aiming adjustability. Adjustable up to ±45° on the horizontal pane and +90°/-45° on the vertical plane.

Notes

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Photometrics show the maximum emission values of fixtures. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

Regulations and Certifications

CE

Warranty

5 years.

Technical Data

Warning

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com


Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Photometries

RGBW


Fixture Power	32.8W
Nominal flux	1567lm
Fixture flux	1080lm
Luminous efficacy	33lm/W



-		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	33W	1	0.51	3590
Source Flux	1567lm	2	1.02	898
Fixture Flux	1080lm	3	1.53	399
Efficacy	33lm/W	4	2.04	224
Imax	3590cd	5	2.55	144

RGB


Fixture Power	24.9W
Nominal flux	814lm
Fixture flux	561lm
Luminous efficacy	23lm/W



-		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	25W	1	0.51	1865
Source Flux	814lm	2	1.02	466
Fixture Flux	561lm	3	1.53	207
Efficacy	23lm/W	4	2.04	117
Imax	1865cd	5	2.55	75

WHITE


CCT nominal	6500K
Fixture Power	8.6W
Nominal flux	860lm
Fixture flux	593lm
Luminous efficacy	69lm/W



6500K		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	9W	1	0.51	1970
Source Flux	860lm	2	1.02	493
Fixture Flux	593lm	3	1.53	219
Efficacy	69lm/W	4	2.04	123
Imax	1970cd	5	2.55	79

RED


Fixture Power	6.5W
Nominal flux	318lm
Fixture flux	219lm
Luminous efficacy	34lm/W



-		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	7W	1	0.51	729
Source Flux	318lm	2	1.02	182
Fixture Flux	219lm	3	1.53	81
Efficacy	34lm/W	4	2.04	46
Imax	729cd	5	2.55	29

GREEN


Fixture Power	10W
Nominal flux	573lm
Fixture flux	395lm
Luminous efficacy	39lm/W



-		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	10W	1	0.51	1313
Source Flux	573lm	2	1.02	328
Fixture Flux	395lm	3	1.53	146
Efficacy	39lm/W	4	2.04	82
Imax	1313cd	5	2.55	53

BLUE

Fixture Power	8.8W
Nominal flux	112lm
Fixture flux	77lm
Luminous efficacy	9lm/W



-		H(m)	D(m)	Emax(lx)
-			29°	
Fixture Power	9W	1	0.51	257
Source Flux	112lm	2	1.02	64
Fixture Flux	77lm	3	1.53	29
Efficacy	9lm/W	4	2.04	16
Imax	257cd	5	2.55	10

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy


Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Related codes

Power Supply




CODE
1E3883

DMX 4 channel driver - 850mA.
50W, LxHxP=220x80x120mm, 120-277Vac.
IP68 gray powder coated aluminum box.

Accessories

Filter



CODE	COLOUR
1E4263	

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Screen




CODE	COLOUR
1E4007	

Asymmetric screen.
Powder coated stainless steel.



CODE	COLOUR
1E4008	

Cylindrical screen.
Powder coated stainless steel.
Short version.



CODE	COLOUR
1E4058	

Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



CODE	COLOUR
1E3026	

Plate for fixture rotation.
Powder coated stainless steel.



CODE	COLOUR	ØXH
1E3028		96x182mm

Earthspike.
Powder coated stainless steel.

TARGETTI

CCIAA Firenze
Share Capital: € 500.000,00
VAT N. (IT): 01537660480
R.E.A: FI-275656

Targetti Sankey S.r.l.
Via Giuseppe Garibaldi, 82
50041 Calenzano (FI)
Italy

Tel: +39 055 37911
targetti.com
targetti@targetti.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.



CODE	COLOUR
1E2825	

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).



CODE	COLOUR
1E3027	

Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.

Control systems



CODE

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



CODE

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 indipendent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



CODE

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.