

DURASTRIP EXTRALONG 24V

LED

LED 2835SMD
120 LED/m
11W/m
24VDC
Ra >90
Lifetime: >50,000 h
Warranty: 5 years

COLOURS OF LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.
3000K - 4000K

DIMMABILITY

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDA controllers
CASAMBI compatible

CONNECTIONS

IP20: terminals with free wires
IP65: complete with a 15 cm long IP65/68 M/F cable on 2 sides.
Maximum connection length 20 m.
Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately

PACKAGE


Packaged in 20 m reels.
Or custom products cut to specific lengths see page 11, 318.

EXTRALONG 24V, produced in 20 m reels allow for installations of great lengths thus reducing power points to a minimum: with two reels and power supplies at opposite ends, up to 40 metres of lines of light can be obtained without running cables.

EXTRALONG 24V solve problems in situations that require indirect lighting (cove lighting) or outdoors where numerous power supplies cannot be stored or where there are limitations for cables to pass.

EXTRALONG 24V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

LED SPACING AND PITCH CUT

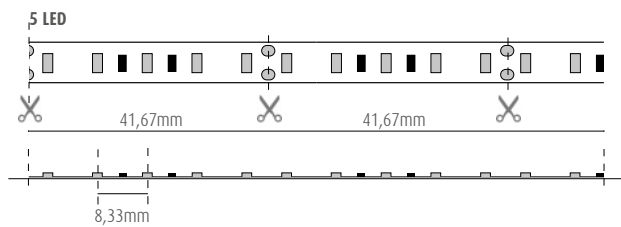

Cutting DURASTRIP to size*:

fixed cost of piece work

VA01

* Please consider pitch cut. Includes a 20 cm cable.



DURASTRIP EXTRALONG 24V

PRO 24V DC Ra>90 50000h L70 -25° +35°C III UL E471161 G5/h24 Risk Group 0

MIN 3,5mm NO DOT


IP20

art.	W	W/m	lm/m	K	N° LED/m	▲	L	L1	L2	80119058	📄
07U302411INL2000 ▶	220	11	695	3000	120	120°	10	1,7	20000	923181	1
07U402411INL2000	220	11	715	4000	120	120°	10	1,7	20000	923198	1

▶ Orderable only with MOQ

IP65

art.	W	W/m	lm/m	K	N° LED/m	▲	L	L1	L2	80119058	📄
07U302411XOL2000	220	11/m	695	3000	120	120°	12	5	20000	923204	1
07U402411XOL2000	220	11/m	715	4000	120	120°	12	5	20000	923211	1



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



DRIVER



210W IP20 - IP65

ELG-240-24A-3Y

CONTROLLER



DALI-ZKTPC (DALI)

ZKCAFF (DALI)

ZKCDMXWFF (DMX)

ZKC1-10FF (1-10)

FF = FLICKER FREE

DRIVER: complete info on page 161