

DURASTRIP EXTREME TUNABLE CCT

LED

LED 5050RGBA+5050 CCT
 96 LED/m
 115W (23W/m)
 24VDC
 3000-6500K: Ra >80
 Lifetime: >50,000 h
 Warranty: 5 years

COLOURS OF LIGHT

Choice of colour temperature in the whites + RGBA
 3000-6500K + RGB+ AMBRA 1600K

BINNING

ANSI/SDCM: 3 step.

DIMMABILITY

NOTE: 6 channels needed
 Dimmable 0-100% Flicker Free
 DMX
 Analogue and digital domotic control systems

CONNECTIONS

IP20: terminals with free wires
 IP65: complete with a 15 cm long IP65/68 M/F cable on 2 sides.
 Maximum connection length 5 m.
 Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface.
 When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

PACKAGE

Packaged in 5 m reels.
 Or custom products cut to specific lengths see page 11, 318.

Cutting DURASTRIP to size*:

fixed cost of piece work


VA01

* Please consider pitch cut. Includes a 20 cm cable.


Why Extreme Tunable? This strip adds to the characteristics of the CCT, which varies the white from 3000K to 6500K, and the potential offered by an LED that encloses the Red Green and Blue spectra + a very warm amber colour (wonderful for the 'ancient stone' effect).

DURASTRIP Extreme Tuneable gives the designer the freedom to choose previously unthinkable shades of light without using complex electronic equipment and create the most diverse and new, pleasant and amazing lighting scenes using just one strip.

LED SPACING AND PITCH CUT

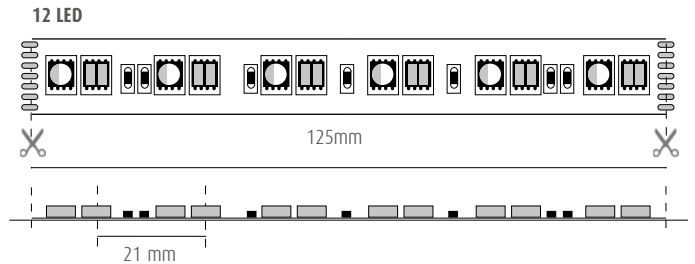

IP20



IP65



PRO	24V DC	Ra 80	50000h L70	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0
------------	--------	-------	------------	---------------	-----	---------------	--------	--------------

MIN 20mm	NO DOT
-------------	-----------

IP20

art.	W	W/m	lmTOT/m	K	N° LED/m		L	L1	L2		
07UET2423IN	115	23	1250	3000-6500+ ●●●●● RGBA	96	120°	15	2	5000	8011905	1


Always use with aluminium profiles for heat dissipation.

IP65

art.	W	W/m	lmTOT/m	K	N° LED/m		L	L1	L2		
07UET2423EX	115	23	1250	3000-6500+ ●●●●● RGBA	96	120°	17	5	5000	8011905	1

Always use with aluminium profiles for heat dissipation.

- Limited availability - reorderable only with MOQ



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



DRIVER

	115W IP20	XLG-150-24-A
	115W IP65	XLG-150-24-A

CONTROLLER

	DALI-ZKTPC (DALI)
	ZKCDAFF (DALI)
	ZKCDMXWFF (DMX)
	ZKC1-10FF (1-10)
	FF = FLICKER FREE

PROFILES

	UNIVERSAL PROFILES
	SURFACE PROFILES
	RECESSED PROFILES

DRIVER: complete info on page 161