

# DURASTRIP HIGH EFFICIENCY IP20

## LED

LED 2835:  
 80 LED/m - 7,2W/m  
 128 LED/m - 11,5W/m  
 160 LED/m - 14,4W/m  
 240 LED/m - 21,6W/m  
 24VDC  
 Ra >92  
 Lifetime: >50,000 h  
 Warranty: 5 years

## BINNING

ANSI/SDCM: 3 step.

## DIMMABILITY

Dimmable 0-100% Flicker Free  
 DALI - DMX - 1-10  
 Analogue and digital domotic control systems  
 Push Dali with ZKCA controllers  
 CASAMBI compatible

## CONNECTIONS

IP20: terminals with free wires  
 To connect in series or parallel, see diagram on page 160.  
 Strips can be cut to size by following the cutting indications printed on the strips.

## ASSEMBLY





Complete with 3M double-sided tape to attach to the surface.  
 When using double-sided tape decrease the application surface adequately

## PACKAGE

Packaged in 5 m reels.  
 For custom products cut to specific lengths see page 11, 318.

A high efficiency range to meet the needs of prestigious projects. With an efficiency of 180 lumens/watt, these strips emit from 1000 to 4000 lumens per metre, these strips are perfect for general lighting applications. The High Efficiency line is characterised by excellent quality, reliability, high colour rendering, excellent white homogeneity, durability, long service life and great energy savings!

White shades: 3000K and 4000K available and all other colours on request with MOQ. In IP20 and IP68 versions.

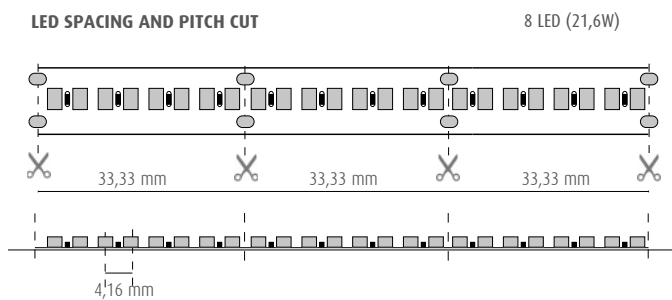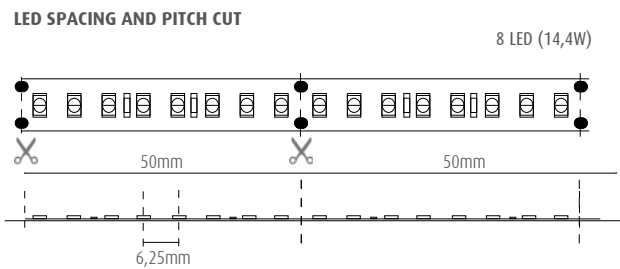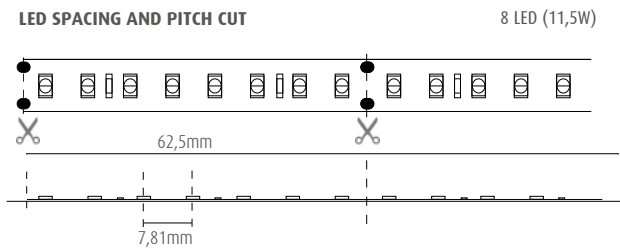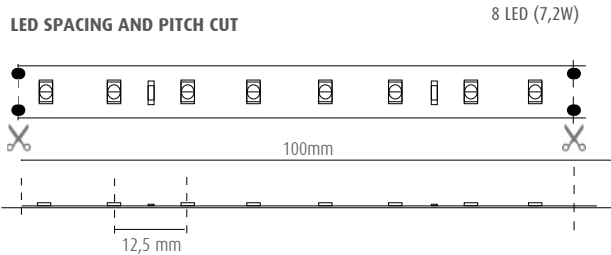

# DURASTRIP HIGH EFFICIENCY IP20

<b>PRO</b>	24V DC	Ra>92	50000h L70	IP20	-25° +35°C	III	UL E471161	G5/ h24	Risk Group 0
------------	--------	-------	------------	------	---------------	-----	---------------	------------	-----------------

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2	8011905	
NEW <b>07U272407INHE</b> ▶	36	7,2	1188	2700	80	120°	10	1	5000	000578	1
NEW <b>07U302407INHE</b>	36	7,2	1225	3000	80	120°	10	1	5000	000585	1
NEW <b>07U352407INHE</b> ▶	36	7,2	1225	3500	80	120°	10	1	5000	000592	1
NEW <b>07U402407INHE</b>	36	7,2	1265	4000	80	120°	10	1	5000	000608	1
NEW <b>07U602407INHE</b> ▶	36	7,2	1265	6000	80	120°	10	1	5000	000615	1
NEW <b>07U272411INHE</b> ▶	58	11,5	1896	2700	128	120°	10	1	5000	000622	1
NEW <b>07U302411INHE</b>	58	11,5	1955	3000	128	120°	10	1	5000	000639	1
NEW <b>07U352411INHE</b> ▶	58	11,5	1955	3500	128	120°	10	1	5000	000646	1
NEW <b>07U402411INHE</b>	58	11,5	2020	4000	128	120°	10	1	5000	000653	1
NEW <b>07U602411INHE</b> ▶	58	11,5	2020	6000	128	120°	10	1	5000	000660	1
NEW <b>07U272414INHE</b> ▶	72	14,4	2377	2700	160	120°	10	1	5000	000677	1
NEW <b>07U302414INHE</b>	72	14,4	2450	3000	160	120°	10	1	5000	000684	1
NEW <b>07U352414INHE</b> ▶	72	14,4	2450	3500	160	120°	10	1	5000	000691	1
NEW <b>07U402414INHE</b>	72	14,4	2530	4000	160	120°	10	1	5000	000707	1
NEW <b>07U602414INHE</b> ▶	72	14,4	2530	6000	160	120°	10	1	5000	000714	1
NEW <b>07U272421INHE</b> ▶	108	21,6	3575	2700	240	120°	10	1	5000	000721	1
NEW <b>07U302421INHE</b>	108	21,6	3685	3000	240	120°	10	1	5000	000738	1
NEW <b>07U352421INHE</b> ▶	108	21,6	3685	3500	240	120°	10	1	5000	000745	1
NEW <b>07U402421INHE</b>	108	21,6	3800	4000	240	120°	10	1	5000	000752	1
NEW <b>07U602421INHE</b> ▶	108	21,6	3800	6000	240	120°	10	1	5000	000769	1

▶ Orderable only with MOQ

## DRIVER



36W IP20	SLD-50-24
58W - 72W IP20	SLD-80-24
108W IP20	XLG-150-24-A

## CONTROLLER



<b>DALI-ZKTPC</b> (DALI)
<b>ZKCDAFF</b> (DALI)
<b>ZKCDMXWFF</b> (DMX)
<b>ZKC1-10FF</b> (1-10)
<b>FF = FLICKER FREE</b>

## PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161