

DURASTRIP HIGH EFFICIENCY IP68

LED

LED 2835:
 80 LED/m - 7,2W/m
 128 LED/m - 11,5W/m
 160 LED/m - 14,4W/m
 240 LED/m - 21,6W/m
 24VDC
 Ra >92
 Lifetime: >50,000 h
 Warranty: 5 years

BINNING

ANSI/SDCM: 3 step.

DIMMABILITY

Dimmable 0-100% Flicker Free
 DALI - DMX - 1-10
 Analogue and digital domotic control systems
 Push Dali with ZKCA controllers
 CASAMBI compatible

CONNECTIONS

IP68: complete with a 15 cm long IP65/68 M/F cable on 2 sides.
 To connect in series or parallel, see diagram on page 160.
 Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface.
 When using double-sided tape decrease the application surface adequately


PACKAGE

Packaged in 5 m reels.
 For custom products cut to specific lengths see page 11, 318.


A high efficiency range to meet the needs of prestigious projects. With an efficiency of 180 lumens/watt, these strips emit from 1000 to 4000 lumens per metre, these strips are perfect for general lighting applications. The High Efficiency line is characterised by excellent quality, reliability, high colour rendering, excellent white homogeneity, durability, long service life and great energy savings!

White shades: 3000K and 4000K available and all other colours on request with MOQ. In IP20 and IP68 versions.


LED SPACING AND PITCH CUT 8 LED (7,2W)

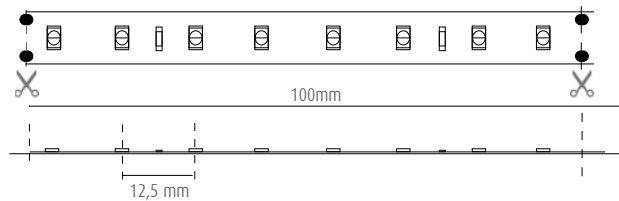



LED SPACING AND PITCH CUT 8 LED (11,5W)

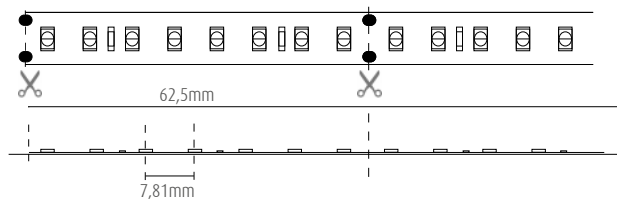

LED SPACING AND PITCH CUT 8 LED (14,4W)

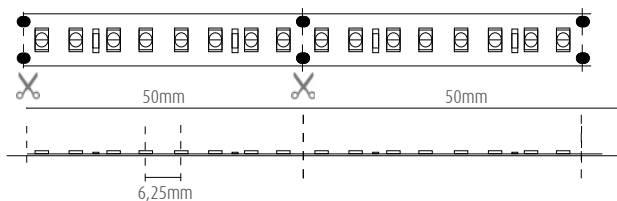

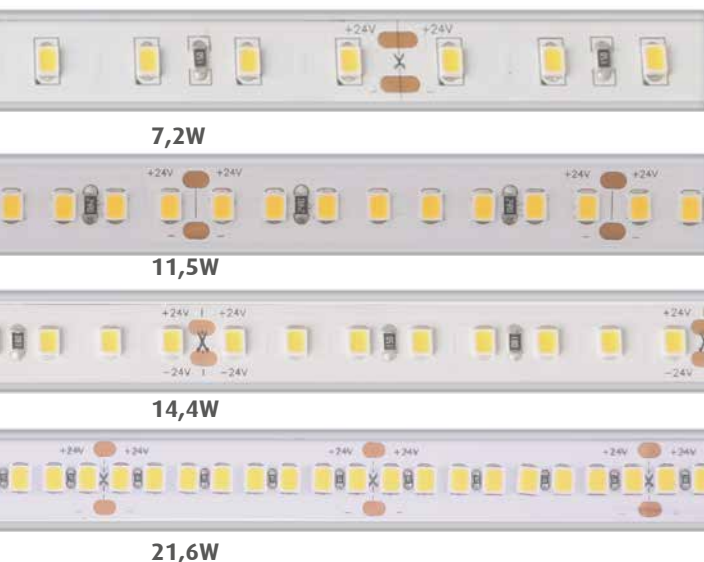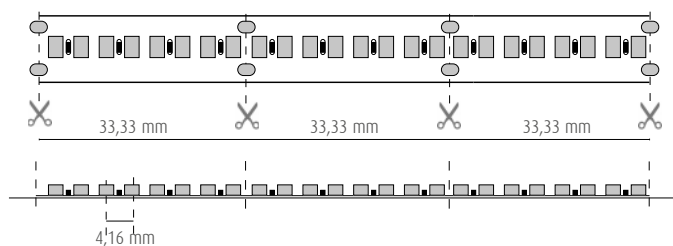


LED SPACING AND PITCH CUT 8 LED (21,6W)



DURASTRIP HIGH EFFICIENCY IP68

PRO	24V DC	Ra>92	50000h L70	IP68	-25° +35°C	III	UL E471161	G5/ h24	Risk Group 0
-----	--------	-------	------------	------	---------------	-----	---------------	------------	-----------------

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2	 8011905	
NEW 07U272407XOHE ▶	36	7,2	1188	2700	80	120°	12	4	5000	000370	1
NEW 07U302407XOHE	36	7,2	1225	3000	80	120°	12	4	5000	000387	1
NEW 07U352407XOHE ▶	36	7,2	1225	3500	80	120°	12	4	5000	000394	1
NEW 07U402407XOHE	36	7,2	1265	4000	80	120°	12	4	5000	000400	1
NEW 07U602407XOHE ▶	36	7,2	1265	6000	80	120°	12	4	5000	000417	1
NEW 07U272411XOHE ▶	58	11,5	1896	2700	128	120°	12	4	5000	000424	1
NEW 07U302411XOHE	58	11,5	1955	3000	128	120°	12	4	5000	000431	1
NEW 07U352411XOHE ▶	58	11,5	1955	3500	128	120°	12	4	5000	000448	1
NEW 07U402411XOHE	58	11,5	2020	4000	128	120°	12	4	5000	000455	1
NEW 07U602411XOHE ▶	58	11,5	2020	6000	128	120°	12	4	5000	000462	1
NEW 07U272414XOHE ▶	72	14,4	2377	2700	160	120°	12	4	5000	000479	1
NEW 07U302414XOHE	72	14,4	2450	3000	160	120°	12	4	5000	000486	1
NEW 07U352414XOHE ▶	72	14,4	2450	3500	160	120°	12	4	5000	000493	1
NEW 07U402414XOHE	72	14,4	2530	4000	160	120°	12	4	5000	000509	1
NEW 07U602414XOHE ▶	72	14,4	2530	6000	160	120°	12	4	5000	000516	1
NEW 07U272421XOHE ▶	108	21,6	3575	2700	240	120°	12	4	5000	000523	1
NEW 07U302421XOHE	108	21,6	3685	3000	240	120°	12	4	5000	000530	1
NEW 07U352421XOHE ▶	108	21,6	3685	3500	240	120°	12	4	5000	000547	1
NEW 07U402421XOHE	108	21,6	3800	4000	240	120°	12	4	5000	000554	1
NEW 07U602421XOHE ▶	108	21,6	3800	6000	240	120°	12	4	5000	000561	1

▶ Orderable only with MOQ

DRIVER



36W - 58W - 72W IP68	XLG-100-24-A
108W IP20	XLG-150-24-A

CONTROLLER



DALI-ZKTPC (DALI)
ZKCAFF (DALI)
ZKCDMXWF (DMX)
ZKC1-10FF (1-10)

FF = FLICKER FREE

PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161

TARGETTI powered by DURALAMP