

DURASTRIP HiVolt

LED

LED 2835
12W/m
230V
70 LED/m
Ra >80
Lifetime: internal use >50,000h; external use>35,000h
Warranty: 3 years

COLOURS OF LIGHT

Choice of Colour Temperatures

BINNING

ANSI/SDCM: 3 step.
2700K - 3000K - (3500 - 120V) - 4000K

DIMMABILITY

Dimmable with DMX dimmer code ZKCDMX-HV.

CONNECTIONS

Up to 50 metres.
HiVolt IP65 strips are supplied ready to be installed complete with a cable of 1.5m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires (IP65) 1.5m.
In addition to the value of the goods ordered consider the cost of cutting and installing components for every single piece (cable, fuse, Schuko plug and cut).

ASSEMBLY

We recommend to order the assembly clips considering to use 4 clips for every metre. Any particular requests will be specified in the project form.

PACKAGE

Supplied already cut to measures.
For custom product cut to specific lengths see page 11, 312.

ACCESSORIES

Fixing bridges.

Cutting DURASTRIP HiVOLT to size*:

fixed cost of piece work

VA00

* Please consider pitch cut. Includes a 1.5 m cable.

DURASTRIP HiVolt differs from similar products due to its extreme sturdiness: the protective sheath is reinforced by a double extrusion layer which provides a solid and highly resistant compacted quality.

DURASTRIP HiVolt for direct mains connection provides the advantage of being able to reach a length of 50 metres with power directly from mains electrical supply whilst offering lighting uniformity and colour along the entire length of the strip. Without the inconvenience of a remote LED driver, the strips can be used in surface mounted installations. With a Schuko plug the product is IP44 but supplied already cut to the required length with a free wire arrangement, it is possible to achieve an IP65 protection provided the cables are terminated into a suitably rated enclosure making DURASTRIP HiVolt easy to maintain and resist the most common aggressive environments.






PRO	Ra>80		50000h L70 INDOOR	35000h L70 OUTDOOR	IP65		G3
------------	-------	--	-------------------------	--------------------------	------	--	-----------

220-240V
50/60Hz

art.	W/m	lm/m	K		N° Led/m	L	L1	
07U27HVE12	12	1150	2700	110°	70	16	8	per metre
07U30HVE12	12	1200	3000	110°	70	16	8	per metre
07U40HVE12	12	1280	4000	110°	70	16	8	per metre


For processes with free-wires terminals IP65 WITHOUT PLUG: please specify when ordering.

IP44

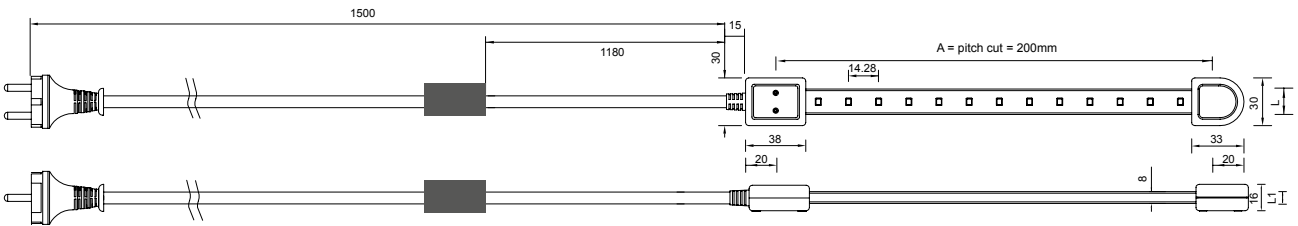


SCHUKO PLUG

IP65

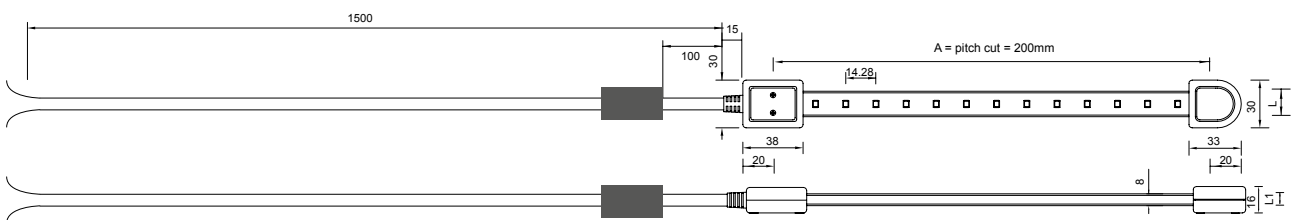

FREE WIRES

**EASY MOUNTING:
IT CAN BE FIXED WITH
FIXING BRIDGES.**



	P06B	P04F*	P05H*
	P06H	P04H*	P06A*
	P07H	P05D*	P06G*
	P08D		



ZKCDMX-HV

* Can be used with HighVolt strips considering that the end caps and the electric power supply remain outside the profile.

LIST OF ACCESSORIES



art. **Accessory KIT for DURASTRIP HiVolt**



KTHVCL Set mounting clip for HiV strip (10pcs)

849689

1



art. **Dimmer DMX for DURASTRIP HiVolt**



ZKCDMX-HV Can be used with ZKTPC; 300W/CH

862473

1

3 channel.



DMX WALL TOUCH DIMMER FOR WHITE LIGHT DURASTRIP

art.	Input Voltage	Number of DMX channels	Number of areas	Number of scenes	L1	L2	L3		
ZKTPC-DIM ♦	5Vdc	4	4	4	86	86	10	39635	1

Each channel can have 256 levels of light variation and 4 favourite scenes can be saved.

“Memory” function: the last colour temperature chosen is recalled when the light is switched back on again; 3 scenes can be saved.

See page 168.

♦ To be discontinued