

DURASTRIP HiVolt CCT + DIM TO WARM / 120V

LED

LED 2835
12W/m
120V
120 LED/m
Ra >90
Lifetime: indoor use >50.000h; outdoor use >35.000h
Warranty: 3 years

COLOURS OF LIGHT

CCT: 2700K --> 6500K
DIM TO WARM: 1800K-->3000K

BINNING

ANSI/SDCM: 3 step.

DIMMABILITY

Dimmable ELV

CONNECTIONS

Up to 50 metres with a single power supply.
HiVolt IP65 strips are supplied ready to be installed complete with a cable of 1.50 m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires.
Strips can be supplied also with IP40 wiring.
In addition to the value of the goods ordered consider the cost of cutting and installing components for every single piece (1.5 m cable, fuse, Schuko plug if required and cut).

ASSEMBLY

We recommend to order the assembly clips considering to use 4 clips for every metre. Any particular requests will be specified in the project form.

PACKAGE

Supplied already cut to measures.
For custom product cut to specific lengths see page 11, 312.

ACCESSORIES

Mounting clips.

Mains voltage strips, 120V with possibility of varying the colour temperature.

2700K to 6500K version to be able to take advantage of all of the potential white shades and vary the atmosphere of the areas.

Version from 1800K to 3000K for warm, welcoming and relaxing atmospheres: this strip warms up the colour of the light, lowering the colour temperature.

TUNABLE



DIM TO WARM



Cutting DURASTRIP HiVOLT to size*:

fixed cost of piece work

VA00

* Please consider pitch cut. Includes a 1.5 m cable.





TUNABLE

art.	W/m	MAX lm/m	K		N° Led/m	L	L1	
07UHVU2750K	12	1050 (6500K)	2700-6500	110°	120	16,5	7	per metre*

For processes with IP40 terminals with SHUKO plug, add **IN** at the end of the code / For processes with IP40 terminals without plug add **-S** at the end of the code

For processes with terminals IP44 WITH Shuko PLUG add **EX** at the end of the code / For processes with terminals IP65 WITHOUT Shuko PLUG add **-S** at the end of the code

DIM TO WARM

art.	W/m	MAX lm/m	K		N° Led/m	L	L1	
07UHVU1830K	12	950 (3000K)	1800-3000	110°	120	16,5	7	per metre*


For processes with IP40 terminals with SHUKO plug, add **IN** at the end of the code / For processes with IP40 terminals without plug add **-S** at the end of the code

For processes with terminals IP44 WITH Shuko PLUG add **EX** at the end of the code / For processes with terminals IP65 WITHOUT Shuko PLUG add **-S** at the end of the code




art	Description		
KTHV1-CL	Spring clips for dimmable HiVolt - 10 pcs	8011905	1

DURASTRIP HIVOLT ARCH DIMMABLE - 120V - IP40 TERMINAL "IN" WITH PLUG OR FREE WIRES

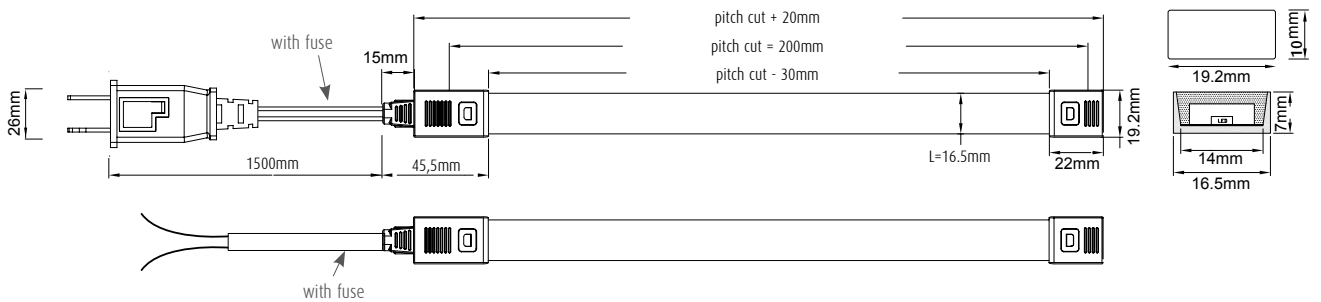

DURASTRIP HIVOLT ARCH DIMMABLE - 120V - IP65 TERMINAL "EX" WITH PLUG OR FREE WIRES

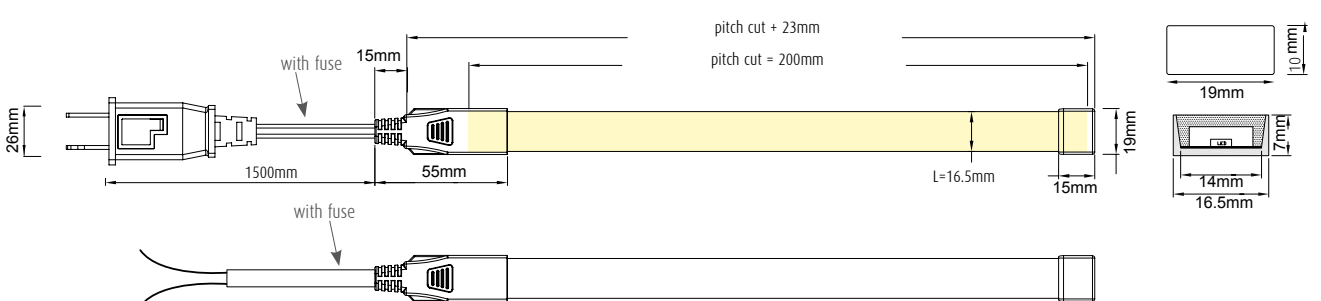

	P06B	P04F*	P05H*
	P06H	P04H*	P06A*
	P07H	P05D*	P06G*
	P08D		

* Can be used with HighVolt strips considering that the end caps and the electric power supply remain outside the profile.