

DURASTRIP PRO EVO IP20

LED

LED 2835:
128 LED/m - 5W/m - 10W/m - 15W/m
240 LED/m - 24W/m
24VDC
Ra >92
Lifetime: >50,000 h
Warranty: 5 years

BINNING

ANSI/SDCM: 3 step.

DIMMABILITY

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDA controllers
CASAMBI compatible

CONNECTIONS

IP68: complete with a 15 cm long IP65/68 M/F cable on 2 sides.
To connect in series or parallel, see diagram on page 160.
Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape decrease the application surface adequately


PACKAGE

Packaged in 5 m reels.
For custom products cut to specific lengths see page 11, 318.

The PRO EVO line is characterized by the narrow pitch of the LEDs even on the smaller power 5W/m: a quality product with 140lm/W efficiency. Excellent colour rendering, Ra92, and a choice of 4 different wattages, from 5W per metre to 24W per metre (22W for the IP68 version).


It can be used in any project and provides excellent energy savings in residential or commercial contexts.

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ. In IP20 and IP68 versions.

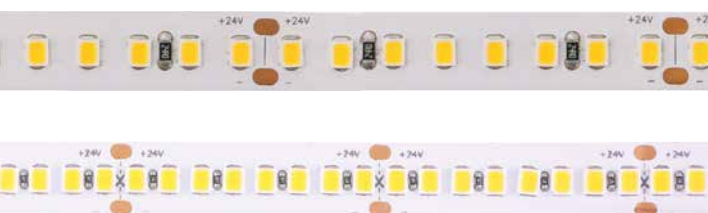


LED SPACING AND PITCH CUT

8 LED (5W / 10W / 15W)

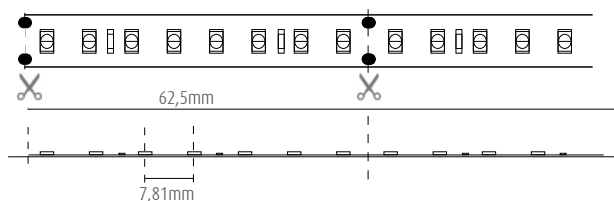

LED SPACING AND PITCH CUT

8 LED (24W)

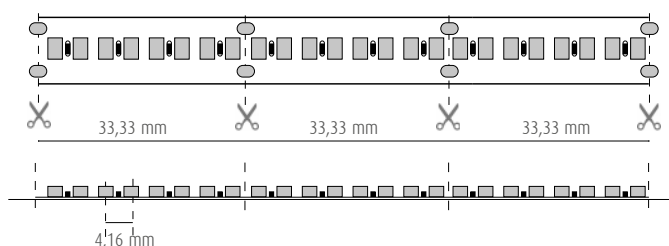

DURASTRIP PRO EVO IP20

PRO	24V DC	IP20	Ra92	50000h L70	-25° +35°C	III	UL E471161	G5/ h24	Risk Group 0
-----	--------	------	------	------------	---------------	-----	---------------	------------	-----------------

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2	8011905	
NEW 07U272405INPE ▶	25	5	630	2700	128	120°	10	2	5000	014582	1
NEW 07U302405INPE	25	5	680	3000	128	120°	10	2	5000	014599	1
NEW 07U352405INPE ▶	25	5	680	3500	128	120°	10	2	5000	014605	1
NEW 07U402405INPE	25	5	700	4000	128	120°	10	2	5000	014612	1
NEW 07U602405INPE ▶	25	5	700	6000	128	120°	10	2	5000	014629	1
NEW 07U272410INPE ▶	50	10	1260	2700	128	120°	10	2	5000	014636	1
NEW 07U302410INPE	50	10	1360	3000	128	120°	10	2	5000	014643	1
NEW 07U352410INPE ▶	50	10	1360	3500	128	120°	10	2	5000	014650	1
NEW 07U402410INPE	50	10	1400	4000	128	120°	10	2	5000	014667	1
NEW 07U602410INPE ▶	50	10	1400	6000	128	120°	10	2	5000	014674	1
NEW 07U272415INPE ▶	75	15	1890	2700	128	120°	10	2	5000	014681	1
NEW 07U302415INPE	75	15	2035	3000	128	120°	10	2	5000	014698	1
NEW 07U352415INPE ▶	75	15	2035	3500	128	120°	10	2	5000	014704	1
NEW 07U402415INPE	75	15	2100	4000	128	120°	10	2	5000	014711	1
NEW 07U602415INPE ▶	75	15	2100	6000	128	120°	10	2	5000	014728	1
NEW 07U272424INPE ▶	120	24	3025	2700	240	120°	10	2	5000	014735	1
NEW 07U302424INPE	120	24	3260	3000	240	120°	10	2	5000	014742	1
NEW 07U352424INPE ▶	120	24	3260	3500	240	120°	10	2	5000	014759	1
NEW 07U402424INPE	120	24	3360	4000	240	120°	10	2	5000	014766	1
NEW 07U602424INPE ▶	120	24	3360	6000	240	120°	10	2	5000	014773	1

▶ Orderable only with MOQ

DRIVER



25W - 50W IP20	SLD-50-24
75W IP20	SLD-80-24
110W IP20	XLG-150-24-A

CONTROLLER



DALI-ZKTPC (DALI)
ZKCDAFF (DALI)
ZKCDMXWFF (DMX)
ZKC1-10FF (1-10)
FF = FLICKER FREE

PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161