

DURASTRIP PRO IP20

LED

LED 3528
24W (5W/m) - 45W (10W/m) - 60W (12W/m) - 75W (15W/m) -
150W (30W/m)
24VDC
Ra >95
Lifetime: >60,000 h
Warranty: 5 years

COLOURS OF LIGHT

Choice of white colour temperature

BINNING

ANSI/SDCM: 2 step.
2200K - 2700K - 3000K - 3500K - 4000K - 6000K

DIMMABLE

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDA controllers
CASAMBI compatible

CONNECTIONS

IP20: terminals with free wires
Maximum connection length 5 m. Max 4A.
For longer connections, connect in series or parallel, diagram on page 160.
Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape decrease the application surface adequately.

PACKAGE

Packaged in 5 m reels.
Or custom products cut to specific lengths see page 11, 318.

ACCESSORIES


See page 58.



DURASTRIP PRO uses “copper shielded” technology (complete copper coating on the circuit on both sides of the support) designed by our Research and Development Laboratory: the increased quantity of copper improves thermal management and ensures a longer life.

DURASTRIP PRO are produced with a dual circuit substrate: the power distributed to every circuit is less, the temperature is halved and the risk of power failures is eliminated. Using LED 3528 limits the colour shifting effect on the beam emission angles.

LED SPACING AND PITCH CUT

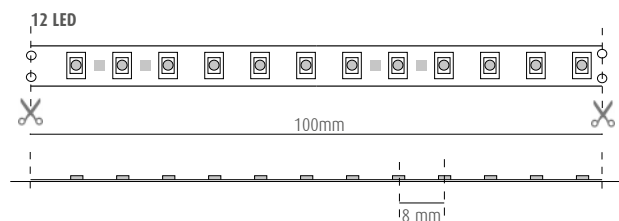

Cutting DURASTRIP to size*:

fixed cost of piece work

VA01

* Please consider pitch cut. Includes a 20 cm cable.

■ 2400K and 5000K colour temperatures available upon order: please refer to the sales force for MOQ.


DURASTRIP PRO IP20

PRO	24V DC	Ra>95	*30000h L70	60000h L70 B20	IP20	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0	MIN 3,5mm	NO DOT
------------	--------	-------	-------------	----------------	------	---------------	-----	---------------	--------	--------------	--------------	-----------

art.	W	W/m	lm/m	K	LED/m		L	L1	L2		
07U272405IN-SB ⁽¹⁾	24	5	300	2700	50	120°	10	2	5000	848705	1
07U222405IN ■	25	5	340	2200	120	120°	10	2	5000	938949	1
07U272405IN	25	5	390	2700	120	120°	10	2	5000	938826	1
07U302405IN	25	5	410	3000	120	120°	10	2	5000	938819	1
07U352405IN ■	25	5	430	3500	120	120°	10	2	5000	938802	1
07U402405IN	25	5	450	4000	120	120°	10	2	5000	938796	1
07U602405IN ■	25	5	450	6000	120	120°	10	2	5000	956752	1
07U222410IN ■	45	10	850	2200	120	120°	10	2	5000	842093	1
07U272410IN	45	10	850	2700	120	120°	10	2	5000	842116	1
07U302410IN	45	10	850	3000	120	120°	10	2	5000	842154	1
07U352410IN ■	45	10	850	3500	120	120°	10	2	5000	932152	1
07U402410IN	45	10	900	4000	120	120°	10	2	5000	848569	1
07U602410IN ■	45	10	900	6000	120	120°	10	2	5000	848477	1
07U222412IN ■	60	12	1150	2200	120	120°	10	2	5000	848538	1
07U272412IN	60	12	1150	2700	120	120°	10	2	5000	848545	1
07U302412IN	60	12	1150	3000	120	120°	10	2	5000	848552	1
07U352412IN ■	60	12	1150	3500	120	120°	10	2	5000	932169	1
07U402412IN	60	12	1200	4000	120	120°	10	2	5000	848576	1
07U602412IN ■	60	12	1200	6000	120	120°	10	2	5000	848484	1
07U222415IN ■	75	15	1350	2200	120	120°	10	2	5000	842239	1
07U272415IN	75	15	1350	2700	120	120°	10	2	5000	842253	1
07U302415IN	75	15	1350	3000	120	120°	10	2	5000	841782	1
07U352415IN ■	75	15	1350	3500	120	120°	10	2	5000	932176	1
07U402415IN	75	15	1400	4000	120	120°	10	2	5000	848583	1
07U602415IN ■	75	15	1400	6000	120	120°	10	2	5000	848491	1

⁽¹⁾ Single circuit: L70 = 30.000h. Warranty 3 years.

■ Limited availability - reorderable only with MOQ



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



DRIVER



24/25W - 45W IP20	SLD-50-24
60W - 75W IP20	SLD-80-24

CONTROLLER



DALI-ZKTPC (DALI)
ZKCDAFF (DALI)
ZKCDMXWFF (DMX)
ZKC1-10FF (1-10)
FF = FLICKER FREE

PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161