

DURASTRIP PRO240 IP65

LED

LED 2358
240 LED/m
70W (14W/m) - 95W (19W/m) - 120W (24W/m)
24VDC
Ra >95
Lifetime: >50,000 h
Warranty: 5 years

COLOURS OF LIGHT

Choice of white colour temperature

BINNING

ANSI/SDCM: 3 step.
2700K - 3000K - 4000K - 6000K

DIMMABILITY

Dimmable 0-100%
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCA controllers
CASAMBI compatible

CONNECTIONS

Complete with a 15 cm long IP65/68 M/F cable on 2 sides. Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, diagram on page 160.

Strips can be cut to size by following the cutting indications printed on the strips. For IP65/IP68 strips restore the IP protection after cutting.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.


Always use with aluminium profiles for heat dissipation.

PACKAGE

Packaged in 5 m reels.
Or custom products cut to specific lengths see page 11, 318.

PRO240 is a range of strips with significant power, up to 70W/m. With an efficiency of 110lm/W and thanks to a narrow space between the LED sources, PRO240 is the strip to use when strong light emission is required, for example for installations at great heights. At the same time it guarantees extreme uniformity and colour reliability, made superlative by Ra>95. PRO240 are new generation strips which are increasingly efficient and reliable over time. Available in an IP20 and IP65 version.

LED SPACING AND PITCH CUT

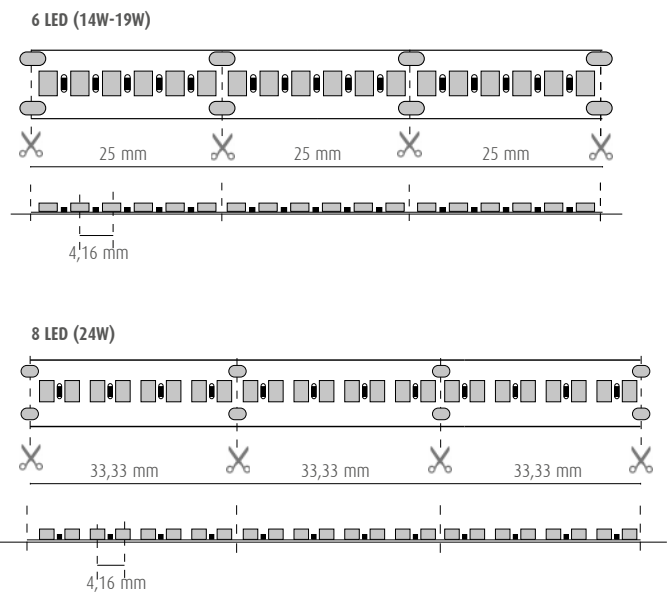

Cutting DURASTRIP to size*:

fixed cost of piece work

VA01

* Please consider pitch cut. Includes a 20 cm cable.



14W - 19W



24W

DURASTRIP PRO240 IP65


PRO	24V DC	Ra>95	50000h L70 B20	IP65	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0	MIN 2mm	NO DOT
------------	-----------	-------	-------------------	------	---------------	-----	---------------	--------	-----------------	------------	-----------

art.	W	W/m	lm/m	K	N° LED/m	□	L	L1	L2	8011905	
07U272414EX-TB	70	14	1260	2700	240	120°	12	5	5000	954291	1
07U302414EX-TB	70	14	1330	3000	240	120°	12	5	5000	954307	1
07U402414EX-TB	70	14	1400	4000	240	120°	12	5	5000	954314	1
07U602414EX-TB	70	14	1400	6000	240	120°	12	5	5000	954321	1
07U302419EX-TB*	95	19	1710	3000	240	120°	12	5	5000	954345	1
07U402419EX-TB*	95	19	1800	4000	240	120°	12	5	5000	954352	1
07U402419EX-TB*	95	19	1800	4000	240	120°	12	5	5000	954352	1
07U602419EX-TB*	95	19	1800	6000	240	120°	12	5	5000	954369	1
07U272424EX-TB*	120	24	1980	2700	240	120°	12	5	5000	954376	1
07U302424EX-TB*	120	24	2090	3000	240	120°	12	5	5000	954383	1
07U402424EX-TB*	120	24	2200	4000	240	120°	12	5	5000	954390	1
07U602424EX-TB*	120	24	2200	6000	240	120°	12	5	5000	954406	1

* Always use with aluminium profiles for heat dissipation.



art	Additional cut and mount kit for Strip IP68 and IP65	80119058	
KT68PA	This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws, 10 end caps	48460	1



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



DRIVER



70W - 95W IP65	XLG-100-24-A
120W IP65	XLG-150-24-A

CONTROLLER



DALI-ZKTPC (DALI)
ZKCDAFF (DALI)
ZKCDMXWFF (DMX)
ZKC1-10FF (1-10)
FF = FLICKER FREE

PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161