

# DURASTRIP PRO70 IP20

## LED

LED 2835  
70 LED/m  
38W (7,2W/m) - 50W (10W/m) - 70W (14W/m)  
24VDC  
Ra >90  
Lifetime: >50,000 h  
Warranty: 5 years

## COLOURS OF LIGHT

Choice of white colour temperature

## BINNING

ANSI/SDCM: 3 step.  
2700K - 3000K - 4000K - 6000K

## DIMMABLE

Dimmable 0-100%  
DALI - DMX - 1-10  
Analogue and digital domotic control systems  
Push Dali with ZKCA controllers  
CASAMBI compatible

## CONNECTIONS

IP20: terminals with free wires  
Maximum connection length 5 m. Max 4A.  
For longer connections, connect in series or parallel, diagram on page 160.  
Strips can be cut to size by following the cutting indications printed on the strips.

## ASSEMBLY


Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

## PACKAGE

Packaged in 5 m reels.  
Or custom products cut to specific lengths see page 11, 318.

DURASTRIP PRO70 were designed to satisfy the range of use that requires an excellent product as well as cost optimisation. The PRO70 range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time. Available in an IP20 and IP65 version.

## LED SPACING AND PITCH CUT

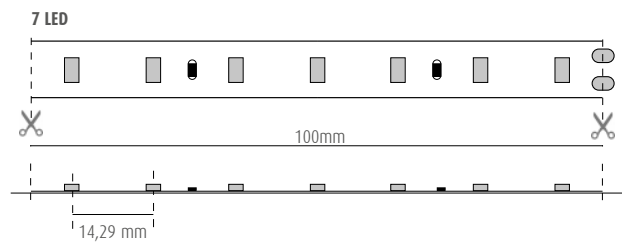

Cutting DURASTRIP to size\*:

fixed cost of piece work

VA01

\* Please consider pitch cut. Includes a 20 cm cable.




# DURASTRIP PRO70 IP20

<b>PRO</b>	24V DC	Ra>90	50000h L70 B20	IP20	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0	MIN 6mm  NO DOT		
------------	--------	-------	----------------	------	---------------	-----	------------	--------	--------------	-----------------	--	--

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2		
<b>07U302407IN-SB</b> ♦	36	7,2	730	3000	70	120°	10	1	5000	8011905	1
<b>07U402407IN-SB</b> ♦	36	7,2	780	4000	70	120°	10	1	5000	954697	1
<b>07U602407IN-SB</b> ♦	36	7,2	780	6000	70	120°	10	1	5000	954727	1
<b>07U272410IN-SB</b> ♦	50	10	990	2700	70	120°	10	1	5000	954611	1
<b>07U302410IN-SB</b> ♦	50	10	1045	3000	70	120°	10	1	5000	954642	1
<b>07U402410IN-SB</b> ♦	50	10	1100	4000	70	120°	10	1	5000	954673	1
<b>07U602410IN-SB</b> ♦	50	10	1100	6000	70	120°	10	1	5000	954703	1
<b>07U302414IN-SB</b> ♦	70	14	1280	3000	70	120°	10	1	5000	954659	1
<b>07U402414IN-SB</b> ♦	70	14	1350	4000	70	120°	10	1	5000	954680	1

♦ To be discontinued



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



## DRIVER



36W IP20	SLD-50-24
50W - 70W IP20	SLD-80-24

## CONTROLLER



<b>DALI-ZKTPC</b> (DALI)
<b>ZKCDAFF</b> (DALI)
<b>ZKCDMXWFF</b> (DMX)
<b>ZKC1-10FF</b> (1-10)
<b>FF = FLICKER FREE</b>

## PROFILES



UNIVERSAL PROFILES
SURFACE PROFILES
RECESSED PROFILES

DRIVER: complete info on page 161