

# DURASTRIP PRO70 IP65

## LED

LED 2835  
70 LED/m  
37W (7,2W/m) - 50W (10W/m) - 70W (14W/m)  
24VDC  
Ra >90  
Lifetime: >50,000 h  
Warranty: 5 years

## COLOURS OF LIGHT

Choice of white colour temperature

## BINNING

ANSI/SDCM: 3 step.  
2700K - 3000K - 4000K - 6000K

## DIMMABILITY

Dimmable 0-100%  
DALI - DMX - 1-10  
Analogue and digital domotic control systems  
Push Dali with ZKCA controllers  
CASAMBI compatible

## CONNECTIONS

Complete with a 15 cm long IP65/68 M/F cable on 2 sides. Maximum connection length 5 m. Max 4A.  
For longer connections, connect in series or parallel, diagram on page 160.  
Strips can be cut to size by following the cutting indications printed on the strips. For IP65/IP68 strips restore the IP protection after cutting.

## ASSEMBLY


Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

## PACKAGE

Packaged in 5 m reels.  
Or custom products cut to specific lengths see page 11, 318.

DURASTRIP PRO70 were designed to satisfy the range of use that requires an excellent product as well as cost optimisation. The PRO70 range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time. Available in an IP20 and IP65 version.

## LED SPACING AND PITCH CUT

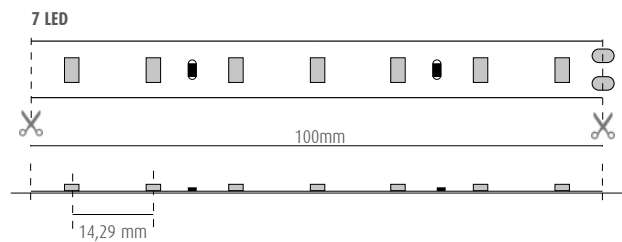

Cutting DURASTRIP to size\*:

fixed cost of piece work

VA01

\* Please consider pitch cut. Includes a 20 cm cable.




# DURASTRIP PRO70 IP65

<b>PRO</b>	24V DC	Ra>90	50000h L70 B20	IP65	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0	MIN 6mm	NO DOT
------------	--------	-------	----------------	------	------------	-----	------------	--------	--------------	---------	--------

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2		
<b>07U272407EX-SB</b> ♦	36	7,2	710	2700	70	120°	12	5	5000	8011905	1
<b>07U402407EX-SB</b> ♦	36	7,2	780	4000	70	120°	12	5	5000	954819	1
<b>07U602407EX-SB</b> ♦	36	7,2	780	6000	70	120°	12	5	5000	954840	1
<b>07U272414EX-SB</b> ♦	70	14	1215	2700	70	120°	12	5	5000	954741	1
<b>07U302414EX-SB</b> ♦	70	14	1280	3000	70	120°	12	5	5000	954772	1
<b>07U402414EX-SB</b> ♦	70	14	1350	4000	70	120°	12	5	5000	954802	1
<b>07U602414EX-SB</b> ♦	70	14	1350	6000	70	120°	12	5	5000	954833	1

♦ To be discontinued



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



## DRIVER



24/25W - 45W IP68	XLG-100-24-A
60W - 75W IP68	XLG-100-24-A

## CONTROLLER



- DALI-ZKTPC** (DALI)
- ZKCDAFF** (DALI)
- ZKCDMXWFF** (DMX)
- ZKC1-10FF** (1-10)
- FF = FLICKER FREE**

## PROFILES



- UNIVERSAL PROFILES
- SURFACE PROFILES
- RECESSED PROFILES

DRIVER: complete info on page 161