

# DURASTRIP WALL WASHER

## LED

LED 3030  
 30 LED/m  
 96W (19.2W/m)  
 24VDC  
 Ra >90  
 Lifetime: >30,000 h  
 Warranty: 3 years

## COLOURS OF LIGHT

Choice of white colour temperatures:  
 2700K - 3000K - 3500K - 4000K - 6500K

## BINNING

ANSI/SDCM: 3 step.

## DIMMABILITY

Dimmable 0-100%  
 DALI - DMX  
 Analogue and digital domotic control systems  
 Push Dali with ZKCDA controllers  
 CASAMBI compatible

## CONNECTIONS

IP67: complete with a 15 cm long M/F cable on 2 sides. Maximum connection length 5 m. Max 4A.  
 Strips can be cut to size by following the cutting indications printed on the strips. 2 PIN connectors included in kit code KT07UXOL allow strips to be linked up to a maximum run of 5 meters.

## ASSEMBLY



Installation requires metal clips, see separate accessories code.

## PACKAGE

Packaged in 5 m reels.  
 Or custom products cut to specific lengths see page 11, 322.

A minimal and unobtrusive light element providing a wall wash effect. By utilising an asymmetric reflector, the light is directed across the vertical surface, the efficiency of the LED's power is maximised to provide a uniform wash effect of light. The product is sealed to guarantee a high degree of Ingress Protection (IP67).

### LED SPACING AND PITCH CUT

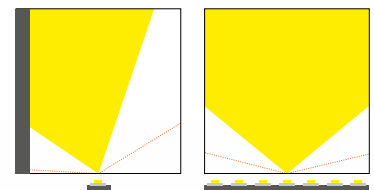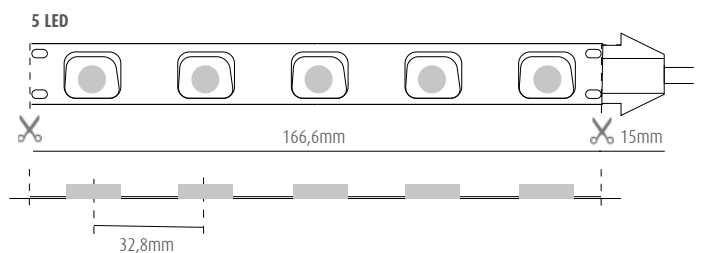


Cutting DURASTRIP to size\*:

fixed cost of piece work

VA01

\* Please consider pitch cut. Includes a 20 cm cable.

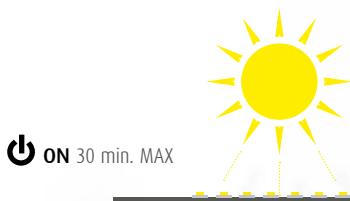




Exposure to sunlight max 30 minutes.



DURASTRIP



<b>PRO</b>	24V DC	Ra>90	30000h L70	IP67	-40° +45°C	III	ETL US	G3	Risk Group 0
------------	--------	-------	------------	------	---------------	-----	--------	----	--------------

art.	W	W/m	lm/m	K	N° LED/m		L	L1	L2	 8011905	
<b>07U272419XWA</b>	96	19,2	1400	2700	30	100°x 70°(40°+30°)	23	10,5	5000	966904	1
<b>07U302419XWA</b>	96	19,2	1450	3000	30	100°x 70°(40°+30°)	23	10,5	5000	966911	1
<b>07U352419XWA</b>	96	19,2	1450	3500	30	100°x 70°(40°+30°)	23	10,5	5000	966928	1
<b>07U402419XWA</b>	96	19,2	1500	4000	30	100°x 70°(40°+30°)	23	10,5	5000	966935	1
<b>07U602419XWA</b>	96	19,2	1500	6500	30	100°x 70°(40°+30°)	23	10,5	5000	966942	1

**Warning: this strip is 10,5 mm high. Due to the particular diffusion angle do not use in profiles that are closed with lenses.**

▪ Limited availability - reorderable only with MOQ




art	<b>Cut and mount kit for Strip IP67</b>	 8011905	
<b>KT07UXWL</b>	Includes 2 2 PIN connectors, 2 2 PIN male connector cables, 2 2 PIN female connector cables and UV glue, Kit 5 pcs End cap in PC	951023	1



art	<b>KT07UXWL-UV</b>	UV light for fast glue fixing	 8011905	
			651030	1



art	<b>KT07UXWL-CL</b>	Kit of 10 pcs of metal clips	 8011905	
			951047	1



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



#### DRIVER



96W IP67

XLG-100-24-A

#### CONTROLLER



**DALI-ZKTPC** (DALI)

**ZKCAFF** (DALI)

**ZKCDMXWFF** (DMX)

**ZKC1-10FF** (1-10)

**FF = FLICKER FREE**

DRIVER: complete info on page 161