

EXTRA NARROW DURASTRIP

LED

LED 2216: 180 LED/m - 7,2W/m
LED 2216: 300 LED/m - 11W/m
24VDC
Ra >90
Lifetime: >50,000 h
Warranty: 5 years

COLOURS OF LIGHT

Choice of white colour temperature.

BINNING

ANSI/SDCM: 2 step.
2200K - 2700K - 3000K - 4000K - 6000K

DIMMABILITY

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCA controllers
CASAMBI compatible

CONNECTIONS

IP20: terminals with free wires
Maximum connection length 5 m. Max 4A.
For longer connections, connect in series or parallel, diagram on page 160.
Strips can be cut to size by following the cutting indications printed on the strips.

ASSEMBLY

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape decrease the application surface adequately



PACKAGE

Packaged in 5 m reels.
Or custom products cut to specific lengths see page 11, 318.

The EXTRA NARROW series is a concentrate of quality materials that is shared with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration, Ra >90. EXTRA NARROW is the range with the smallest substrate in the entire collection. Just 5 mm or 6 mm wide, it solves all needs not only connected to confined spaces but above all, for characteristic lighting design.

To be used with thin section profiles from the range. The type of LED source used and the short distance between the light sources eliminate the speckled effect, even in profiles with lenses that are very close together.

LED SPACING AND PITCH CUT

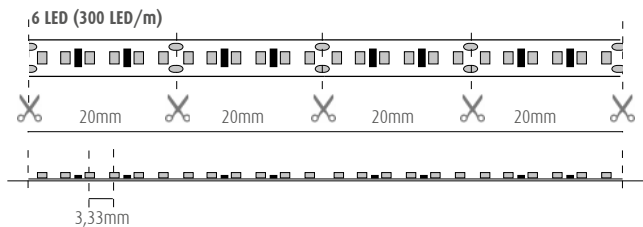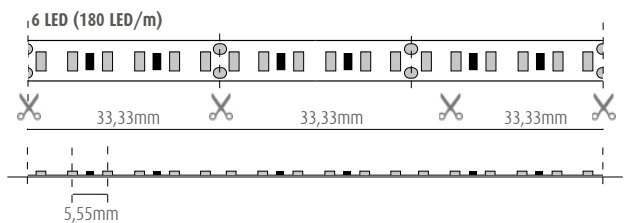

Cutting DURASTRIP to size*:

fixed cost of piece work

VA01

* Please consider pitch cut. Includes a 20 cm cable.

IP20



IP65



EXTRA NARROW DURASTRIP

PRO	24V DC	Ra>90	50000h L70	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0
------------	--------	-------	------------	---------------	-----	---------------	--------	--------------

MIN 2,5mm 1,5mm		NO DOT
-----------------------	--	-----------

IP20

art.	W/m	lm/m	K	N° LED/m		L	L1	L2		
07U222407INEN	7,2	515	2200	180	120°	5	1	5000	8011905	1
07U272407INEN	7,2	560	2700	180	120°	5	1	5000	923136	1
07U302407INEN	7,2	590	3000	180	120°	5	1	5000	923143	1
07U352407INEN	7,2	590	3500	180	120°	5	1	5000	932145	1
07U402407INEN	7,2	610	4000	180	120°	5	1	5000	923150	1
07U602407INEN	7,2	680	6000	180	120°	5	1	5000	923167	1

art.	W/m	lm/m	K	N° LED/m		L	L1	L2		
07U222411INUEN	11	720	2200	300	120°	6	1	5000	8011905	1
07U272411INUEN	11	720	2700	300	120°	6	1	5000	956622	1
07U302411INUEN	11	760	3000	300	120°	6	1	5000	956639	1
07U352411INUEN	11	760	3500	300	120°	6	1	5000	956646	1
07U402411INUEN	11	800	4000	300	120°	6	1	5000	956653	1
07U602411INUEN	11	800	6000	300	120°	6	1	5000	956660	1
07U602411INUEN	11	800	6000	300	120°	6	1	5000	956677	1


IP65

art.	W/m	lm/m	K	N° LED/m		L	L1	L2		
07U222411EXUEN	11	720	2200	300	120°	8	4	5000	8011905	1
07U272411EXUEN	11	720	2700	300	120°	8	4	5000	956684	1
07U302411EXUEN	11	760	3000	300	120°	8	4	5000	956691	1
07U352411EXUEN	11	760	3500	300	120°	8	4	5000	956707	1
07U402411EXUEN	11	800	4000	300	120°	8	4	5000	956714	1
07U602411EXUEN	11	800	6000	300	120°	8	4	5000	956721	1
07U602411EXUEN	11	800	6000	300	120°	8	4	5000	956738	1

▪ Limited availability - reorderable only with MOQ



art.	Additional cut and mount kit for Strip IP65		
KT65PA-EN	This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws, 10 end caps	8011905	966249
			1



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



DRIVER



36W IP20	SLD-50-24
55W IP20	SLD-80-24
55W IP65	XLG-100-24-A

CONTROLLER



DALI-ZKTPC (DALI)
ZKCAFF (DALI)
ZKCDMXWF (DMX)
ZKC1-10FF (1-10)
FF = FLICKER FREE

DRIVER: complete info on page 161